


Modular PLC series

CQM1H

The original modular PLC system for versatile machine control

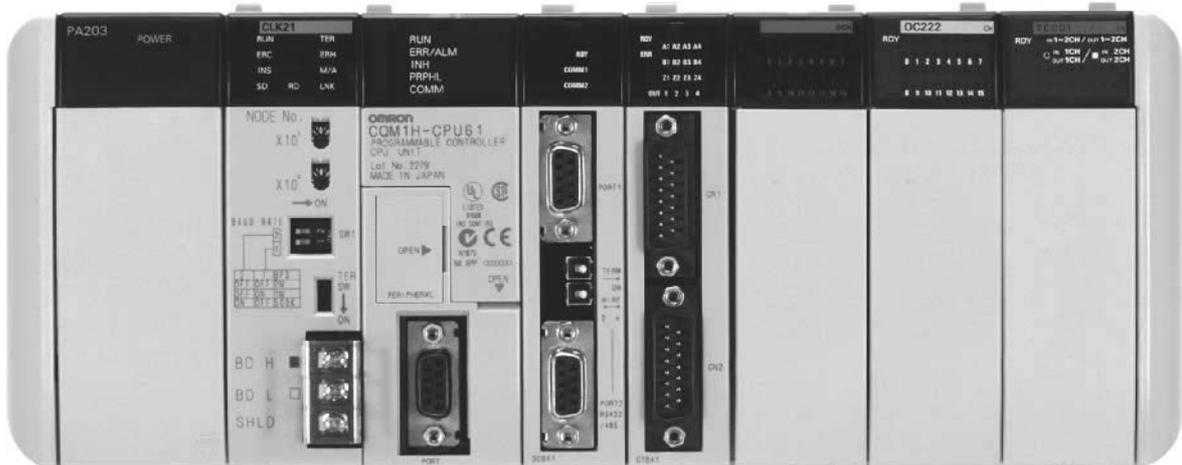

Distributed control with the high-speed, high-capacity Controller Link network

Use Controller Link to automatically exchange data between PLCs, and to maintain programs and data of all connected PLC's from a single PC. You can share operating data among machines without any programming, and centralize the supervision of machine productivity, production progress and quality data.


Advanced inner boards enable flexible system configuration

Advanced Inner Boards can be added to the CPU Unit to respond flexibly to the applications of each machine. Use of the Serial Communications Board, for example, enables connection with peripheral components, like temperature controllers and bar-code readers, that are equipped with serial ports. This kind of flexibility lets you build systems that better match the specifications and scale of the machine or equipment being controlled.

I/O points and memory capacity doubled to provide an extra margin of control

The I/O capacity, program capacity, and Data memory have been doubled over those of previous CQM1 models. This gives you an extra margin of control to meet the data processing load that accompanies the growing complexity and advanced functions of today's control systems, and assures you of plenty of capacity for the I/O points of dedicated I/O Units for your applications.


Establish distributed control with the Controller Link Network to transfer data easily between PLCs in the network.

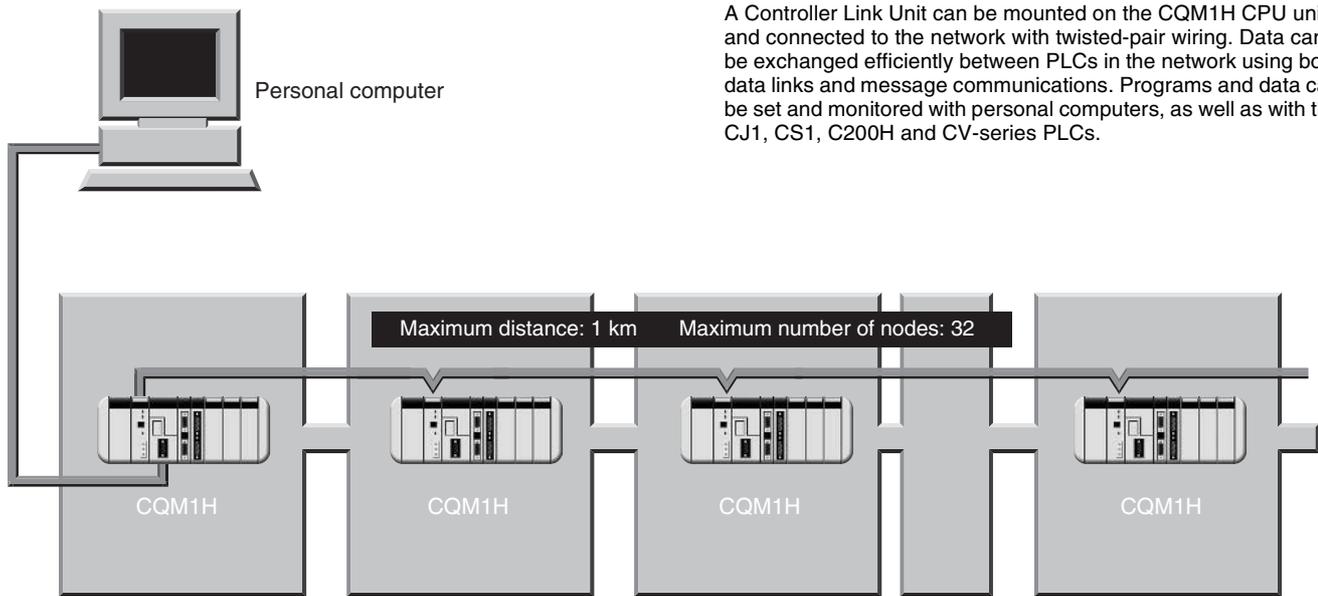

A Controller Link Unit can be mounted on the CQM1H CPU unit, and connected to the network with twisted-pair wiring. Data can be exchanged efficiently between PLCs in the network using both data links and message communications. Programs and data can be set and monitored with personal computers, as well as with the CJ1, CS1, C200H and CV-series PLCs.

Advanced Inner Boards allow flexible system configurations.

A variety of advanced Inner Boards, such as the High-speed Counter Board and Serial Communications Board, are available. Mount the desired Inner Board in the CPU Unit to meet the requirements of each machine application. A Serial Communications Board can communicate with essentially any device with a serial port, such as temperature controllers or bar-code readers. The optimum system can be configured to match the specifications and scale of the machine or equipment being controlled.

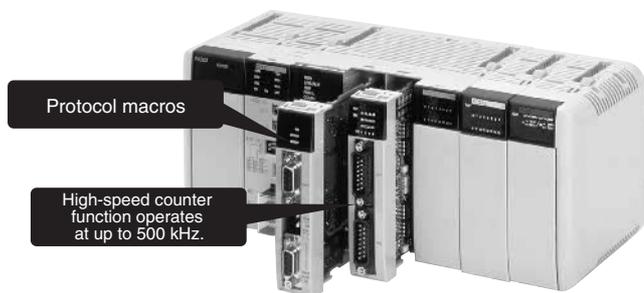

Increased capacity and speed provide extra capacity for control applications.

The program capacity, I/O capacity, and DM capacity have been doubled compared to the original CQM1 series. A 16 Kword Memory Cassette can be installed to accommodate the storage and transfer of the program. Furthermore, the execution times have been reduced from 0.50 ms to 0.375 ms for basic instructions and from 23.5 ms to 17.7 ms for special instructions (MOV). Overall, the cycle time has been reduced by about 25%.


Flexible System Configuration

The CQM1H does not require a Backplane and is constructed by connecting Units via a parallel bus connector at the side of each Unit, allowing flexible system configuration and the most efficient use of space. The CPU Unit contains 16 built-in DC input points. Two Inner Boards can be mounted in the CPU Unit. One Controller Link Unit (a Communications Unit) and a combined maximum of eleven I/O Units can also be connected.




Improve Communications Compatibility with the Serial Communications Board.

Connections can be easily made to general-purpose machine components and dedicated controllers. The Serial Communications Board (a CPU Inner Board) supports protocol macros. You can create macros for protocols to match the communications specifications of an external device, allowing data transfers with devices such as temperature controllers and bar code readers to be executed with a single PMCR instruction in the PLC program..

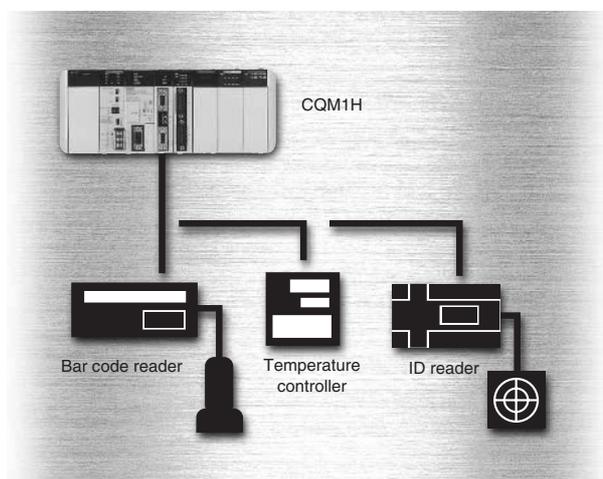

Establish High-speed/Long-distance Communications with CompoBus/S.

Connect a CompoBus/S Master Unit to the CQM1H to establish high-speed or long-distance remote I/O communications with CompoBus/S Slaves.

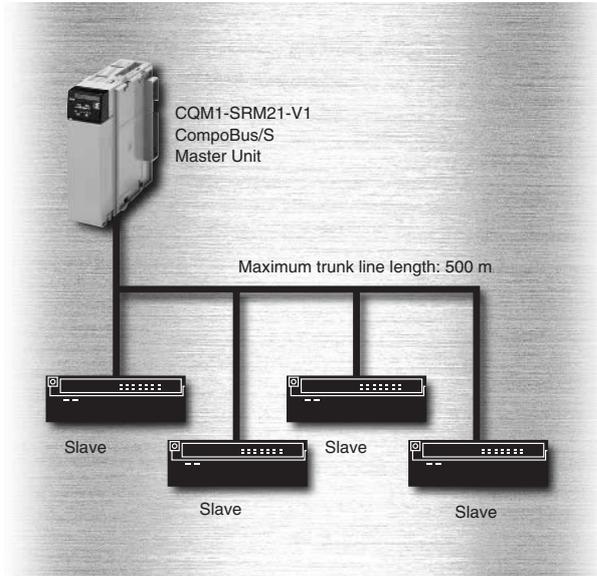

Use Existing System Components and Programs.

All existing CQM1 Power Supply Units, Basic I/O Units, Dedicated I/O Units, programs, Programming Consoles, and Memory Cassettes can be used, so a system upgrade can be performed very smoothly.

Easy-to-use Support Software

The Windows-based CX-Programmer Support Software reduces software development time and provides powerful monitoring and debugging functions. Data exchange with other Windows applications is available through ActiveX, OLE, OPC and standard file formats.

The CQM1H is equipped with the protocol macro function. Protocol macros allow specific serial communications protocols to be developed to transfer data to and from external devices. Custom protocol macros can be created easily with the Windows-based CX-Protocol Software.


Advanced Math and Communications Instructions

Many advanced instructions have been added to the CQM1H, including floating-point math instructions, exponential/logarithm instructions, trigonometric instructions, the TTIM (TOTALIZING TIMER) instruction, PMCR (PROTOCOL MACRO) instruction, STUP (CHANGE SERIAL PORT SETUP) instruction, and network (SEND, RECV, and CMND) instructions. These advanced instructions are easy-to use and simplify program development.

A Wealth of Monitoring and Setting Methods Greatly Improve the HMI.


Programming Devices and Programmable Terminals (PTs) can be connected to up to four communication ports. You can set up and monitor machine control from a PT while monitoring or programming from a Programming Console or a personal computer. It is also possible to monitor and program the PLC remotely from a personal computer connected through a modem.

- Omron's Programmable Terminals now support program and monitor functions for easy PLC maintenance.
- Program and monitor from a remote location by modem.

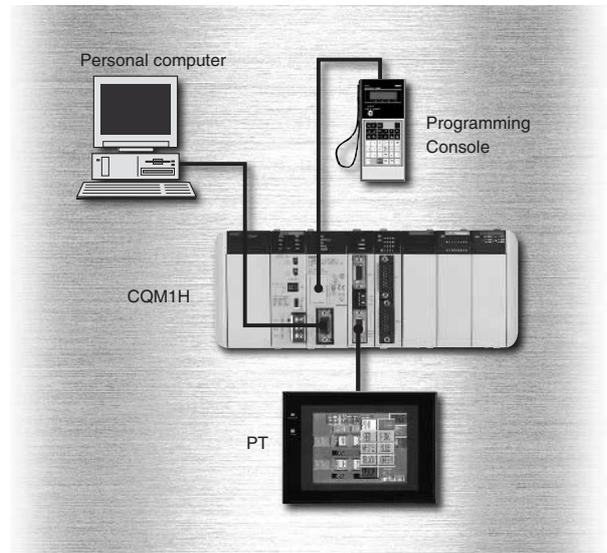

Flexible system configuration adds value to machine control. A high-performance, modular PLC for stand-alone or distributed control.

SYSMAC CQM1H

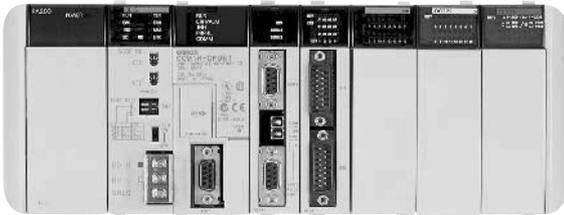

In response to growing demands for more advanced functions and higher speeds in machine control, the CQM1H lets you add value through greater power. This compact PLC boasts a long list of leading-edge functions, including distributed control compatibility, versatile Inner Boards for easy, add-on expandability, increased program and DM capacity, and an efficient, Windows-based development environment. Let the CQM1H help you start building machines that easily beat the competition.

CPU Units

Four CPU Unit models are available. Two of them support Inner Boards and a Controller Link Unit. You can select the CPU Unit that best suits your application according to program capacity, I/O capacity, memory size, and RS-232C port communication functions. The following table shows the specifications of each CPU Unit.



CQM1H-CPU61



CQM1H-CPU51




CQM1H-CPU21



CQM1H-CPU11

Power Supply Units

Both AC and DC Power Supply Units are available. The AC Power Supply Units require a power supply input in the range 100 to 240 V AC and two models are equipped with a 24-V DC power supply output. The CQM1H's left End Cover is part of the Power Supply Unit. Refer to the CQM1H Operation Manual (W363) for details on selecting a Power Supply Unit.

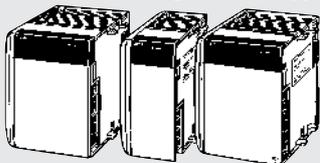


- AC Power Supply Units
CQM1-PA206
CQM1-PA216
- AC Power Supply Units
CQM1-PA203
- DC Power Supply Units
CQM1-PD026

Memory Cassettes (Optional)

Memory Cassettes are available with flash memory, EEPROM and EPROM. Store data on the Memory Cassette to avoid losing program or DM data in the event of battery expiration or careless programming/monitoring operations. The program and data can be transferred between the CPU Unit's RAM and the Memory Cassette. (Data can be transferred from the CPU Unit's RAM to Memory Cassettes with flash memory or EEPROM only.)

● Built-in clock
When a Memory Cassette with a built-in clock is installed, time and date information can be used in the program.

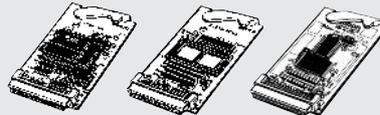


■EEP-ROM ■EP-ROM ■Flash memory

Controller Link Unit

Connect a Controller Link Unit to the CQM1H to integrate it into a Controller Link Network. Large quantities of data can be transferred easily and flexibly with personal computers, as well as with other CS1, CJ1, C200H and CV-series PLCs.


* The CQM1H-CPU51 and CQM1H-CPU61 support Controller Link Units.



CQM1H-CLK21

Inner Boards

The six Inner Boards are shown below. Inner Boards can be mounted in slot 1 or slot 2 of a CQM1H-CPU51 or CQM1H-CPU61. (Some Inner Boards can be mounted only in slot 1 or only in slot 2.)

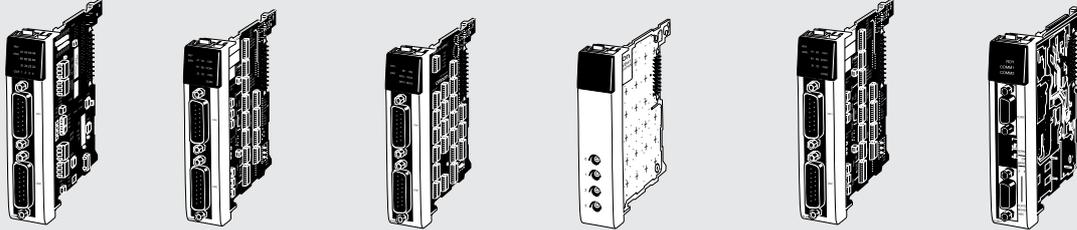


- High-speed Counter Board CQM1H-CTB41
- Pulse I/O Board CQM1H-PLB21
- Absolute encoder Board CQM1H-ABB21
- Analog setting Board CQM1H-AVB41
- Analog I/O Board CQM1H-MAB42
- Serial Communications Board CQM1H-SCB41

Input Units

Select from AC or DC Input Units with 8 to 32 input points.


- DC Input Units
CQM1-ID211
CQM1-ID111
CQM1-ID212
CQM1-ID213
CQM1-ID214
CQM1-ID112
- AC Input Units
CQM1-IA121
CQM1-IA221

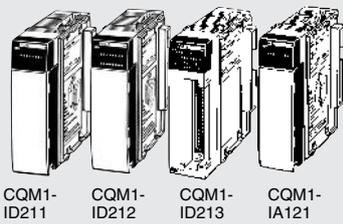

Output Units


Select from relay outputs, transistor outputs or triac outputs with 8 to 32 output points.

- Relay Contact Output Units
CQM1-OC221
CQM1-OC222
CQM1-OC224
- Transistor Output Units
CQM1-OD211
CQM1-OD212
CQM1-OD213
CQM1-OD214
CQM1-OD215
CQM1-OD216
- AC Output Units
CQM1-OA221
CQM1-OA222

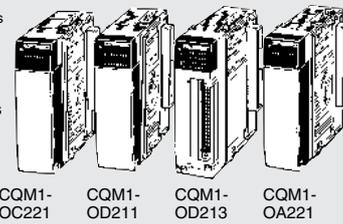

I/O Expansion Units

- CQM1H-IC101
I/O Control Unit
- I/O Interface Unit
CQM1H-II101

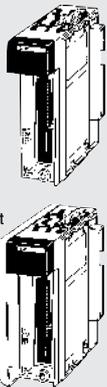


Dedicated I/O Units

- Analog Output Unit
CQM1-DA022
Performs digital-to-analog conversion for two outputs.
- CompoBus/S Master Unit
CQM1-SRM21-V1
A high-speed Remote I/O Master Unit that controls up to 128 I/O points supports a long-distance communication up to 500 m.
- Temperature Control Units
CQM1-TC00□
CQM1-TC10□
CQM1-TC20□
CQM1-TC30□
One Unit can receive data from two or four temperature sensors and executes advanced PID control.



- Analog Input Unit
CQM1H-AD042
Receives 4 analog voltage or current inputs into the CQM1H.
- DeviceNet I/O Link Unit
CQM1-DRT21
Operates as a DeviceNet slave to establish an I/O link of 32 I/O points with a DeviceNet Master.
- Linear Sensor Interface Units
CQM1-LSE01/02
Make high-speed and high-precision measurements of analog inputs from linear sensors and convert the measurements to numeric data for processing.

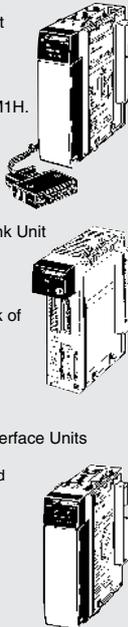

- PROFIBUS-DP I/O Link Unit
CQM1-PRT21
PROFIBUS-DP slave unit provides an I/O link of 2 to 8 I/O words with any Master Unit.
- AS-Interface Master Unit
CQM1-ARM21
Controls up to 31 standard AS-Interface slaves. No special configuration tools are required.
- B7A Interface Unit
CQM1-B7A□□
Five Units are available that can connect with B7A Link Terminals.



- Safety Relay Unit
CQM1-SF200
Monitors safety circuit status and allows space saving.



CQM1H CPU Units


CQM1H-CPU□□

CPU Units

The four models of CPU Units can be broadly divided into two groups: Models that support Inner Boards and the Controller Link Unit, and models that do not. The CPU Units also vary in their program capacities, I/O capacities, memory capacities, and the presence of an RS-232C port, as shown in the *Basic Specifications* table, below.

CPU Unit Overview

The following illustration shows the main components of a CQM1H-CPU61 CPU Unit.

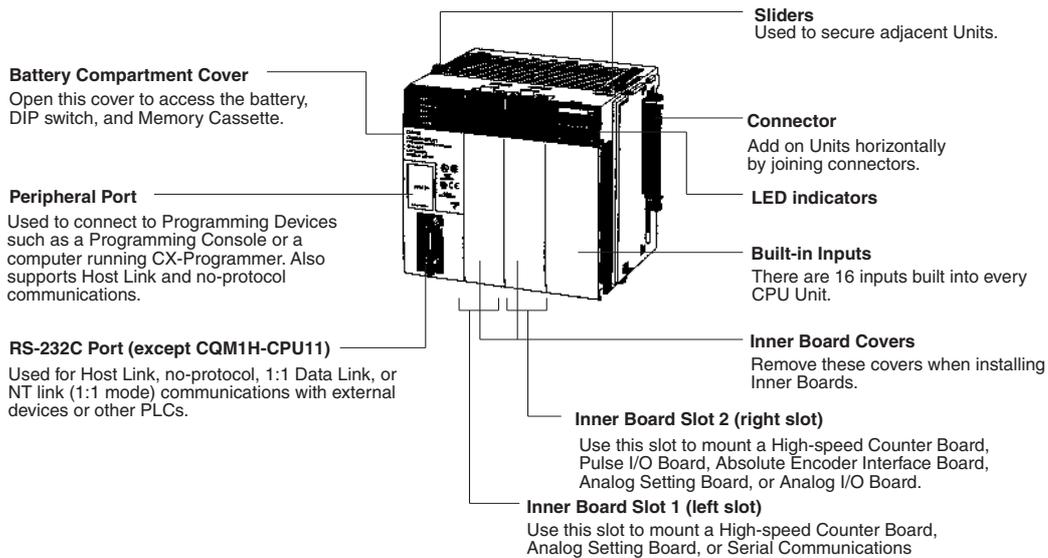

Basic Specifications

| Model | I/O capacity (See note.) | Program capacity (words) | DM capacity (words) | EM capacity (words) | CPU Unit built-in inputs | Built-in serial ports | | Inner Boards | Controller Link Unit |
|-------------|--------------------------|--------------------------|---------------------|---------------------|--------------------------|-----------------------|--------------|---------------|----------------------|
| | | | | | | Peripheral port | RS-232C port | | |
| CQM1H-CPU61 | 512 | 15.2 K | 6 K | 6 K | DC: 16 | Yes | Yes | Supported | |
| CQM1H-CPU51 | | 7.2 K | 6 K | None | | | | | |
| CQM1H-CPU21 | 256 | 3.2 K | 3 K | | | | No | Not supported | |
| CQM1H-CPU11 | | | | | | | | | |

Note: I/O capacity = Number of input points (≤ 256) + Number of output points (≤ 256).


Maximum Number of Units

| CPU Unit | Controller Link Unit | Inner Boards | I/O Units and Dedicated I/O Units |
|-------------|----------------------|----------------|-----------------------------------|
| CQM1H-CPU61 | 1 max. | 2 max. | 11 max. (total) |
| CQM1H-CPU51 | | | |
| CQM1H-CPU21 | Not supported. | Not supported. | |
| CQM1H-CPU11 | | | |

Power Supply Units

Both AC and DC Power Supply Units are available. The AC Power Supply Units require a power supply input from 100 to 240 V AC and two of the AC Power Supply Units are equipped with a 24-V DC power supply output.

The CQM1H's left End Cover is part of the Power Supply Unit.

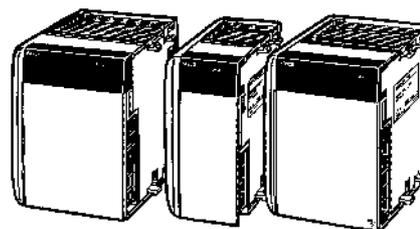

CQM1-PA206 CQM1-PA203 CQM1-PD016
CQM1-PA216 CQM1-PD026

Specifications

| Name | Model number | Specifications | | | |
|-----------------------|--------------|--|-------------------------|--|----------------------|
| | | Supply voltage | Operating voltage range | Output capacity | Service power supply |
| AC Power Supply Units | CQM1-PA203 | 100 to 240 V AC, 50/60 Hz (wide range) | 85 to 265 V AC | 5 V DC: 3.6 A (18 W) | None |
| | CQM1-PA206 | | | 5 V DC: 6 A 24 V DC: 0.5 A (30 W total, see note) | |
| | CQM1-PA216 | 100 or 230 V AC (selectable), 50/60 Hz | | 5 V DC: 6 A 24 V DC: 0.5 A (30 W total, see note) | |
| DC Power Supply Units | CQM1-PD026 | 24 V DC | 20 to 28 V DC | 30 W 5 V DC: 6 A | None |

Note: The total power consumed at 5 V DC and 24 V DC must be less than 30 W.
 $(5 \times \text{Current consumed at 5 V DC}) + (24 \times \text{Current consumed at 24 V DC}) \leq 30 \text{ W}$

I/O Expansion Units

Use Expansion I/O Blocks to split the configuration into 2 groups, allowing greater flexibility with mounting space as well as the use of at least 12 I/O Units or Dedicated I/O Units. Expansion Units can be used with any CQM1H CPU Unit.




Maximum Number of Units Mountable

| CPU Unit model | CPU Block only | CPU Block + I/O Expansion Block | | | |
|----------------|--|-----------------------------------|---------------|---------------------------------|--|
| | CPU Block I/O Units + Dedicated I/O Units | CPU Block Controller Link Unit | Inner Boards | I/O Units + Dedicated I/O Units | I/O Expansion Block I/O Units + Dedicated I/O Units |
| CQM1H-CPU61 | 11 Units max. (see note 1) | 1 Unit | 2 Boards max. | 5 Units max. (see note 2) | 11 Units max. (see note 3) |
| CQM1H-CPU51 | | Not supported | Not supported | | |
| CQM1H-CPU21 | | | | | |
| CQM1H-CPU11 | | | | | |

- Note:**
1. Ensure that the total current consumption of the mounted Units (CPU Unit, Controller Link Unit, Inner Boards, I/O Units, and Dedicated I/O Units)
 2. Ensure that the total current consumption of the mounted Units (CPU Unit, Controller Link Unit, Inner Boards, I/O Units, Dedicated I/O Units, and I/O Control Units) does not exceed 3.0 A.
 3. Ensure that the total current consumption of the mounted Units (I/O Interface Units, I/O Units, and Dedicated I/O Units) does not exceed 2.0 A.

System Configuration

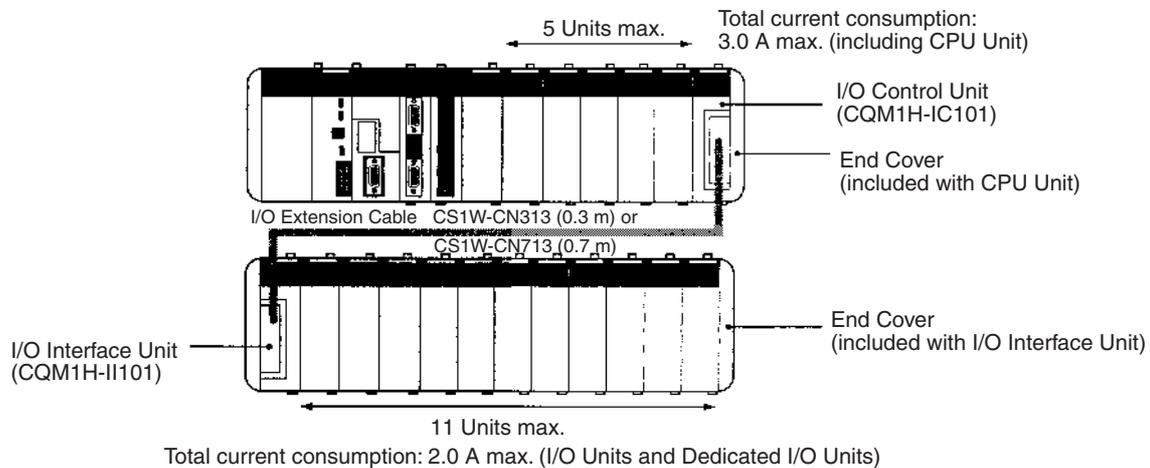


Memory Cassettes

An optional Memory Cassette can be used to store the user program, PLC Setup, and other data in ROM so that vital data will not be lost in the event of battery expiration or careless programming/monitoring operations.

If the PLC's settings need to be changed to execute another process, the entire software setup and user program can be changed just by exchanging the Memory Cassette and rebooting the PLC.


EEPROM:

- CQM1-ME04K
- CQM1-ME04R
- CQM1-ME08K
- CQM1-ME08R

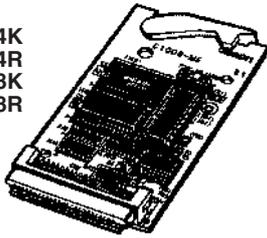


Flash Memory:

- CQM1H-ME16K
- CQM1H-ME16R

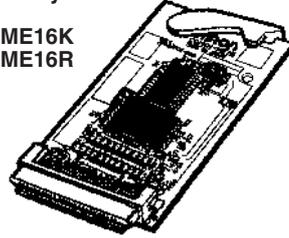

EPROM:

- CQM1-MP08K
- CQM1-MP08R

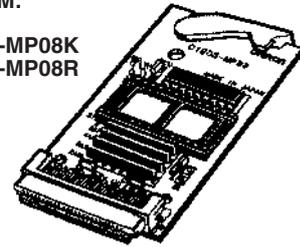

Available Memory Cassettes

The following Memory Cassettes are available.

| Memory | Model | Specifications |
|--------|-------------|---------------------------|
| EEPROM | CQM1-ME04K | 4 kWords without clock |
| | CQM1-ME04R | 4 kWords with clock |
| | CQM1-ME08K | 8 kWords without clock |
| | CQM1-ME08R | 8 kWords with clock |
| EPROM | CQM1-MP08K | Without clock (see below) |
| | CQM1-MP08R | With clock (see below) |
| Flash | CQM1H-ME16K | 16 kWords without clock |
| | CQM1H-ME16R | 16 kWords with clock |

The following EPROM chips (sold separately) are required for EPROM Memory Cassettes. The chip is mounted in the I/O socket on the Memory Cassette.

| Model | ROM version | Capacity | Access speed |
|----------|---------------------|-----------|--------------|
| ROM-ID-B | 27128 or equivalent | 8 kWords | 150 ns |
| ROM-JD-B | 27256 or equivalent | 16 kWords | 150 ns |
| ROM-KD-B | 27512 or equivalent | 32 kWords | 150 ns |

Specifications

General (Power Supplies and CPU Units)

| Item | CQM1-PA203 | CQM1-PA206 | CQM1-PA216 | CQM1-PD026 |
|------------------------------|--|--|--|--------------------|
| Supply voltage | 100 to 240 V AC, 50/60 Hz | | 100 or 230 V AC (selectable), 50/60 Hz | 24 V DC |
| Operating voltage range | 85 to 264 V AC | | 85 to 132 V AC or 170 to 264 V AC | 20 to 28 V DC |
| Operating frequency range | 47 to 63 Hz | | | --- |
| Power consumption | 60 VA max. | 120 VA max. | | 50 W max. |
| Inrush current | 30 A max. | | | |
| Output capacity | 5 V DC: 3.6 A (18 W) | 5 V DC: 6 A 24 V DC: 0.5 A (30 W total) | | 5 V DC: 6 A (30 W) |
| Insulation resistance | 20 MΩ min. (at 500 V DC) between AC external terminals and GR terminals (Eee Note) | | | |
| Dielectric strength | 2,300 V AC 50/60 Hz for 1 min between AC external and GR terminals, leakage current: 10 mA max. (see note) 1,000 V AC 50/60 Hz for 1 min between DC external and GR terminals, leakage current: 20 mA max. (see note) | | | |
| Noise immunity | Conforms to IEC61000-4-4, 2 kV (power lines) | | | |
| Vibration resistance | 10 to 57 Hz with an amplitude of 0.075 mm, and 57 to 150 Hz with an acceleration of 9.8 m/s ² in the X, Y, and Z directions for 80 minutes each (i.e., swept for 8 minutes, 10 times). | | | |
| Shock resistance | 147 m/s ² (118 m/s ² for Contact Output Units) 3 times each in X, Y, and Z directions | | | |
| Ambient temperature | Operating: 0 to 55 °C Storage: -20 to 75 °C (except battery) | | | |
| Ambient operating humidity | 10% to 90% (no condensation) | | | |
| Operating environment | No corrosive gas | | | |
| Ground | Less than 100 Ω | | | |
| Construction | Panel mounted | | | |
| Weight | 5 kg max. | | | |
| Internal current consumption | CQM1H-CPU11:820 mA max. at 5 V DC CQM1H-CPU21/51/61:840 mA max. at 5 V DC | | | |
| Dimensions (without cables) | CQM1H-CPU11/21:187 to 571 × 110 × 107 mm (W×H×D) CQM1H-CPU51/61:187 to 603 × 110 × 107 mm (W×H×D) | | | |
| Accessories | RS-232C connector (one XM2A-0901 Plug and one XM2S-0911-E Hood) (except CQM1H-CPU11) CPM2A-BAT01 Battery Set (installed in CPU Unit when shipped) | | | |

Note: Disconnect the Power Supply Unit's LG terminal from the GR terminal when testing insulation and dielectric strength. Repeatedly testing the insulation and dielectric strength with the LG terminal and the GR terminals connected will damage internal circuits in the CPU Unit.

CPU Unit

Characteristics

| Item | Specifications | |
|--|--|--|
| Control method | Stored program method | |
| I/O control method | Cyclic scan and direct output/immediate interrupt processing | |
| Programming language | Ladder-diagram programming | |
| I/O capacity | CQM1H-CPU11/21:256 CQM1H-CPU51/61:512 | |
| Program capacity | CQM1H-CPU11/21: 3.2 kWords CQM1H-CPU51: 7.2 kWords CQM1H-CPU61: 15.2 kWords | |
| Data memory capacity | CQM1H-CPU11/21: 3 kWords CQM1H-CPU51: 6 kWords CQM1H-CPU61: 12 kWords (DM: 6 kWords; EM: 6 kWords) | |
| Instruction length | 1 step per instruction, 1 to 4 words per instruction | |
| Number of instructions | 162 (14 basic, 148 special instructions) | |
| Instruction execution times | Basic instructions: 0.375 to 1.125 μ s Special instructions:17.7 μ s (MOV instruction) | |
| Overseeing time | 0.70 ms | |
| Mounting structure | No Backplane (Units are joined horizontally using connectors) | |
| Mounting | DIN rail mounting (screw mounting not possible) | |
| CPU Unit built-in DC input points | 16 | |
| Maximum number of Units | CPU Block only: 11 Units (I/O Units and Dedicated I/O Units) max. CPU Block and Expansion I/O Block CPU Block: 5 Units max. Expansion I/O Block: 11 Units max. | |
| Inner Boards | CQM1H-CPU11/21:None CQM1H-CPU51/61:2 Boards | |
| Communications Units (Controller Link Unit) | CQM1H-CPU11/21:None CQM1H-CPU51/61:1 Unit | |
| Types of interrupts | Input interrupts (4 inputs max.) | Input Interrupt Mode: Interrupts are executed in response to inputs from external sources to the CPU Unit's built-in input points. Counter Mode: Interrupts are executed in response to reception of a set number of pulses (counted down) via the CPU Unit's internal built-in input points (4 points). |
| | Interval timer interrupts (3 timers max.) | Scheduled Interrupt Mode: Program is interrupted at regular intervals measured by one of the CPU Unit's internal timers. One-shot Interrupt Mode: An interrupt is executed after a set time, measured by one of the CPU Unit's internal timers. |
| | High-speed counter interrupts | Target Value Comparison: Interrupt is executed when the high-speed counter PV is equal to a specified value. Range Comparison: Interrupt is executed when the high-speed counter PV lies within a specified range. Note: Counting is possible for high-speed counter inputs from the CPU Unit's internal input points, Pulse I/O Boards, or Absolute Encoder Interface Boards. (The High-speed Counter Board has no interrupt function, but can output bit patterns internally and externally.) |
| I/O allocations | I/O is automatically allocated in order from the Unit nearest to the CPU Unit. (Because there are no I/O tables, it is not necessary, and not possible, to create I/O tables from a Programming Device.) | |

Note: Analog Power Supply Units must also be counted.

Memory Area Structure

| Data area | | Size | Words | Bits | Function |
|------------------------------|---------------------------------|--|----------------------|--|---|
| IR area | Input area | 256 bits | IR 000 to IR 015 | IR 00000 to IR 01515 | Input bits are allocated to Input Units or Dedicated I/O Units. The 16 bits in IR 000 are always allocated to the CPU Unit's built-in inputs. Bits in IR 001 to IR 015 are allocated to I/O or Dedicated I/O Units connected to the CPU Unit. |
| | Output area | 256 bits | IR 100 to IR 115 | IR 10000 to IR 11515 | Output bits are allocated to Output Units or Dedicated I/O Units connected to the CPU Unit. |
| | Work areas | 2,528 bits min. | IR 016 to IR 089 | IR 01600 to IR 08915 | Work bits do not have any specific function and they can be freely used within the program. (A minimum 2,528 bits are available as work bits. Most bits in the IR and LR areas can be used as work bits when they are not used for their allocated functions, so the total number of available work bits depends on the configuration of the PLC.) |
| | | | IR 116 to IR 189 | IR 11600 to IR 18915 | |
| | | | IR 216 to IR 219 | IR 21600 to IR 21915 | |
| | | IR 224 to IR 229 | IR 22400 to IR 22915 | | |
| Controller Link status areas | 96 bits | IR 090 to IR 095 | IR 09000 to IR 09515 | Status Area 1: Stores the Controller Link data link status information. | |
| | 96 bits | IR 190 to IR 195 | IR 19000 to IR 19515 | Status Area 2: Stores the Controller Link error and network participation information. | |
| MACRO operand area | Input area | 64 bits | IR 096 to IR 099 | IR 09600 to IR 09915 | Used when the MACRO instruction, MCRO(99), is used. |
| | Output area | 64 bits | IR 196 to IR 199 | IR 19600 to IR 19915 | |
| Inner Board slot 1 area | 256 bits | IR 200 to IR 215 | IR 20000 to IR 21515 | These bits are allocated to the Inner Board mounted in slot 1 of a CQM1H-CPU51/61. High-speed Counter Board:IR 200 to IR 213 Serial Communications Board:IR 200 to IR 207 | |
| Analog settings area | 64 bits | IR 220 to IR 223 | IR 22000 to IR 22315 | Used to store the analog settings when a CQM1H-AVB41 Analog Setting Board is mounted. | |
| High-speed Counter 0 PV | 32 bits | IR 230 to IR 231 | IR 23000 to IR 23115 | Used to store the present values of high-speed counter 0. | |
| Inner Board slot 2 area | 192 bits | IR 232 to IR 243 | IR 23200 to IR 24315 | These bits are allocated to the Inner Board mounted in slot 2. High-speed Counter Board:IR 232 to IR 243 Absolute Encoder Interface Board:IR 232 to IR 239 Pulse I/O Board: IR 232 to IR 239 Analog I/O Board:IR 232 to IR 239 | |
| SR area | 184 bits | SR 244 to SR 255 | SR 24400 to SR 25507 | These bits serve specific functions such as flags and control bits. | |
| HR area | 1,600 bits | HR 00 to HR 99 | HR 0000 to HR 9915 | These bits store data and retain their ON/OFF status when power is turned OFF or when the operating mode is changed. | |
| AR area | 448 bits | AR 00 to AR 27 | AR 0000 to AR 2715 | These bits serve specific functions such as flags and control bits. | |
| TR area | 8 bits | --- | TR 0 to TR 7 | These bits are used to temporarily store ON/OFF status at program branches. | |
| LR area | 1,024 bits | LR 00 to LR 63 | LR 0000 to LR 6315 | Used for 1:1 data link through the RS-232 port or through a Controller Link Unit. | |
| Timer/Counter area | 512 bits | TIM/CNT 000 to TIM/CNT 511 (timer/counter numbers) | | The same numbers are used for both timers and counters. Timer numbers 000 to 015 can be used with TIMH(15) for interrupt-refreshed PVs to ensure proper timing without inaccuracy being caused by the cycle time. | |
| DM area | Read/write | 3,072 words | DM 0000 to DM 3071 | --- | DM area data can be accessed in word units only. Word values are retained when the power is turned OFF. |
| | | 3,072 words | DM 3072 to DM 6143 | --- | Available in CQM1H-CPU51/61 CPU Units only. |
| | Read-only ⁴ | 425 words | DM 6144 to DM 6568 | --- | Cannot be written from the program (only from a Programming Device). DM 6400 to DM 6409: Controller Link parameters DM 6450 to DM 6499: Routing tables DM 6550 to DM 6559: Serial Communications Board Setup |
| | Error history area ⁴ | 31 words | DM 6569 to DM 6599 | --- | Cannot be written from the program (only from a Programming Device). Stores the time of occurrence and error code of errors that occur. |
| | PLC Setup ⁴ | 56 words | DM 6600 to DM 6655 | --- | Cannot be written from the program (only from a Programming Device). Stores various parameters that control PLC operation. |
| EM area | 6,144 words | EM 0000 to EM 6143 | --- | EM area data can be accessed in word units only. Word values are retained when the power is turned OFF or the operating mode is changed. (CQM1H-CPU61 CPU Unit only.) | |

Memory Cassette Specifications

| Item | Details |
|--|--|
| Memory Cassette (EEPROM or flash memory) | Mounted from the front of the CPU Unit and used to store and read the user's program, DM (read-only DM and PLC Setup), and expansion instruction information as one block. It is possible to set the CPU Unit so that data stored in the Memory Cassette (user's program, DM, expansion instruction information) is automatically sent to the CPU Unit (auto-boot) at startup. Transfer and comparison of data between the CPU Unit and Memory Cassette are possible using AR area control bits. |


Other Functions

| Item | Specification | | | |
|--|--|-----------------|----------------|-------------------|
| Macro instructions | Subroutines called by instructions containing arguments. | | | |
| Min. cycle time | 1 to 9,999 ms (Unit: 1 ms) | | | |
| Cycle time monitoring | When the cycle time exceeds 100 ms, the Cycle Time Over Flag turns ON, and operation continues. (A setting can be made in the PLC Setup so that this error is not generated.) When the cycle time exceeds the cycle monitor time, operation is stopped. Cycle monitor time settings: 0 to 990 ms in 10-ms units, 0 to 9,900 ms in 100-ms units, 0 to 99 s in 1-s units. Note: The maximum and current values of the cycle time are stored in the AR area. | | | |
| I/O refreshing | Cyclic refreshing, refreshing by IORF(97), direct output refreshing (set in the PLC Setup), interrupt input refreshing. (The inputs that are refreshed can be set separately for input interrupts, high-speed counter interrupts, and interval timer interrupts in the PLC Setup.) | | | |
| I/O memory status when changing operating mode | Depends on the ON/OFF status of the I/O Hold Bit (SR 25212). | | | |
| Load OFF | All outputs on Output Units can be turned OFF when the CPU Unit is operating in RUN, MONITOR, or PROGRAM mode. (Used for stopping output in emergencies, for debugging, etc.) | | | |
| User-customized DIP switch setting | A pin setting on the DIP switch on the front of the CPU Unit is stored in AR 0712. This setting can be used as an ON/OFF condition (e.g., to switch between trial operation and actual operation). | | | |
| Mode setting at power-up | Possible | | | |
| Debugging | Forced set/reset, differential monitoring, data tracing (scheduled, cyclic, or when instruction is executed). | | | |
| Online editing | User programs can be overwritten in program-block units when the CPU Unit is in MONITOR mode. With the CX-Programmer, more than one program block can be edited at the same time. | | | |
| Program protection | Write-protection of user program and data memory (DM 6144 to DM 6655: read-only DM): Set using pin 1 of the DIP switch. | | | |
| Error check | User-defined errors (i.e., user can define fatal errors and non-fatal errors using the FAL(06) and FALS(07) instructions.) (It is possible to stop operation using FALS(07) for fatal errors.) User-defined error logs can be created in specific bits (logging) when using FAL(06). | | | |
| Error log | Up to 10 errors (including user-defined errors) are stored in the error log. Information includes the error code, error details, and the time the error occurred. | | | |
| Serial communications | Built-in peripheral port: Programming Device (including Programming Console) connections, Host Links, no-protocol communications Built-in RS-232C port: Programming Device (excluding Programming Console) connections, Host Links, no-protocol communications, NT Links (1:1 mode), 1:1 Data Lnks RS-232C port and RS-422A/485 port on Serial Communications Board (sold separately): Programming Device (excluding Programming Console) connections, Host Links, no-protocol communications, NT Links (1:1 mode, 1:N mode), 1:1 Data Lnks, protocol macros | | | |
| Serial communications modes | CQM1H CPU Unit's built-in port | | | |
| | Built-in peripheral port | | | |
| | Built-in RS-232C port | | | |
| | Serial Communications Board ports | | | |
| Programming Console bus | Connects to Programming Console. | YES (pin 7 OFF) | No | No |
| Peripheral bus | Connects to a computer running CX-Programmer or other Support Software. (Automatically used if the network type is set to peripheral bus on the Support Software.) | YES (pin 7 ON) | No | No |
| Host Link (SYSMAC WAY) | Enables reading/writing CPU Unit I/O memory or program using Host Link commands. Computers running Support Software or OMRON Programmable Terminals can also be connected. PLC-initiated communications are possible. | YES (pin 7 ON) | YES | YES |
| No-protocol | Enables sending or receiving up to 256 bytes of data without a protocol or data conversion. A start code, end code, and transmission delay can be set. | YES (pin 7 ON) | YES | YES |
| 1:1 data link | Enables 1:1 data link with a CQM1H, CQM1, CPM-series, C200HX/HG/HE, C200HS, or SRM1 PLC. | No | YES | YES |
| NT links (1:1 and 1:N) | Enables 1:1 or 1:N communications with OMRON Programmable Terminals without additional programming. | No | YES (1:1 only) | YES (1:1 and 1:N) |
| Protocol macros | Enables user-created protocols to communicate with essential any device equipped with a serial communications port (e.g., RS-232C). Standard protocols are also provided. | No | No | YES |
| Clock | Some Memory Cassette are equipped with a clock. (The time of the error will recorded if a clock is used.) | | | |
| Input time constants | Used to set the ON (or OFF) response times for DC Input Units. Settings: 1, 2, 4, 8, 16, 32, 64, and 128 ms. | | | |
| Power OFF detection time | AC power supply: 10 to 25 ms (not fixed), DC power supply: 5 to 25 ms (not fixed) | | | |
| Memory protection | Held Areas: Holding bits, contents of Data Memory and Extended Data Memory, and status of the counter Completion Flags and present values. Note: If the I/O Hold Bit (SR 25212) is turned ON, and the PLC Setup is set to maintain the I/O Hold Bit status when power is turned ON, the contents of the IR area and the LR area will be saved. | | | |
| Commands to a host computer | Host Link command responses can be sent to a computer connected via the Host Link System using the TXD(—) (communications port output) instruction. | | | |
| Remote programming and monitoring | Host Link or peripheral bus communications via a CPU Unit's serial communications port can be used for remote programming and remote monitoring of the PLC through a Controller Link System. (This function is, however, not supported for the serial communications ports on the Serial Communications Board.) | | | |
| Program check | Program is checked at the beginning of operation for items such as no END(01) instruction and instruction errors. CX-Programmer can also check programs. (The level of program checking can be set.) | | | |
| Battery life | 5 years at 25°C (Depends on the ambient temperature and power supply conditions. Min.: 1 yr) Battery replacement must be performed within 5 minutes. | | | |
| Errors from self-diagnostics | CPU (watchdog timer), I/O verification, I/O bus, memory, FALS system (FALS execution or cycle monitor time over), FAL system (FAL execution or PLC Setup error etc.), battery, cycle time over and communications port. | | | |
| Other functions | Storage of number of times power has been interrupted. (Stored in AR area.) | | | |

I/O Functions


Interrupt Input Processing

All CQM1H CPU Units are equipped with four inputs (IR 00000 to IR 00003) that can be used as interrupt inputs. Interrupt processing can be enabled and disabled with the INTERRUPT CONTROL – INT(89) instruction.

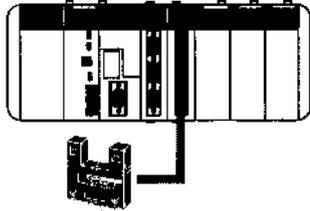

Photomicrosensor etc.

Sample Program

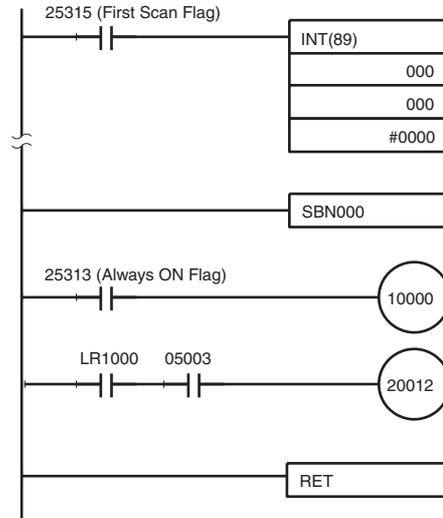

In order for interrupt input processing to be performed, the INTERRUPT CONTROL – INT(89) instruction is set so that interrupt processing is enabled when IR 00000 goes ON.

When the external signal to IR 00000 goes from OFF to ON, program execution is temporarily halted, and processing moves to subroutine 00.


When subroutine 000 (SBN000) is completed, its results are output immediately. The entire interrupt process, from IR 00000 going ON to the refreshing of outputs IR 10000 and IR 20012, provides high-speed I/O response that is not affected by the PLC's cycle time.

Interval Timer Interrupt Processing

The INTERVAL TIMER – STIM(69) instruction is useful for performing repetitive processes, such as output processing, that need to be performed regularly at intervals shorter than the cycle time.

Place an STIM(69) instruction in the program to define a timer that will call and execute a subroutine at regular intervals. Up to 3 interval timers can be used.

Sample Program

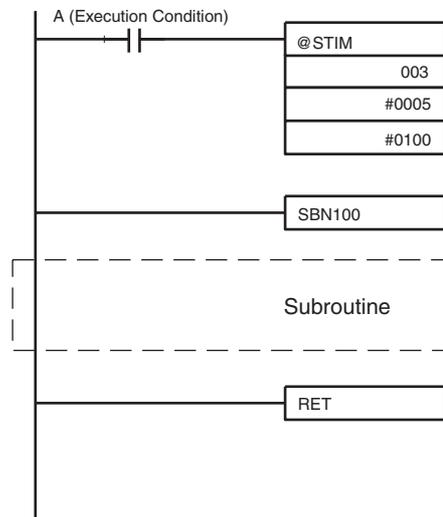


The STIM(69) instruction is used to control an interval timer. In this example, timer 0 is started in repetitive mode.

As long as A (the execution condition) is ON, the main program will be halted and the interrupt routine SBN100 will be executed every 5 ms (i.e., each time the interval timer times out). Main program execution is continued when interrupt routine execution has been completed.

Internal High-speed Counters

Pulses from a rotary encoder can be input directly into 3 of the CPU Unit's inputs (IN04, IN05, and IN06) and used as internal high-speed counter.

Pulses can be counted from 0 to 65535 in the increment mode and -32767 to 32767 in the up/down mode, with a single-phase response speed of 5 KHz and a two-phase response speed of 2.5 KHz.

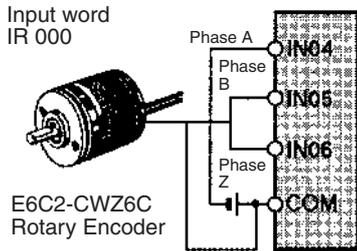



The high-speed counter's input mode is set in the DM Area's PLC Setup.

Pulse Output - PULS(65) and Change Frequency - SPED(64)

These instructions are used to control pulse outputs. They can greatly simplify tasks such as controlling step motors from the CQM1H.

Example

In this example, the speed of a step motor is changed.

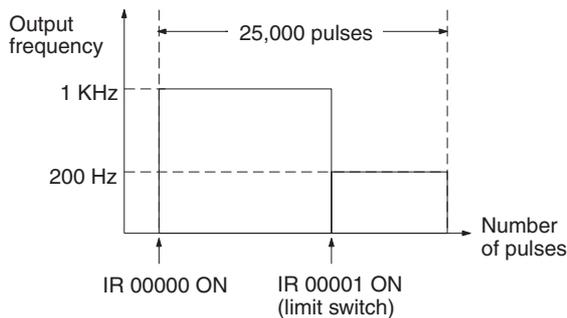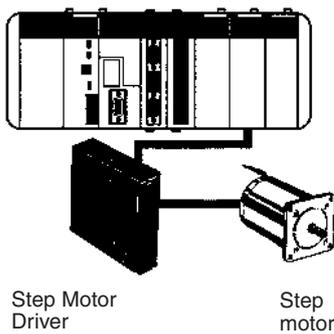

Note: Fuses are not user-serviceable.

Input Modes

| | |
|----------------|---|
| Up/Down mode | Uses phase A and phase B to count up and down. |
| Increment mode | Uses phase A only to count up. |
| Normal mode | Input bit 04 to bit 06 are used as normal inputs. |


Reset Method

There are two ways to reset the counter's PV. The PV can be reset by the software reset alone or by a logical AND between the phase-Z input and the software reset.

Comparison Conditions

| | |
|-----------------|---|
| Target value | Up to 16 target values can be set. The specified subroutine will be executed when the count value reaches a target value. |
| Zone comparison | Up to 8 zones (upper/lower limits) can be set. The specified subroutine will be executed when the count value is within a zone. |

Sample Program

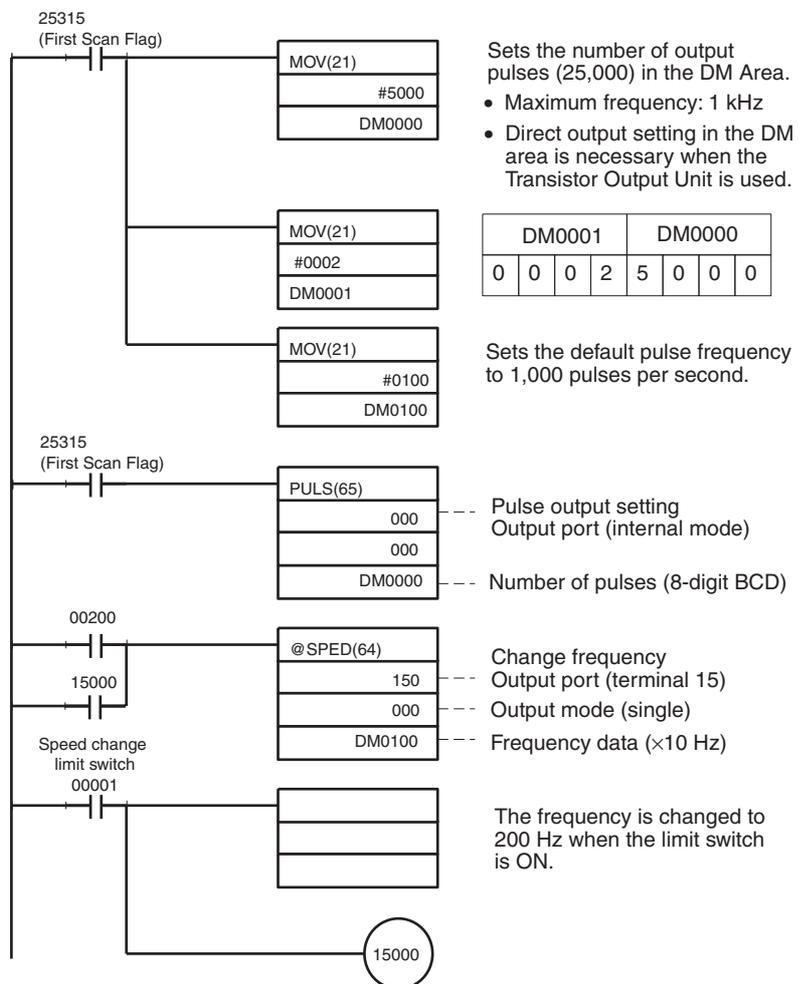

Sets the number of output pulses (25,000) in the DM Area.

- Maximum frequency: 1 kHz
- Direct output setting in the DM area is necessary when the Transistor Output Unit is used.

| DM0001 | | | DM0000 | | | |
|--------|---|---|--------|---|---|---|
| 0 | 0 | 0 | 2 | 5 | 0 | 0 |

Sets the default pulse frequency to 1,000 pulses per second.

Pulse output setting
Output port (internal mode)
Number of pulses (8-digit BCD)

Change frequency
Output port (terminal 15)
Output mode (single)
Frequency data (x10 Hz)

The frequency is changed to 200 Hz when the limit switch is ON.

I/O Memory Allocation

I/O words are allocated to I/O Units according to a fixed location. When the I/O Units and Dedicated I/O Units are connected, the I/O words will be allocated as described next.

Input Word Allocation


IR 000 to IR 015 are allocated as input bits. The first input word (IR 000), however, is allocated to the CPU Unit's 16 built-in input points.

Note: Built-in CPU Unit's inputs are used for interrupt processing and built-in high-speed counter inputs.

Output Word Allocation

IR 100 to IR 115 are allocated as output bits. When Output Units or Dedicated I/O Units are connected, words will be allocated in order starting from IR 100.


| Unit | | I/O word allocation | | |
|---------------------------|---------------------------------|---------------------|-----------------|---|
| | | Input words | Output words | |
| Input Units | | 1 or 2 | --- | Each 8-point or 16-point Input Unit is allocated one input word and each 32-point Input Unit is allocated two input words. Words will be allocated in order starting from IR 001. |
| Output Units | | --- | 1 or 2 | Each 8-point or 16-point Output Unit is allocated one output word and each 32-point Output Unit is allocated two output words. Words will be allocated in order starting from IR 100. |
| Sensor Units | | 1 | --- | Each Sensor Unit is allocated one input word. Bits 00 through 03 are allocated in order from the top to a maximum of four modules. All other bits can be used as work bits in programming. |
| B7A Interface Units | B7A02 | --- | 1 | Depending on the Unit, each B7A Interface Unit is allocated input words and output words. |
| | B7A12 | 1 | --- | |
| | B7A03 | --- | 1 | |
| | B7A13 | 2 | --- | |
| | B7A21 | 1 | 1 | |
| DeviceNet I/O Link Unit | | 1 | 1 | Each DeviceNet I/O Link Unit is allocated one input word and one output word. |
| PROFIBUS-DP I/O Link Unit | | 2, 4, 6 or 8 | 2, 4, 6 or 8 | Number of input words is always equal to the number of output words, and can be set by DIP switches. |
| AS-Interface Master Unit | | 3, 4, 5, 6 or 8 | 3, 4, 5, 6 or 8 | Number of input words is always equal to the number of output words, and depends on the number of connected AS-Interface slaves. |
| CompoBus/S Master Units | IN: 16 points OUT: 16 points | 1 | 1 | Depending on the Unit, each CompoBus/S Master Unit is allocated input words and output words. |
| | IN: 32 points OUT: 32 points | 2 | 2 | |
| | IN: 64 points OUT: 64 points | 4 | 4 | |
| | IN: 64 points OUT: 64 points | 4 | 4 | |
| Analog Input Unit | | 2 or 4 | --- | Each Analog Input Unit can be set to input either 2 or 4 points. If the Unit is set to input 2 points, two input words are allocated. If the Unit is set to input 4 points, four input words are allocated. |
| Analog Output Unit | | --- | 2 | Each Analog Output Unit is allocated two output words. |
| Analog Power Supply Units | | --- | --- | Power Supply Units are not involved directly in I/O operations and are thus not allocated I/O words. |
| Temperature Control Units | 00□/10□ | 2 or 1 | 2 or 1 | Each Temperature Control Unit is allocated two input words and two output words when two loops are used. Only one input word and one output word are allocated when one loop is used. |
| | 20□/30□ | 1 | 1 | One input word and one output word are allocated in the order the Unit is connected. |
| Safety Relay Unit | | 1 | --- | One input word is allocated per Unit in the order the Unit is connected |

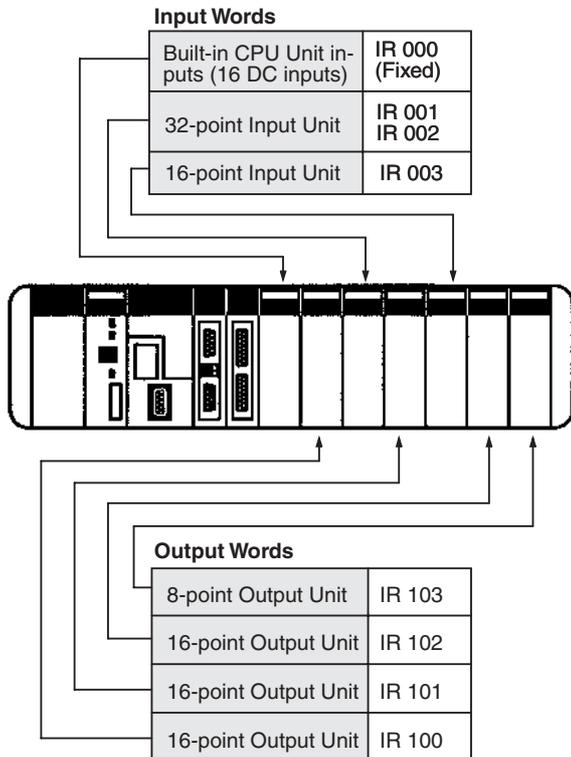


I/O Units

The number of I/O Units that can be connected depends on the CPU Unit being used.

CQM1H-CPU11/CPU21

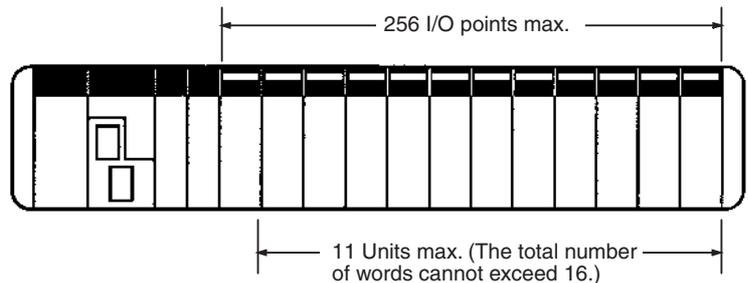

CQM1H-CPU51/CPU61

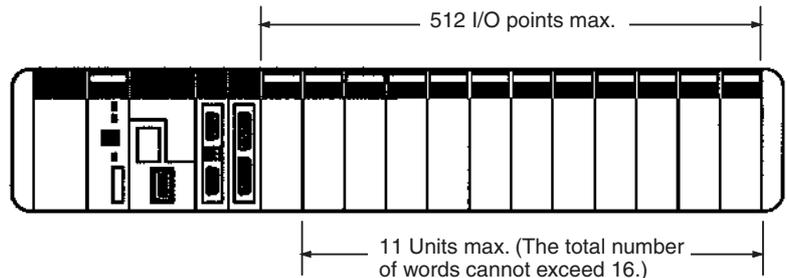

I/O Specifications

Input Specifications

All of the Input Units listed in the following tables have photocoupler isolation and LED input indicators.

CPU Units

| Number of inputs | Input voltage | Input current | Input impedance | Operating voltage | | Response times | | External connection | Inputs/ common | Current consumption (5 V DC) | Weight |
|------------------|------------------|--|---|-------------------|---------------|----------------------|----------------------|---------------------|----------------|------------------------------|--------|
| | | | | ON voltage | OFF voltage | ON delay | OFF delay | | | | |
| 16 pts | 24 V DC +10%/15% | 10 mA for IN04/05 6 mA for the rest (24 V DC) | 2.2 kΩ for IN04/05 3.9 kΩ for the rest | 17.4 V DC min. | 5.0 V DC max. | 8 ms max. (see note) | 8 ms max. (see note) | Terminal block | 16 | --- | --- |

DC Input Units

| Model | Number of inputs | Input voltage | Input current | Input impedance | Operating voltage | | Response times | | External connection | Inputs/ common | Current consumption (5 V DC) | Weight |
|------------|------------------|------------------------|-----------------|-----------------|-------------------|---------------|----------------------|----------------------|---------------------|-----------------------|------------------------------|------------|
| | | | | | ON voltage | OFF voltage | ON delay | OFF delay | | | | |
| CQM1-ID211 | 8 pts | 12 to 24 V DC +10%/15% | 10 mA (24 V DC) | 2.4 kΩ | 10.2 V DC min. | 3.0 V DC max. | 8 ms max. (see note) | 8 ms max. (see note) | Terminal block | 8 independent commons | 50 mA max. | 180 g max. |
| CQM1-ID111 | 16 pts | 12 V DC +10%/15% | 6 mA (12 V DC) | 1.8 kΩ | 8.0 V DC min. | 3.0 V DC max. | 8 ms max. (see note) | 8 ms max. (see note) | | 16 | 85 mA max. | 180 g max. |
| CQM1-ID212 | 16 pts | 24 V DC +10%/15% | 6 mA (24 V DC) | 3.9 kΩ | 14.4 V DC min. | 5.0 V DC max. | 8 ms max. (see note) | 8 ms max. (see note) | | 16 | 85 mA max. | 180 g max. |
| CQM1-ID112 | 32 pts | 12 V DC +10%/15% | 4 mA (12 V DC) | 2.2 kΩ | 8.0 V DC min. | 3.0 V DC max. | 8 ms max. (see note) | 8 ms max. (see note) | Connector | 32 | 170 mA max. | 160 g max. |
| CQM1-ID213 | 32 pts | 24 V DC +10%/15% | 4 mA (24 V DC) | 5.6 kΩ | 14.4 V DC min. | 5.0 V DC max. | 8 ms max. (see note) | 8 ms max. (see note) | | 32 | 170 mA max. | 160 g max. |
| CQM1-ID214 | 32 pts | 24 V DC +10%/15% | 6 mA (24 V DC) | 3.9 kΩ | 15.4 V DC min. | 5.0 V DC max. | 8 ms max. (see note) | 8 ms max. (see note) | | 32 | 170 mA max. | 160 g max. |


AC Input Units

| Model | Number of inputs | Input voltage | Input current | Input impedance | Operating voltage | | Response times | | External connection | Inputs/ common | Current consumption (5 V DC) | Weight |
|------------|------------------|--------------------------|-----------------|--------------------------------|-------------------|--------------|----------------|------------|---------------------|----------------|------------------------------|------------|
| | | | | | ON voltage | OFF voltage | ON delay | OFF delay | | | | |
| CQM1-IA121 | 8 pts | 100 to 120 V AC +10%/15% | 5 mA (100 V AC) | 20 kΩ (50 Hz) 17 kΩ (60 Hz) | 60 V AC min. | 20 V AC max. | 35 ms max. | 55 ms max. | Terminal block | 8 | 50 mA max. | 210 g max. |
| CQM1-IA221 | 8 pts | 200 to 240 V AC +10%/15% | 6 mA (200 V AC) | 38 kΩ (50 Hz) 32 kΩ (60 Hz) | 150 V AC min. | 40 V AC max. | 35 ms max. | 55 ms max. | | 8 | 50 mA max. | 210 g max. |


Note: Selectable from 1 to 128 ms in the PLC Setup.

Circuit Configuration


CQM1H-CPU11/21/51/61

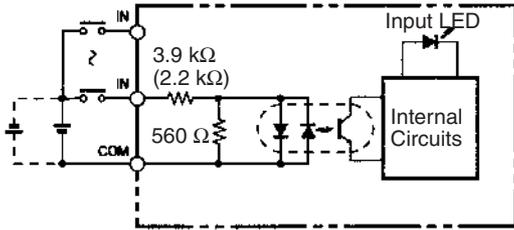

CQM1-ID211

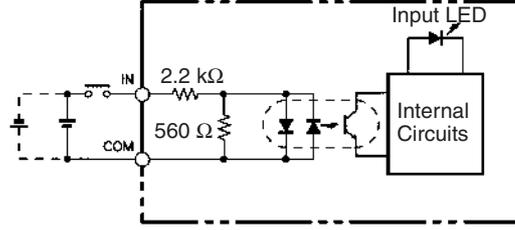


CQM1-ID111/212

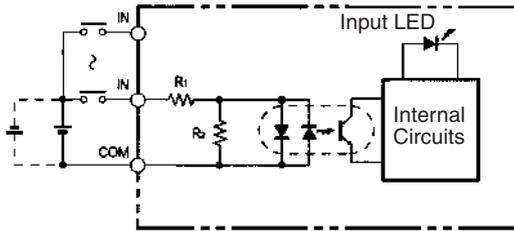


ID111
 $R_1: 1.8 \text{ k}\Omega$
 $R_2: 620 \Omega$
 ID211
 $R_1: 3.9 \text{ k}\Omega$
 $R_2: 560 \Omega$

CQM1-ID112/213/214

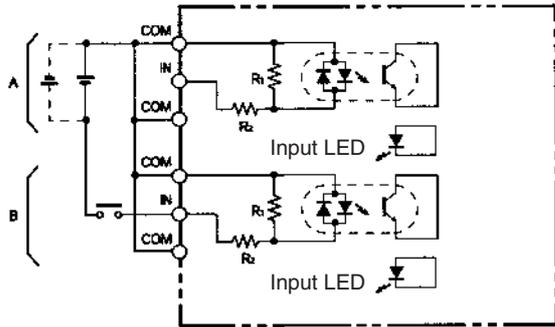


ID112
 $R_1: 750 \Omega$
 $R_2: 2.2 \text{ k}\Omega$
 ID213
 $R_1: 620 \Omega$
 $R_2: 5.6 \text{ k}\Omega$
 ID214
 $R_1: 620 \Omega$
 $R_2: 3.9 \text{ k}\Omega$

CQM1-IA121

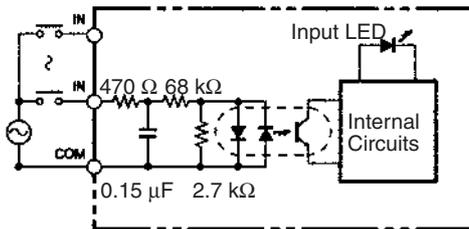

CQM1-IA221

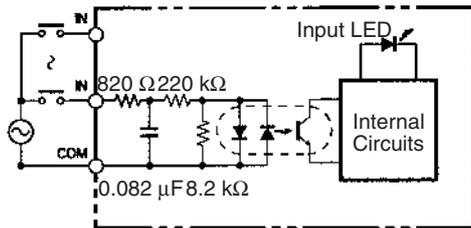

Output Unit Specifications

All of the Output Units have LED output indicators.

Contact Output Units

| Model | Number of outputs | Max. switching capacity | Min. switching capacity | Response times | | External connector | Leakage current | Outputs/ common | Fuses (see note) | External power supply capacity | Internal current consumption (5 V DC) | Weight | | | | |
|------------|-------------------|--|-------------------------|----------------|-----------|--------------------|-----------------|---------------------|------------------|--------------------------------|---------------------------------------|------------|---------------------|-----|-------------|------------|
| | | | | ON delay | OFF delay | | | | | | | | | | | |
| CQM1-OC221 | 8 pts | 2 A, 250 V AC (cosφ= 1) 2 A, 250 V AC (cosφ= 0.4) 2 A, 24 V DC (16 A/Unit) | 10 mA, 5 V DC | 10 ms max. | 5 ms max. | Terminal block | --- | Independent commons | None | --- | 430 mA max. | 200 g max. | | | | |
| CQM1-OC222 | 16 pts | 2 A, 250 V AC (cosφ= 1) 2 A, 250 V AC (cosφ= 0.4) 2 A, 24 V DC (8 A/Unit) | 10 mA, 5 V DC | 10 ms max. | 5 ms max. | | | | | | | | 16 | --- | 850 mA max. | 230 g max. |
| CQM1-OC224 | 8 pts | 2 A, 250 V AC (cosφ= 1) 2 A, 250 V AC (cosφ= 0.4) 2 A, 24 V DC (16 A/Unit) | 10 mA, 5 V DC | 15 ms max. | 5 ms max. | | | | | | | | Independent commons | --- | 440 mA max. | 270 g max. |

Transistor Output Units

| Model | Number of outputs | Max. switching capacity | Min. switching capacity | Response times | | External connector | Leakage current | Outputs/ common | Fuses (see note) | External power supply capacity | Internal current consumption (5 V DC) | Weight |
|----------------------------|-------------------|---|-------------------------|----------------|-------------|--------------------|-----------------|-----------------|-----------------------------------|----------------------------------|---------------------------------------|------------|
| | | | | ON delay | OFF delay | | | | | | | |
| CQM1-OD211 | 8 pts | 2 A at 24 V DC +10%/−15% 5 A/Unit | --- | 0.1 ms max. | 0.3 ms max. | Terminal block | 0.1 mA max. | 8 | 7A (one fuse/ common) | 24 V DC +10%/−15% 15 mA min. | 90 mA max. | 200 g max. |
| CQM1-OD212 | 16 pts | 50 mA at 4.5 V DC to 300 mA at 26.4 V | --- | 0.1 ms max. | 0.4 ms max. | | 0.1 mA max. | 16 | 5A (one fuse/ common) | 5 to 24 V DC ±10% 40 mA min. | 170 mA max. | 180 g max. |
| CQM1-OD213 | 32 pts | 16 mA at 4.5 V DC to 100 mA at 26.4 V | --- | 0.1 ms max. | 0.4 ms max. | Connector | 0.1 mA max. | 32 | 3.5A (one fuse/ common) | 5 to 24 V DC ±10% 110 mA min. | 240 mA max. | 180 g max. |
| CQM1-OD214 (PNP, sourcing) | 16 pts | 50 mA at 4.5 V DC to 300 mA at 26.4 V | --- | 0.1 ms max. | 0.4 ms max. | Terminal block | 0.1 mA max. | 16 | 3.5A (two fuses/ common) | 5 to 24 V DC ±10% 60 mA min. | 170 mA max. | 210 g max. |
| CQM1-OD215 (PNP, sourcing) | 8 pts | 1.0 A at 24 V DC +10%/−15% 4 A/ Unit | --- | 0.2 ms max. | 0.8 ms max. | | 0.1 mA max. | 8 | Short-circuit protection function | 24 V DC +10%/−15% 24 mA min. | 110 mA max. | 240 g max. |
| CQM1-OD216 (PNP, sourcing) | 32 pts | 0.5 A at 24 V DC +10%/−15% 5 A/ Unit | --- | 0.1 ms max. | 0.3 ms max. | Connector | 0.1 mA max. | 32 | 7A (one fuse/ common) | 24 V DC +10%/−15% 160 mA min. | 240 mA max. | 210 g max. |


AC Output Units

| Model | Number of outputs | Max. switching capacity | Min. switching capacity | Response times | | External connector | Leakage current | Outputs/ common | Fuses (see note) | External power supply capacity | Internal current consumption (5 V DC) | Weight |
|------------|-------------------|--------------------------|---|----------------|---|--------------------|---|-----------------------|-----------------------|--------------------------------|---------------------------------------|------------|
| | | | | ON delay | OFF delay | | | | | | | |
| CQM1-OA221 | 8 pts | 0.4 A at 100 to 240 V AC | --- | 6 ms max. | 1/2 cycle + 5 ms max. | Terminal block | 1 mA max. at 100 V AC, 2 mA max. at 200 V AC | 4 each (2 circuits) | 2A (one fuse/ common) | --- | 110 mA max. | 240 g max. |
| CQM1-OA222 | 6 pts | 0.4 A at 100 to 240 V AC | 100 mA at 10 V AC 50 mA at 24 V AC 10 mA at 100 V AC 10 mA at 240 V AC | 1 ms max. | Load frequency of 1/2 cycle + 1 ms max. | | 4 and 2 (2 circuits) | 5A (one fuse/ common) | --- | 250 mA max. | 240 g max. | |


Note: Fuses are not user-serviceable.

Circuit Configuration


CQM1-OC221

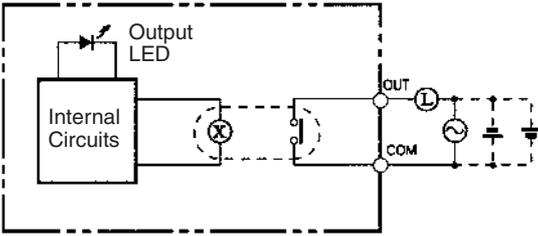


CQM1-OC222

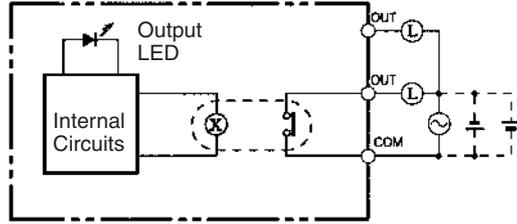


CQM1-OD211

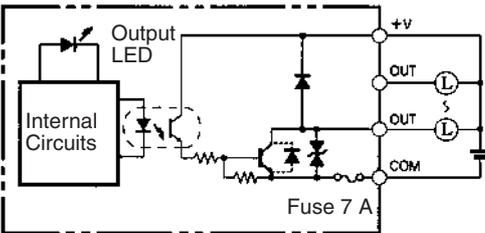


CQM1-OC224

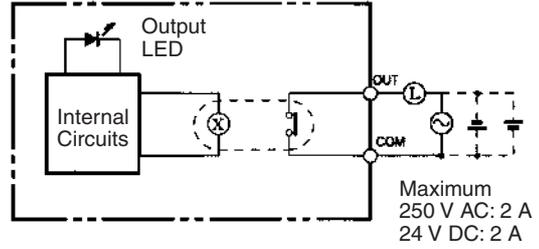


CQM1-OD212

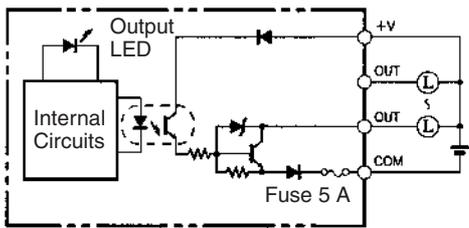


CQM1-OD214

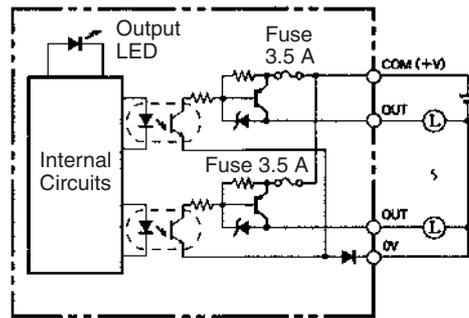


CQM1-OD213

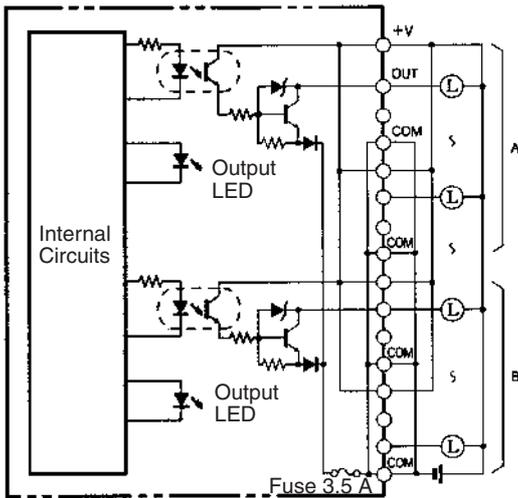


CQM1-OA221

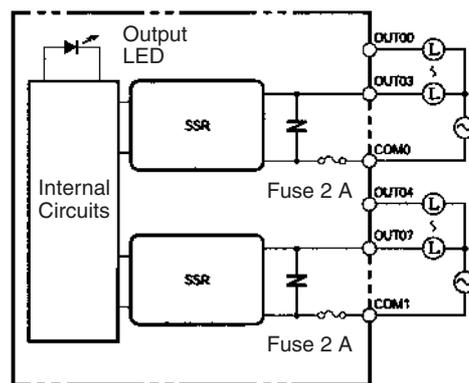


CQM1-OD215

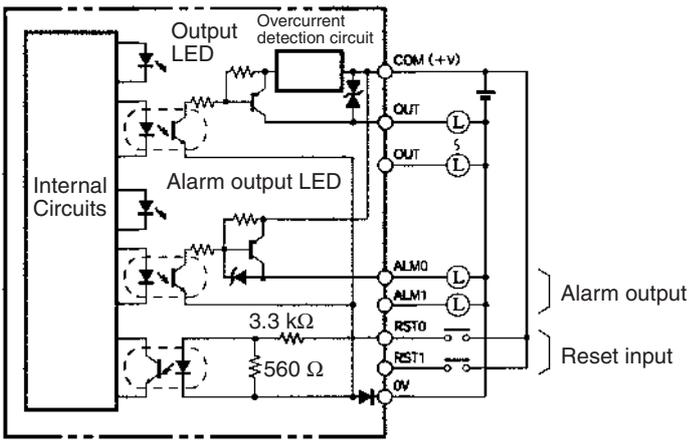

CQM1-OA222

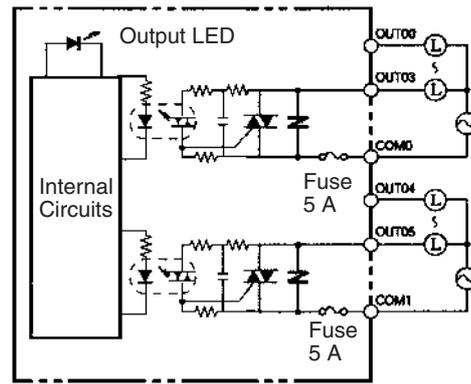


CQM1-OD216

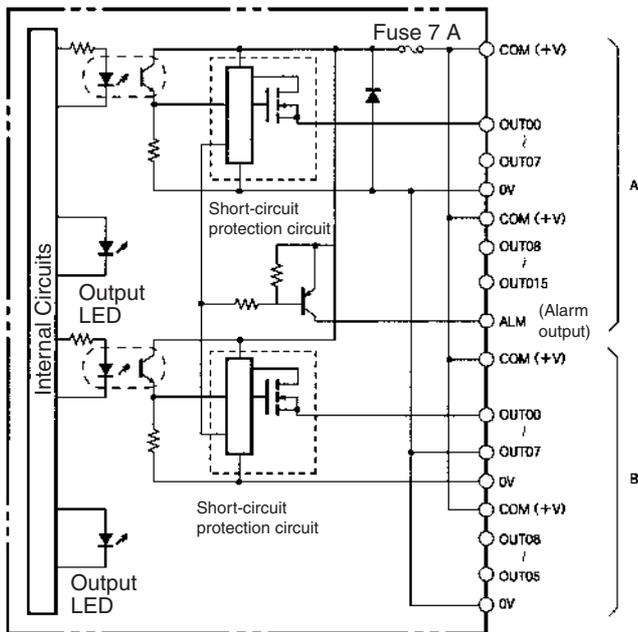


Inner Boards

The six available Inner Boards are shown below. Inner Boards can be mounted in slot 1 or slot 2 of a CQM1H-CPU51 or CQM1H-CPU61 CPU Unit. (Some Inner Boards must be mounted in either slot 1 or slot 2.)


CQM1H-PLB21
Pulse I/O Board

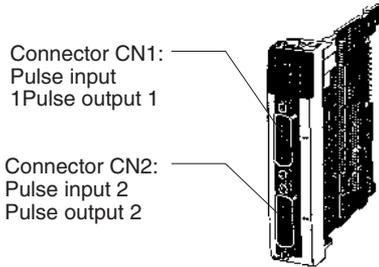


CQM1H-ABB21
Absolute Encoder Interface Board

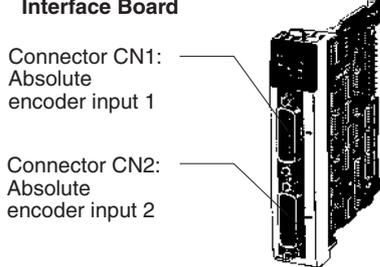


CQM1H-CTB41
High-speed Counter Board

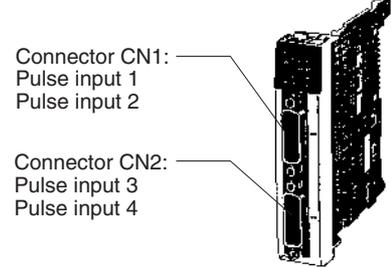


CQM1H-AVB41
Analog Setting Board

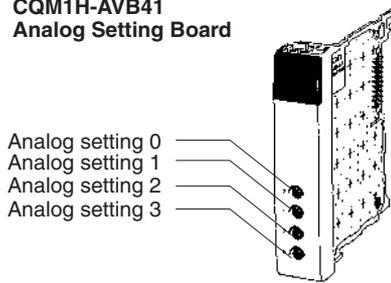

CQM1H-MAB42
Analog I/O Board

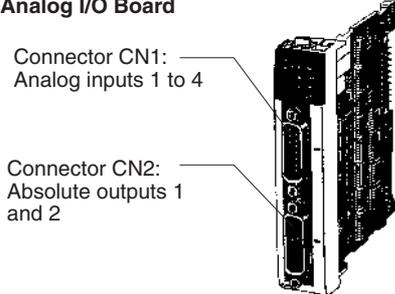


CQM1H-SCB41
Serial Communications Board

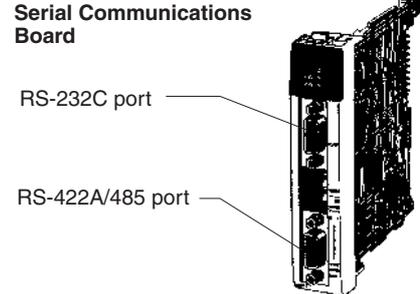

Specifications

| Name | Specifications | Model number | Slot 1 (left slot) | Slot 2 (right slot) | Page |
|----------------------------------|---|--------------|--|---------------------|------|
| Analog Setting Board | Analog settings: 4 points | CQM1H-AVB41 | Yes (Install in either but not in both slots.) | | 135 |
| Analog I/O Board | Four inputs: 0 to 5 V, 0 to 10 V, -10 to +10 V, 0 to 20 mA Two outputs: 0 to 20 mA, -10 to +10 V | CQM1H-MAB42 | No | Yes | 136 |
| High-speed Counter Board | Pulse inputs (high-speed counter): 4 points (50 kHz/500 kHz switchable) External outputs: 4 points | CQM1H-CTB41 | Yes | Yes | 144 |
| Pulse I/O Board | Pulse inputs (high-speed counter): 2 points (single-phase: 50 kHz, phase difference: 25 kHz) Pulse outputs: 2 points (50 kHz) (fixed duty factor and variable duty factor supported) | CQM1H-PLB21 | No | Yes | 146 |
| Absolute Encoder Interface Board | Encoder (binary gray code) inputs: 2 points (4 kHz) | CQM1H-ABB21 | | | 148 |
| Serial Communications Board | One RS-232C port and one RS-422A/485 port | CQM1H-SCB41 | Yes | No | 151 |

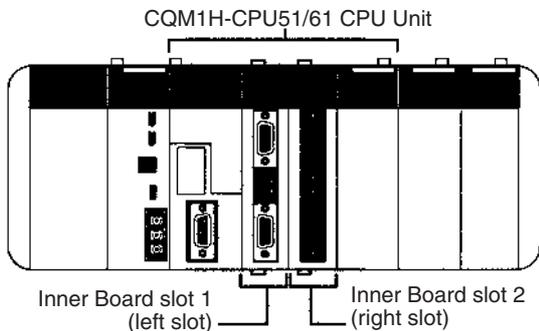

Dedicated I/O Units

Summary of Dedicated I/O Units

| Name | Specifications | Model number | Page | | |
|---------------------------|---|--|------|------------|-----|
| B7A Interface Units | 16 output points | CQM1-B7A02 | 132 | | |
| | 16 input points | CQM1-B7A12 | | | |
| | 32 output points | CQM1-B7A03 | | | |
| | 32 input points | CQM1-B7A13 | | | |
| | 16 input points and 16 output points | CQM1-B7A21 | | | |
| Safety Relay Unit | Emergency stop unit: 2 inputs/2 outputs, 4 general-purpose inputs | CQM1-SF200 | 133 | | |
| Analog Input Unit | 4 analog input points -10 to +10 V, 0 to 10 V, 0 to 5 V, or 0 to 20 mA | CQM1-AD042 | 138 | | |
| Analog Output Unit | 2 analog output points -10 to +10 V or 0 to 20 mA | CQM1-DA021 | 139 | | |
| Temperature Control Units | Thermocouple input (J/K), ON/OFF or advanced PID control, transistor (NPN) output, 2 loops | CQM1-TC001 | 140 | | |
| | Thermocouple input (J/K), ON/OFF or advanced PID control, transistor (PNP) output, 2 loops | CQM1-TC002 | | | |
| | Platinum resistance thermometer input (Pt, JPt), ON/OFF or advanced PID control, transistor (NPN) output, 2 loops | CQM1-TC101 | | | |
| | Platinum resistance thermometer input (Pt, JPt), ON/OFF or advanced PID control, transistor (PNP) output, 2 loops | CQM1-TC102 | | | |
| | Thermocouple input (K, J, L, T, R, S, B), ON/OFF or advanced PID control, manual operation, transistor (NPN) output, 4 loops | CQM1-TC201 | | | |
| | Thermocouple input (K, J, L, T, R, S, B), ON/OFF or advanced PID control, manual operation, transistor (PNP) output, 4 loops | CQM1-TC202 | | | |
| | Thermocouple input (K, J, L, T, R, S, B), heater burnout alarm, ON/OFF or advanced PID control, manual operation, transistor (NPN) output, 2 loops | CQM1-TC203 | | | |
| | Thermocouple input (K, J, L, T, R, S, B), heater burnout alarm, ON/OFF or advanced PID control, manual operation, transistor (PNP) output, 2 loops | CQM1-TC204 | | | |
| | Platinum resistance thermometer input (Pt100, JPt100), manual operation, ON/OFF or advanced PID control, transistor (NPN) output, 4 loops | CQM1-TC301 | | | |
| | Platinum resistance thermometer input (Pt100, JPt100), manual operation, ON/OFF or advanced PID control, transistor (PNP) output, 4 loops | CQM1-TC302 | | | |
| | Platinum resistance thermometer input (Pt100, JPt100), heater burnout alarm, manual operation, ON/OFF or advanced PID control, transistor (NPN) output, 2 loops | CQM1-TC303 | | | |
| | Platinum resistance thermometer input (Pt100, JPt100), heater burnout alarm, manual operation, ON/OFF or advanced PID control, transistor (PNP) output, 2 loops | CQM1-TC304 | | | |
| | Linear Sensor Interface Units | Measure voltage or current inputs from linear sensors and convert the measurements to numeric data for comparative decision processing. Standard type | | CQM1-LSE01 | 142 |
| | | With monitor output (-9.999 V to 9.999 V). | | CQM1-LSE02 | |

CQM1-B7A□□

B7A I/O Interface Unit

A B7A Interface Unit can connect to I/O devices located up to 500 m away using a single cable. Units are available with a wide range of I/O capacities to help reduce wiring in just about any application. Connect to PLCs for simple digital communications, connect to a control panel, or connect to a robot. Whatever you connect to, you'll achieve more efficient wiring by reducing the number of connection cables required.



Specifications

General

| Item | Specification |
|-----------------------|---|
| I/O points | CQM1- B7A21:16 input points (see note 1), 16 output points B7A13:32 input points (see note 2) B7A03:32 output points B7A12:16 input points (see note 1) B7A02:16 output points |
| I/O word allocation | CQM1- B7A21:1 word each for input and output (2 words in total) B7A13:2 words for input B7A03:2 words for output B7A12:1 word for input B7A02:1 word for output |
| Communication method | Unidirectional, time-shared multiplex |
| Transmission distance | STANDARD:500 m max. (see note 3) RAPID:100 m max. (see note 3) |
| I/O delay | STANDARD:19.2 ms (rated delay), 31 ms max. RAPID:3 ms (rated delay), 5 ms max. (STANDARD or RAPID set via switch.) |
| Power consumption | 100 mA at 5 V DC |
| External power supply | 12 to 24 V DC ±10%, 0.11 A min. (excluding the power required by the B7A Link Terminals) |
| Weight | 200 g max. |
| Dimensions | 32 x 110 x 107 mm (W x H x D) |

- Note:**
1. Input mode setting allows selection between 16-point input and 15-point+1 error input.
 2. Input mode setting allows selection between 32-point input and 30-point+2 error input.
 3. The transmission distance depends on the power supply wiring methods.

B7A Link Terminals

Input Units

| Name | Model | Transmission delay time |
|-----------------------|-----------|-------------------------|
| Screw terminal models | B7A-T6□1 | STANDARD (19.2 ms) |
| | B7AS-T6□1 | |
| | B7A-T6□6 | RAPID (3 ms) |
| | B7AS-T6□6 | |
| Module models | B7A-T6D2 | STANDARD (19.2 ms) |
| | B7A-T6D7 | RAPID (3 ms) |
| PLC connector models | B7A-T□E3 | STANDARD (19.2 ms) |
| | B7A-T□E8 | RAPID (3 ms) |

Output Units

| Name | Model | Transmission delay time |
|----------------------|----------------|-------------------------|
| Screw terminal model | B7A-R6□□1 | STANDARD (19.2 ms) |
| | B7AS-R6□□1 | |
| | B7A-R6□□6 | RAPID (3 ms) |
| | B7AS-R6□□6 | |
| | G70D-R6R□1-B7A | |
| G70D-R6M□1-B7A | | |
| Module model | B7A-R6A52 | STANDARD (19.2 ms) |
| | B7A-R6A57 | RAPID (3 ms) |
| PLC connector models | B7A-R□A□3 | STANDARD (19.2 ms) |
| | B7A-R□A□8 | RAPID (3 ms) |

- Note:** Combine B7A Interface Units and B7A Link Terminals with equal transmission delay times. Do not connect B7A Link Terminals with 10 points and mixed I/O points.

I/O Unit and 32-point Input Unit

| Name | | Model | Transmission delay time |
|----------------------|----------------------------|-----------|--|
| Screw terminal model | I/O | B7AM-6BS | STANDARD (19.2 ms)/ RAPID (3 ms) (switchable) |
| | 32 inputs (16 pts/circuit) | B7AS-T3BS | |

CQM1-SF200

Safety Relay Unit

- Reduces wiring effort and installation space for safety circuits.
- Monitors the following four statuses of the safety circuit
 1. Safety Circuit Output Status
Monitors if the safety circuit is operating and producing outputs.
 2. Safety Circuit Power Status
Monitors the status of the power supply to the safety circuit.
 3. K1 Relay Operating Status
 4. K2 Relay Operating Status
Monitors the status of the internal relays that form the safety circuit. This helps troubleshooting safety circuit problems.
- General-purpose Inputs
In addition to the safety circuit, a general-purpose input section (4 inputs and 1 common) is provide, which can be used for general controls.



Specifications

General

| Item | Specifications | |
|---------------------------------------|----------------|---|
| Contact resistance (See note 1.) | 100 mΩ | |
| Operating time (See note 2.) | 300 ms max. | |
| Response time (See notes 2 and 3.) | 10 ms max. | |
| Durability | Mechanical | 5 million operations min. (switching frequency: 7,200 times/hour) |
| | Electrical | 100,000 operations min. (rated load, switching frequency: 1,800 times/hour) |
| Error rate (P level: reference value) | 1 mA at 5 V DC | |
| Weight | 260 g max. | |

- Note:**
1. Measurement conditions: 1 A at 5 V DC voltage drop method
 2. Bounce time is not included.
 3. The response time is from when the input is turned OFF to when the main contact turns OFF.

Ratings (Safety Circuit)

Power Supply Section

| Item | Specifications |
|---------------------------------------|-----------------------------|
| Supply voltage | 24 V DC |
| Permissible voltage fluctuation range | -15%/+10% of supply voltage |
| Power consumption | 24 V DC: 1.7 W max. |

Input Section

| Item | Specifications |
|---------------|----------------|
| Input current | 75 mA max. |


Switching Section

| Item | Specifications |
|-------------------------|-------------------------|
| Load | Resistive load (cos=φ1) |
| Rated load | 5 A at 250 V AC |
| Rated switching current | 5 A |

Ratings (General-purpose Input)

| Item | Specifications |
|--|---|
| Rated input voltage | 24 V DC -15%/+10% |
| Input impedance | 4.0 kΩ |
| Input current | 6 mA typical (24 V DC) |
| ON voltage/ON current | 14.4 V DC min./3 mA min. |
| OFF voltage/OFF current | 5 V DC max./1 mA max. |
| ON/OFF response time | 8 ms max. (selectable from 1 to 128 ms using System Setup.) |
| Number of circuits | 4 inputs and 1 common |
| Number of points that turn ON simultaneously | 100% simultaneously ON |
| Internal current consumption | 50 mA max. |


Circuit Configuration (Inputs)

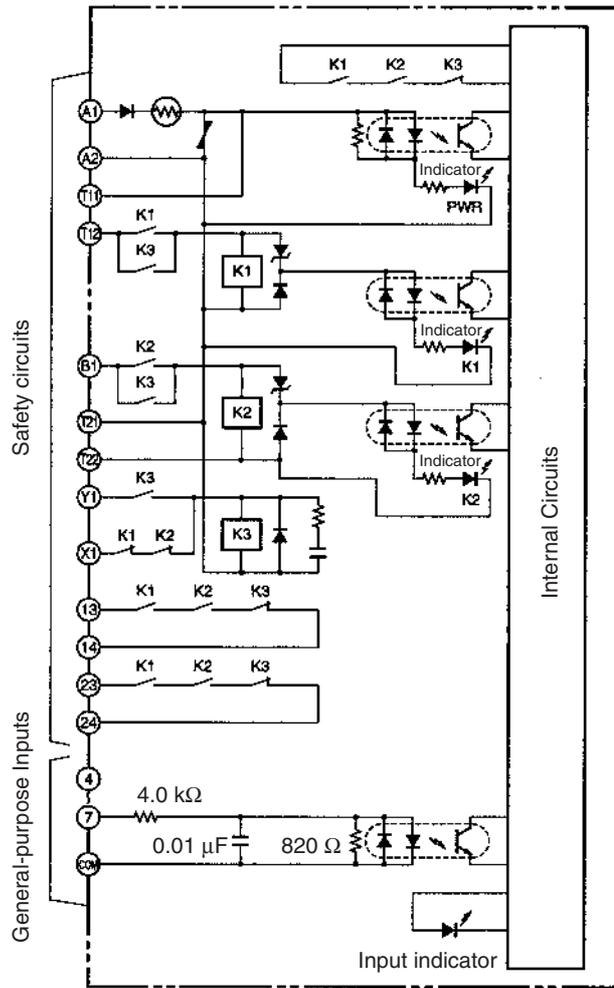

CQM1H-AVB41

Analog Setting Board

- The Analog Setting Board is an Inner Board that provides four variable resistor adjustments. The settings on the four adjustments are stored in the analog setting words.
- By using the Analog Setting Board, an operator can, for example, set the value of a timer instruction using an analog adjustment, and thereby slightly speed up or slow down the speed or timing of a conveyor belt simply by turning an adjustment screw with a screwdriver, removing the need for a Programming Device.

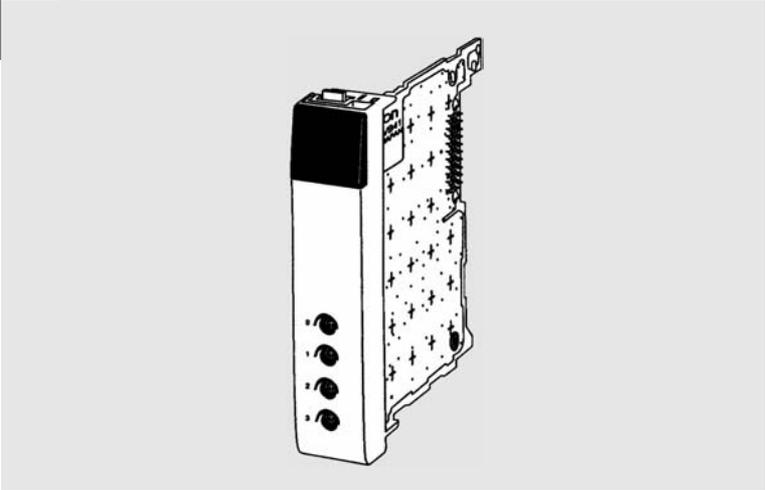

Using the Analog Timer

The following example shows the 4-digit BCD setting (0000 to 0200) stored in IR 220 to IR 223 being used as a timer setting.



The setting of TIM 000 is set externally in IR 220. (TIM 000 is executed using the SV set with analog adjustment 0.)

Specifications


General

| Item | Specifications |
|---|---|
| Name | Analog Setting Board |
| Model number | CQM1H-AVB41 |
| Applicable CPU Units | CQM1H-CPU51/61 |
| Unit classification | CQM1H-series Inner Board |
| Mounting locations and number of Boards | 1 Board can be mounted in either slot 1 or slot 2. Note: Two Analog Setting Boards cannot be used at the same time. |
| Settings | 4 analog (variable resistor) adjustment screws on front panel (Adjustable using Phillips screwdriver.) The settings of adjustments 0 to 3 are stored as 4-digit BCD values between 0000 and 0200 in IR 220 to IR 223 respectively. |
| Current consumption (Supplied from Power Supply Unit) | 5 V DC, 10 mA max. |
| Dimensions | 25 × 110 × 107 mm (W × H × D) |
| Weight | 60 g max. |


CQM1H-MAB42

Analog I/O Board

- The Analog I/O Board is an Inner Board with four analog inputs and two analog outputs.
- The signal ranges that can be used for each of the four analog inputs are -10 to $+10$ V, 0 to 10 V, 0 to 5 V, and 0 to 20 mA. Each input's signal range can be set independently.
- The signal ranges that can be used for each of the two analog output points are -10 to $+10$ V and 0 to 20 mA. Each output's signal range can be set independently.

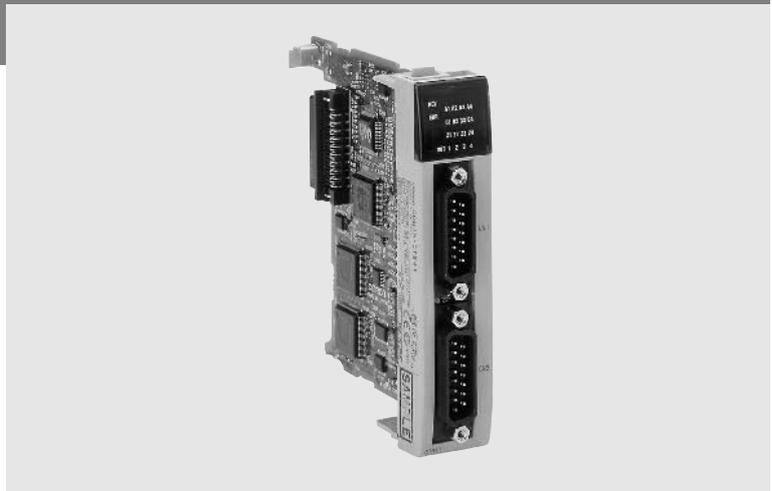

Example System Configuration

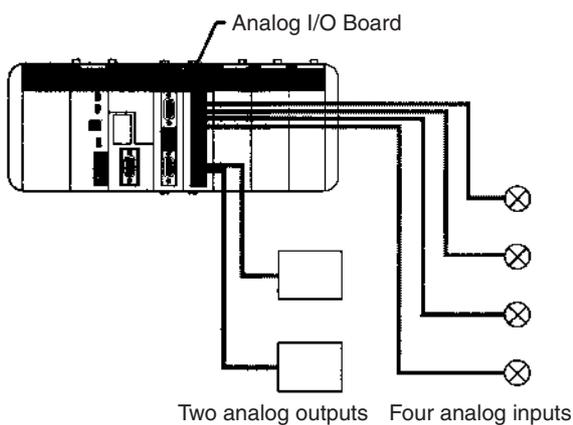

Specifications

General

| Item | Specifications |
|---|--|
| Name | Analog I/O Board |
| Model number | CQM1H-MAB42 |
| Applicable CPU Units | CQM1H-CPU51/61 |
| Unit classification | CQM1H-series Inner Board |
| Mounting locations and number of Boards | 1 Board in Inner Board slot 2 (right slot) |
| Analog inputs | 4 inputs |
| Analog outputs | 2 outputs |
| Current consumption (Supplied from Power Supply Unit) | 5 V DC, 400 mA max. |
| Dimensions | 25 × 110 × 107 mm (W × H × D) |
| Weight | 100 g max. |
| Standard accessories | Plugs:XM2D-1501 (OMRON) × 2 Hoods:XM2S-1511 (OMRON) × 2 |

Analog Inputs

| Item | Specifications | |
|----------------------------------|---|--|
| Input signals | Voltage inputs | Current inputs |
| Number of analog inputs | 4 inputs | |
| Input signal ranges ¹ | -10 to 10 V 0 to 10 V 0 to 5 V | 0 to 20 mA |
| A/D conversion time ² | 1.7 ms max./point | |
| Resolution | 1/4,096 | |
| A/D conversion output data | 12-bit binary data -10 to +10 V: F800 to 07FF Hex 0 to 10 V, 0 to 5 V: 0000 to 0FFF Hex | 12-bit binary data 0 to 20 mA: 0000 to 0FFF Hex |
| External input impedance | 1 M Ω typical | 250 Ω typical |
| Absolute maximum rated input | \pm 15 V | \pm 30 mA |
| Overall precision ³ | 23 \pm 2°C | \pm 0.5% of FS |
| | 0 to 55°C | \pm 1.0% of FS |

- Note:**
1. Separate input signal ranges can be set for each input.
 2. The A/D conversion time is the time taken for an analog signal to be stored in memory as digital data. At least one cycle is required to transfer the data to the CPU Unit.
 3. The overall precision is the precision with respect to full scale.
 4. The CQM1H-MAB42 Analog I/O Board, unlike the CQM1-AD041, does not have a hardware average processing function. If averaging of data is required, use the CPU Unit's data averaging instruction (AVG).

Analog Outputs

| Item | Specifications | |
|---|--|--|
| Output signals | Voltage outputs | Current outputs |
| Number of analog outputs | 2 outputs | |
| Output signal ranges ¹ | -10 to 10 V | 0 to 20 mA |
| D/A conversion time ² | 1.7 ms max./2 points | |
| Resolution | 1/4,096 | 1/2,048 |
| Set output data | 12-bit binary data -10 to +10 V: F800 to 07FF Hex | 11-bit binary data 0 to 20 mA: 0000 to 07FF Hex |
| Allowable external output load resistance | 2 K Ω min. | 350 Ω max. |
| Overall precision ³ | 23 \pm 2°C | \pm 0.5% of FS |
| | 0 to 55°C | \pm 1.0% of FS |

- Note:**
1. Separate output signal ranges can be set for each output.
 2. The D/A conversion time is the time taken for the output data set in memory to be converted to analog signals and output. At least one cycle is required to transfer the data in the CPU Unit to the Analog I/O Board.
 3. The overall precision is the precision with respect to full scale.

CQM1-AD041

Analog Input Unit

The CQM1-AD042 Analog Input Unit retrieves four analog signals from sensors or measuring equipment.




Specifications

General

| Item | Specification | |
|------------------------------|------------------------------------|---------------------------------------|
| No. of analog input points | 4 or 2 (selected with DIP switch) | |
| Input signal range | Voltage input | -10 to +10 V 0 to 10 V 0 to 5 V |
| | Current input | 0 to 20 mA |
| Input impedance | Voltage input | 1 MΩ min. |
| | Current input | 250 Ω |
| Resolution | 1/4000 | |
| Accuracy | at 25°C: ±0.5% 0 to 55°C: ±1.0% | |
| Conversion speed | 1.2 ms/1 pt. | |
| Internal current consumption | 170 mA max. at 5 V DC | |

System Configuration

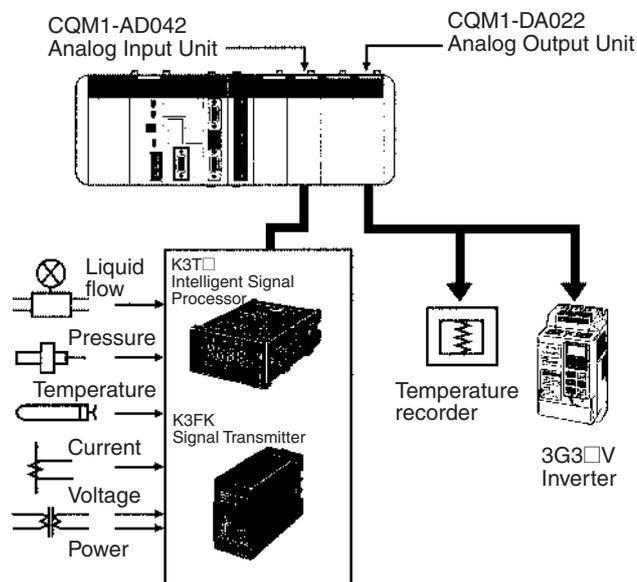

CQM1-DA021

Analog Output Unit

A single Analog Output Unit makes two-point digital-to-analog conversion possible at a speed of 0.5 ms/two points.




Specifications

General

| Item | Specification | |
|---|--------------------------------------|--|
| No. of analog output points | 2 | |
| Output signal range | Voltage output | -10 to 10 V |
| | Current output | 0 to 20 mA |
| External output permissible load resistance | Voltage output | 2 kΩ min. |
| | Current output | 350 Ω max. (including wiring impedance) |
| External output impedance | Voltage output | 0.5 Ω max. |
| Resolution | Voltage output | 1/4096 |
| | Current output | 1/2048 |
| Accuracy | at 25 °C: ±0.5% 0 to 55 °C: ±1.0% | |
| Conversion speed | 0.5 ms/2 points | |
| Internal current consumption | 340 mA at 5 V DC | |

System Configuration

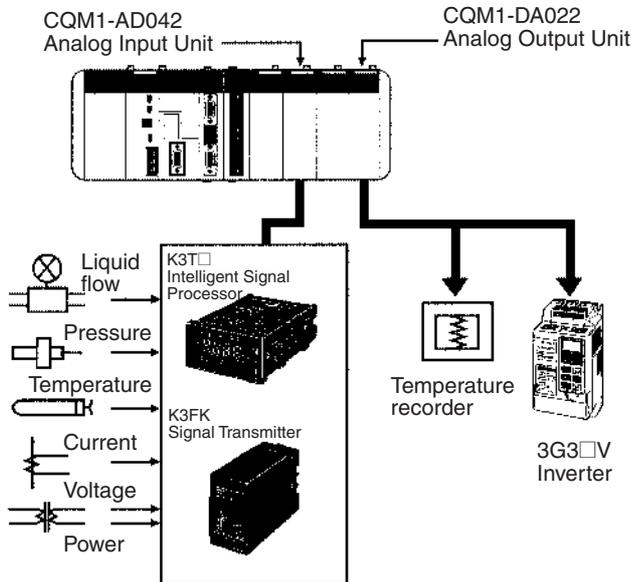

CQM1-TC□□

Temperature Control Units



CQM1-TC00□/TC20□: Thermocouple Inputs

CQM1-TC10□/TC30□: Platinum Resistance Thermometer Inputs

- Temperature Control Units are available for either 4-loop temperature control or 2-loop temperature control, and Units with 2-loop temperature control provide a heater burnout alarm.
- Parameters can be set and data read for these Temperature Control Units by transferring commands. Therefore, only one word each is allocated to the Temperature Control Unit for inputs and outputs, enabling high-density temperature controls. Commands can be easily transferred using the TRANSFER I/O COMMAND instruction (see note 1) that was added to the CQM1H CPU Units.
- The PID with advanced feed-forward circuitry (2 degrees of freedom) assures stable temperature control. The Units can also be set to ON/OFF control.

Note: Parameters can be set and data read for the CQM1-TC20□ and TC30□ using the new IOTC(→) instruction. The IOTC instruction is supported by the following combination of CPU Unit and Support Software: CX-Programmer version 2.0 or later and a CQM1H CPU Unit with a lot number of 0160 or later.

Specifications

General

| Item | | Thermocouple input CQM1-TC00□ | Platinum resistance thermometer input CQM1-TC10□ | Thermocouple input CQM1-TC20□ | Platinum resistance thermometer input CQM1-TC30□ |
|------------------------------|------------------------------------|--|--|--|---|
| Input | Input sensors and set point ranges | K: -200 to 1,300 °C (-300 to 2,300 °F) J: -100 to 850 °C (-100 to 1,500 °F) | JPt: -99.9 to 450.0 °C (-99.9 to 800.0 °F) Pt: -99.9 to 450.0 °C (-99.9 to 800.0 °F) | K, J, T, L, R, S, B (See the following table for temperature ranges.) | Pt100, JPt100 (See the following table for temperature ranges.) |
| | Number of control loops | Two (either 1 or 2 loops can be used) | | 4 loops or 2 loops with heater burnout alarm | |
| Control mode | | ON/OFF or advanced PID control (2 degrees of freedom) | | ON/OFF control, advanced PID control (2 degrees of freedom), or manual operation | |
| Setting and display accuracy | | °C Ranges (Set point ±1% or ±3 °C, whichever is larger) ±1 digit max. °F Ranges (Set point ±1% or ±6 °F, whichever is larger) ±1 digit max. | °C Ranges (Set point ±1% or ±2 °C, whichever is larger) ±1 digit max. °F Ranges (Set point ±1% or ±4 °F, whichever is larger) ±1 digit max. | °C Ranges (Set point ±0.3% or ±1 °C, whichever is larger) ±1 digit max. °F Ranges (Set point ±0.3% or ±2 °F, whichever is larger) ±1 digit max. | 0.1 °C Ranges (Set point ±0.3% or ±0.8 °C, whichever is larger) ±1 digit max. 0.1 °F Ranges (Set point ±0.3% or ±1.6 °F, whichever is larger) ±1 digit max. (See note 1.) 0.01 °C Ranges (Set point ±0.3% or ±0.5 °C, whichever is larger) ±1 digit max. |
| Temperature hysteresis | | 0.8 °C/°F | | 0.1 to 999.9 °C/°F (0.1°C/°F unit) | |
| Proportional band | | 40.0 °C/°F | | 0.1 to 999.9 °C/°F (0.1°C/°F unit) | |
| Derivative time | | 240 s | | 0 to 3,999 s (1 s unit) | |
| Integral time | | 40 s | | 0 to 3,999 s (1 s unit) | |
| Manual output | | --- | | 0.0% to 100.0% (0.1% unit) | |
| Control period | | 20 s | | 1 to 99 s (1 s unit) | |
| Input shift range | | --- | | -99.9 to 999.9 °C/°F (0.1°C/°F unit) | 0.1 °C Ranges -99.9 to 999.9 °C/°F (0.1°C/°F unit) 0.01 °C Ranges -9.99 to 99.99 °C/°F (0.01°C/°F unit) |
| Sampling period | | 1 s | | 0.5 s | |

| Item | | Thermocouple input CQM1-TC00□ | Platinum resistance thermometer input CQM1-TC10□ | Thermocouple input CQM1-TC20□ | Platinum resistance thermometer input CQM1-TC30□ |
|------------------------------|-----------------------------------|--|---|--|---|
| Output | Output refresh period | 1 s | | 0.5 s | |
| | Output form | NPN or PNP outputs (with short-circuit protection) | | NPN or PNP outputs (with short-circuit protection) | |
| | Maximum switching capacity | 100 mA, 24 V DC ^{+10%} / _{-15%} | | 100 mA, 24 V DC ^{+10%} / _{-15%} | |
| | Leakage current | 0.3 mA max. | | 0.1 mA max. | |
| | Residual voltage | 3.0 V max. | | 0.8 V max. | |
| External supply voltage | | 15 mA min., 24 V DC ^{+10%} / _{-15%} | | 30 mA min., 24 V DC ^{+10%} / _{-15%} | |
| Internal current consumption | | 220 mA max. at 5 V DC | | 190 mA max. at 5 V DC | |
| Heater burnout alarm | Maximum heater current | --- | | 50 A, single-phase AC | |
| | Input current monitoring accuracy | --- | | ±5 % FS ±1 digit | |
| | Heater burnout alarm setting | --- | | 0.1 to 49.9 A (0.1 A unit) (See note 1.) | |
| | Minimum ON time for detection | --- | | 200 ms (See note 2.) | |

Note: 1. Heater burnout detection will be disabled if the alarm is set to 0.0 A. The heater burnout alarm output will turn ON if the alarm is set to 50.0 A.

2. If the control output is ON for less than 200 ms, heater burnout will not be detected and the heater current will not be measured.

Temperature Ranges


Units for Thermocouples

| Input type | Code No. | °C | °F |
|------------|----------|-----------------|-----------------|
| K | 0 | -200 to 1300 | -300 to 2300 |
| K | 1 | 0.0 to 500.0 | 0.0 to 900.0 |
| J | 2 | -100 to 850 | -100 to 1500 |
| J | 3 | 0.0 to 400.0 | 0.0 to 750.0 |
| T | 4 | -200.0 to 400.0 | -300.0 to 700.0 |
| L | 5 | -100 to 850 | -100 to 1500 |
| L | 6 | 0.0 to 400.0 | 0.0 to 750.0 |
| R | 7 | 0 to 1700 | 0 to 3000 |
| S | 8 | 0 to 1700 | 0 to 3000 |
| B | 9 | 100 to 1800 | 300 to 3200 |

Units for Platinum Resistance Thermometers


| Input type | Code No. | °C | °F |
|------------|----------|------------------|------------------|
| Pt100 | 0 | -200.0 to 650.0 | -300.0 to 1200.0 |
| JPt100 | 1 | -200.0 to 650.0 | -300.0 to 1200.0 |
| Pt100 | 2 | -20.00 to 250.00 | Do not set. |
| JPt100 | 3 | -20.00 to 250.00 | Do not set. |

Example System Configuration

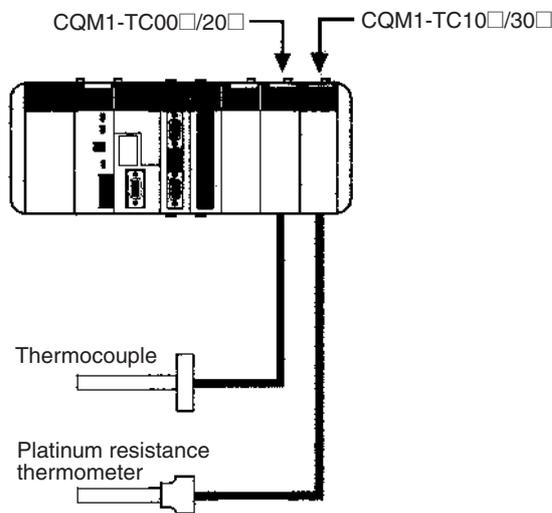


Circuit Configuration (Outputs)

CQM1-TC□01/TC□03: Sinking Outputs (NPN)

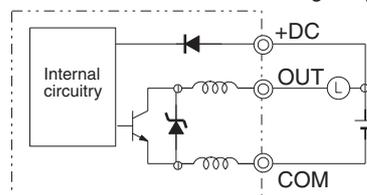

CQM1-TC□02/TC□04: Sourcing Outputs (PNP)

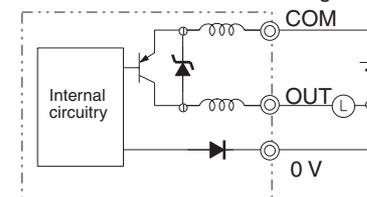

Current Detector Ratings

| Item | E54-CT1 | E54-CT3 |
|-----------------------------------|--------------------------------------|---------------------------|
| Continuous maximum heater current | 50 A | |
| Range for accurate measurement | 0 to 30 A | 0 to 50 A |
| Withstand voltage | 1,000 V AC | |
| Shock resistance | 50 Hz (Approx. 98 m/s ²) | |
| Hole diameter | 5.8 mm | 12.0 mm |
| Weight | Approx. 11.5 g | Approx. 50 g |
| Accessories | None | Contactors: 2 Plugs: 2 |

CQM1-LSE0□

Linear Sensor Interface Units

The Linear Sensor Interface Units measure voltage or current inputs from linear sensors quickly and accurately and convert the measurements to numeric data for comparative decision processing. You can also sync internal processing using external timing signals.

- A high-speed sampling cycle of 1 ms can be combined with high-speed external timing at 0.3 ms to easily detect high-speed changes in analog signals.
- Scaling and comparative decision processing reduces the burden on the CQM1H's CPU Unit, achieving faster processing both in the Unit and for the PLC all around.
- A forced-zero function lets you easily change reference points for different work pieces.
- The monitor output allows a specified voltage to be output from the ladder-diagram program to provide analog output capability (CQM1-LSE02 only).




Specifications

General

| Item | | CQM1-LSE01 | CQM1-LSE02 | |
|------------------------------|--|--|--|--|
| Input | No. of analog input points | 1 | | |
| | Input signal range | Voltage input | -9.999 to 9.999 V, -5 to 5 V, 1 to 5 V | |
| | | Current input | 4 to 20 mA | |
| | Input impedance | Voltage input | 1 M Ω min. | |
| | | Current input | 10 Ω | |
| Linearity | $\pm 0.1\%$ FS ± 1 digit max. with input sampling speed set to slow $\pm 0.5\%$ FS ± 1 digit max. with input sampling speed set to fast | | | |
| PLC output code | | Signed binary (-9999 to 9999 V) | | |
| Sampling time | | 0.3 ms with input sampling speed set to fast and 0.6 ms with input sampling speed set to slow | | |
| Sampling cycle | | 1 ms with input sampling speed set to fast and 2 ms with input sampling speed set to slow | | |
| Arithmetic processing time | | 5 ms | | |
| External control inputs | | TIMING/GATE, ZERO, ZERO RESET, RESET | | |
| Words allocated | | 1 input word and 1 output word | | |
| Monitor output | Output signal | --- | -9.999 to 9.999 V | |
| | Output linearity | --- | $\pm 0.1\%$ FS | |
| | Output resolution | --- | 1/8192 | |
| | Output refresh period | --- | 0.5 s | |
| | Output response time | --- | 0.5 s | |
| | Allowable load resistance | --- | 10 k Ω min. | |
| Insulation | | Photocoupler insulation between input terminals and PLC signals and between input terminals and output terminals. | | |
| Dielectric strength | | 500 V AC for 1 minute between input terminals and output terminals 1,000 V AC for 1 minute between I/O terminals and FG | | |
| Internal current consumption | | 380 mA max. at 5 V DC | 450 mA max. at 5 V DC | |
| Weight | | 230 g max. | | |


Control Input

| Item | Specification |
|-----------------|--|
| Input voltage | 24 V DC $+10\%$ -15% |
| Input impedance | TIMING/GATE: 2 k Ω Other control output: 2.2 k Ω |
| Input current | TIMING/GATE: 9.2 mA TYP. (24 V DC) Other control output: 10.0 mA TYP. (24 V DC) |
| ON voltage | TIMING/GATE: 16.3 V DC min. Other control output: 17.1 V DC min. |
| OFF voltage | TIMING/GATE: 3.8 V DC max. Other control output: 3.6 V DC max. |
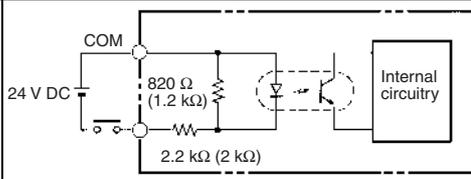
| Item | Specification |
|---------------------------------|--|
| ON/OFF response time (see note) | TIMING/GATE:50 μ s TYP. Other control output:4 ms TYP. |
| Circuit configuration |  <p>Figures in parentheses are values for TIMING/GATE input.</p> |

Note: The ON/OFF response time is the time required for the Unit's CPU Unit to detect input turned ON or OFF.

Example System Configuration

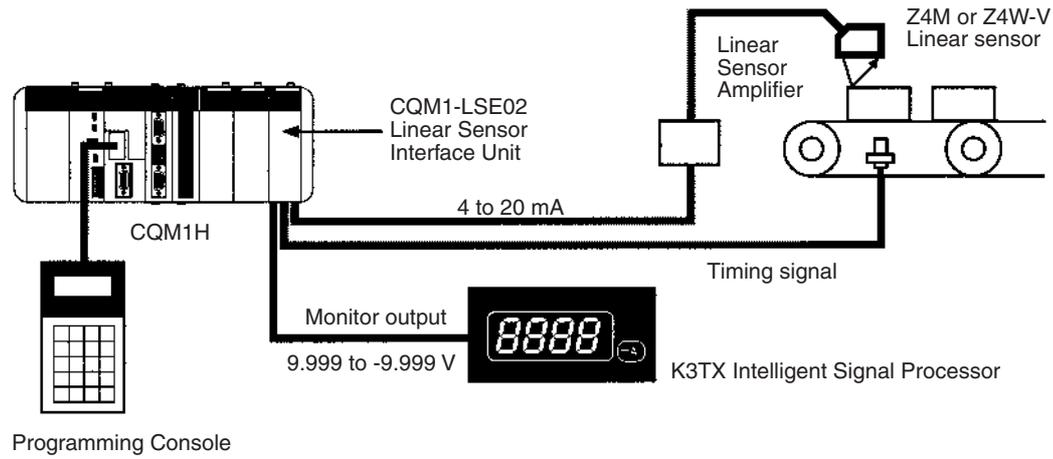


CQM1H-CTB41


High-speed Counter Board

The High-speed Counter Board is an Inner Board that counts up to 4 high-speed pulse inputs at up to 500 kHz, and can perform tasks according to the number of pulses counted.

- Can count 4-axis high-speed pulses at up to 500 kHz.
- Provides 4 external outputs on the Board.
- Both linear and ring counting modes are supported.
- The input can be a voltage input or an RS-422A line driver input.
- Three input modes are available: differential phase mode, up/down mode, and pulse + direction mode
- The counters can be set to record the present values in decimal or hexadecimal.

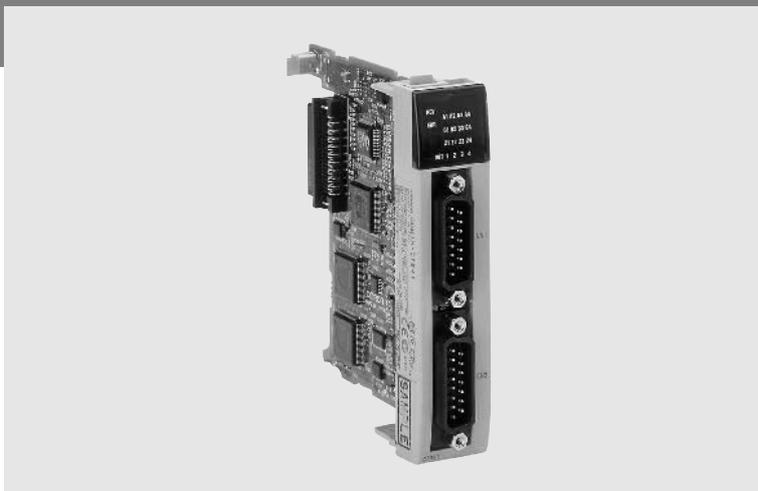

System Configuration

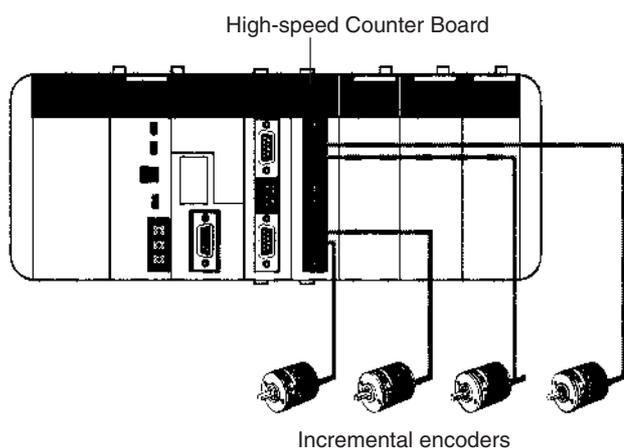

Specifications

General

| Item | Specifications |
|---|---|
| Name | High-speed Counter Board |
| Model number | CQM1H-CTB41 |
| Applicable CPU Units | CQM1H-CPU51/61 |
| Unit classification | CQM1H-series Inner Board |
| Mounting location/No. of Boards | Maximum of two Boards can be mounted simultaneously in slots 1 and 2. |
| Pulse inputs | 4 inputs |
| External outputs | 4 outputs |
| Current consumption (Supplied from Power Supply Unit) | 5 V DC, 400 mA max. |
| Dimensions | 25 × 110 × 107 mm (W × H × D) |
| Weight | 90 g max. |
| Standard accessories | Plugs: XM2D-1501 (OMRON) x 2 Hoods: XM2S-1511 (OMRON) x 2 |

Pulse Inputs (High-speed Counters)

Pulse Input Function

| Item | | Specifications | | |
|---|-------------------------|---|-----------------------------|---|
| Number of counters | | 4 counters (4 ports) | | |
| Input modes (Set in the PLC Setup.) | | Differential Phase Inputs | Up/Down Pulse Inputs | Pulse/Direction Inputs |
| Input method | | Switching between inputs using phase difference multiples of 1x, 2x, or 4x. (Set in the PLC Setup.) | Two single-phase inputs | Single-phase pulse and direction inputs |
| Count frequency (Set for each port in the PLC Setup.) | | 25 kHz (default) or 250 kHz | 50 kHz (default) or 500 kHz | 50 kHz (default) or 500 kHz |
| Count values | | Linear counting: -8388608 to 8388607 BCD, F8000000 to 07FFFFFF Hex Ring counting: 00000000 to 08388607 BCD, 00000000 to 07FFFFFF Hex | | |
| Control method | Target value comparison | Up to 48 target values and external/internal output bit patterns registered. | | |
| | Range comparison | Up to 16 upper limits, lower limits, and external/internal output bit patterns registered. | | |

Pulse Input

| Item | Specifications | | | |
|------------------------|---|----------------|--|---------------|
| Number of pulse inputs | 4 inputs (Ports 1 to 4 = High-speed counters 1 to 4) | | | |
| Signals | Encoder inputs A and B; pulse input Z | | | |
| Input voltage | Switched by means of input voltage switch on the Board (Specified separately for phases A, B, and Z.) | | | |
| | 24 V DC±10% | | RS-422A line driver (AM26LS31 or equivalent) | |
| | Phase A and B | Phase Z | Phase A and B | Phase Z |
| Input current | 5 mA typical | 8 mA typical | 10 mA typical | 13 mA typical |
| ON voltage | 19.6 V DC min. | 18.6 V DC min. | --- | --- |
| OFF voltage | 4.0 V DC min. | 4.0 V DC min. | --- | --- |

External Output

| Item | Specifications |
|----------------------------|--|
| Number of external outputs | 4 transistor outputs (The four outputs are set together as sinking or sourcing outputs in the PLC Setup.) |
| Function | The target comparison or range comparison results of high-speed counters 1 to 4 output four user-defined 4-bit external bit patterns (bits 08 to 11 of either IR 208 to IR 211 or IR 240 to IR 243). An OR is taken of corresponding bits in these four bit patterns, and the result is output on external outputs 1 to 4. |
| External power supply | 5 to 24 V DC±10% |
| Switching capacity | 16 mA/4.5 V DC to 80 mA/26.4 V |
| Leakage current | 0.1 mA max. |
| Residual voltage | 0.8 V max. |
| Response time | ON response: 0.1 ms max.; OFF response: 0.4 ms max. |

CQM1H-PLB21

Pulse I/O Board

The Pulse I/O Board is an Inner Board that supports two pulse inputs and two pulse outputs.

Pulse Inputs

- The two pulse inputs to high-speed counters count pulses at up to 50 kHz (signal phase) or 25 kHz (differential phase). Interrupt can be created based on the counter present values (PV).


Interrupts

The Board can execute an interrupt subroutine when the counter PV matches a specified target value (target value comparison) or falls within a specified comparison range (range comparison.)


Pulse Outputs 1 and 2

Two 10 Hz to 50 kHz pulses can be output. Both fixed and variable duty factors can be used.

- The fixed duty factor can be used to change the output frequency (accelerate or decelerate) from 10 Hz to 50 kHz smoothly.
- The variable duty factor performs using a duty factor ranging from 1% to 99%. Variable duty factor pulses can be used for applications such as time-proportional control.

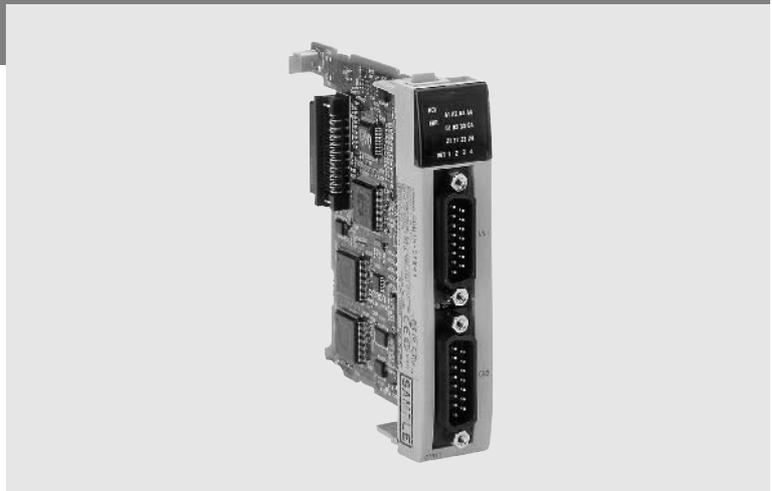

Example System Configuration

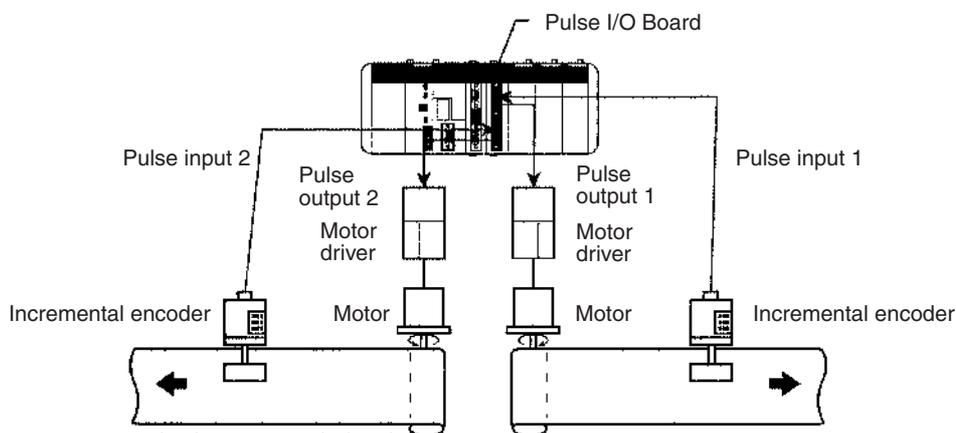

Specifications

General

| Item | Specifications |
|---|---|
| Name | Pulse I/O Board |
| Model number | CQM1H-PLB21 |
| Applicable CPU Units | CQM1H-CPU51/61 |
| Unit classification | CQM1H-series Inner Board |
| Mounting locations/No. of Boards | One in Inner Board slot 2 (right slot) |
| Pulse inputs | 2 inputs |
| Pulse outputs | 2 outputs |
| Current consumption (Supplied from Power Supply Unit) | 5 V DC, 160 mA max. |
| Dimensions | 25 × 110 × 107 mm (W × H × D) |
| Weight | 90 g max. |
| Standard accessories | Two XM2D-1501 Plugs and two XM2S-1511 Hoods (OMRON) |

Pulse Input (High-speed Counter)

Pulse Input Function

| Item | | Specifications | | |
|---|-------------------------|---|--------------------------------|------------------------|
| Number of counters | | 2 counters (ports) | | |
| Input Modes (Set for each port in the PLC Setup.) | | Differential phase input | Pulse/Direction input | Up/Down pulse input |
| Input method | | Phase difference multiple of 4 (Fixed) | Single-phase pulse + direction | Single-phase input x 2 |
| Count frequency | | 25 kHz | 50 kHz | 50 kHz |
| Count values | | Linear counting: -8388608 to 8388607 BCD Ring counting: 00000000 to 00064999 BCD | | |
| Control method | Target value comparison | Register up to 48 target values and interrupt subroutine numbers. | | |
| | Range comparison | Register up to 8 upper limits, lower limits, and interrupt subroutine numbers. | | |

Pulse Input

| Item | Specifications | | | |
|------------------------|---|---------------|----------------|---------------|
| Number of pulse inputs | 2 inputs (Ports 1 and 2 = Pulses 1 and 2) | | | |
| Signal names | Encoder input A, encoder input B, pulse input Z | | | |
| Input voltage | Switched by means of connector pins (Can be specified separately for phases A, B, and Z.) | | | |
| | 12 V DC±10% | | 24 V DC±10% | |
| Input current | Phases A and B | Phase Z | Phases A and B | Phase Z |
| | 5 mA typical | 12 mA typical | 5 mA typical | 12 mA typical |
| ON voltage | 10.2 V DC min. | | 20.4 V DC min. | |
| OFF voltage | 3.0 V DC min. | | 4.0 V DC min. | |

Pulse Output

Pulse Output Function

Pulse output function is determined by the output method, as indicated below.

| Item | Fixed duty factor | | | Variable duty factor |
|---------------------------------|---|--|---|---------------------------|
| | Without trapezoidal acceleration/ deceleration | With trapezoidal acceleration/deceleration | | |
| | | Same acceleration/ deceleration rates | Separate acceleration/ deceleration rates | |
| Instruction | PULS(65)/SPED(64) | PLS2(—) | PULS(65)/ ACC(—) | PWM(—) |
| Output frequency | 10 Hz to 50 kHz (10 Hz to 20 kHz for stepping motor) | 0 Hz to 50 kHz | 100 Hz to 50 kHz | 91.6 Hz, 1.5 kHz, 5.9 kHz |
| Output frequency pitch | 1 or 10 Hz | 10 Hz | | --- |
| Duty factor | 50% fixed | | | 1 to 99% |
| Number of output pulses | 1 to 16,777,215 | | | --- |
| Acceleration/ deceleration rate | --- | 10 Hz to 2 kHz (every 4.08 ms) | | --- |

Output

| Item | Specifications |
|-------------------------|--|
| Number of pulse outputs | 2 outputs (Ports 1 and 2 = Pulse outputs 1 and 2) |
| Signal names | CW and CCW pulse output |
| Max. output frequency | 50 kHz (20 kHz with stepping motor connected.) |
| External power supply | 5 V DC±5% 30 mA min.; 24 V DC ^{+10%} / _{-15%} 30 mA min. |
| Max. switching capacity | NPN open collector, 30 mA/5 to 24 V DC±10% |
| Min. switching capacity | NPN open collector, 7 mA/5 to 24 V DC±10% |
| Leakage current | 0.1 mA max. |
| Residual voltage | 0.4 V max. |

CQM1H-ABB21

Absolute Encoder Interface Board

The Absolute Encoder Interface Board is an Inner Board that allows position data to be directly input from absolute rotary encoders.


Absolute High-speed Counter

The Absolute Encoder Interface Board reads binary gray codes (inverted binary codes) input from an absolute encoder at a maximum counting rate of 4 kHz, and can perform interrupt processing according to the input values.


Interrupts

An interrupt subroutine can be executed when the PV (present value) of the absolute high-speed counter matches a specified target value (target value comparison) or falls within a specified comparison range (range comparison.)

Note: When an absolute encoder is used the position data can be retained even during power interrupts, so it isn't necessary to perform an origin return when power is returned. In addition, the origin compensation function allows the user to specify any position as the origin.

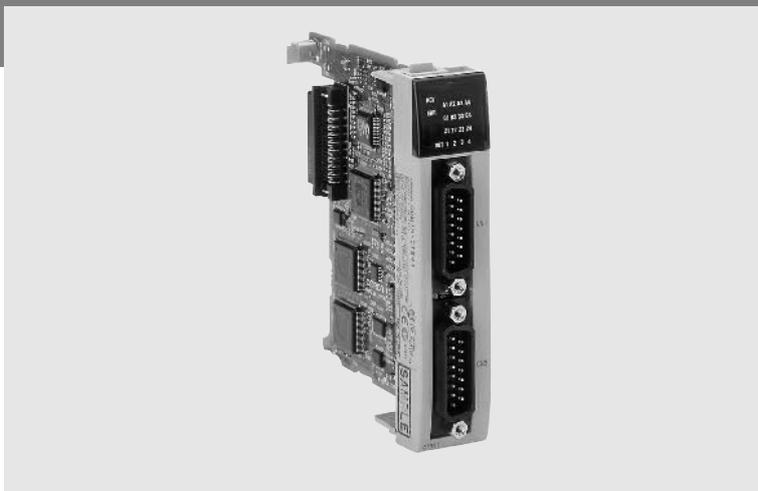

Example System Configuration

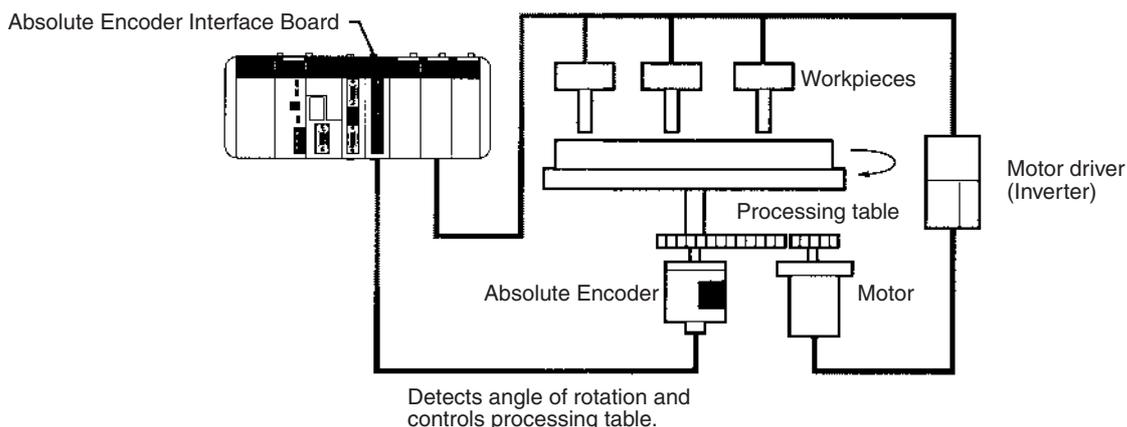

Specifications

General

| Item | Specifications |
|---|--|
| Name | Absolute Encoder Interface Board |
| Model number | CQM1H-ABB21 |
| Applicable CPU Units | CQM1H-CPU51/61 |
| Unit classification | CQM1H-series Inner Board |
| Mounting locations and number of Boards | 1 Board can be mounted in slot 2. |
| Absolute Encoder inputs | 2 inputs |
| Current consumption (Supplied from Power Supply Unit) | 5 V DC, 150 mA max. |
| Dimensions | 25 × 110 × 107 mm (W × H × D) |
| Weight | 90 g max. |
| Standard accessories | Plugs:XM2D-1501 (OMRON) x 2 Hoods:XM2S-1511 (OMRON) x 2 |

Absolute Encoder Input

| Item | | Specifications |
|---------------------|-------------------------|--|
| Number of inputs | | Two inputs |
| Input code | | Binary gray code |
| Operating modes | | BCD Mode or 360° Mode (Set in PLC Setup.) |
| Resolutions | | 8-bit, 10-bit, or 12-bit (Set in PLC Setup.) |
| Origin compensation | | Supported. (Current position can be designated as origin). Compensation is set in PLC Setup. |
| Counting rate | | 4 kHz max. |
| Control methods | Target value comparison | Register up to 48 target values and interrupt subroutine numbers. |
| | Range comparison | Register up to 8 upper limits, lower limits, and interrupt subroutine numbers. |

Pulse Inputs

| Item | | Specifications |
|-----------------|--|--------------------|
| Input voltage | | 24 V DC +10%, -15% |
| Input impedance | | 5.4 kΩ |
| Input current | | 4 mA typical |
| ON voltage | | 16.8 V DC min. |
| OFF voltage | | 3.0 V DC max. |

Communications Units

Summary of Dedicated I/O Units


| Name | Specifications | Model number | Page |
|-----------------------------|--|---------------|------|
| Serial Communications Board | One RS-232C port and one RS422/RS485 port, Protocol Macro function | CQM1H-SCB41 | 151 |
| Controller Link Unit | High-capacity, efficient data link between PLC's | CQM1H-CLK21 | 153 |
| PROFIBUS-DP I/O Link Unit | Exchanges from 2 to 8 words I/O with any PROFIBUS-DP Master Unit | CQM1-PRT21 | 155 |
| DeviceNet I/O Link Unit | DeviceNet Slave: 32 points (16 inputs and 16 outputs) | CQM1-DRT21 | 157 |
| CompoBus/S Master Unit | 128 points (64 inputs and 64 outputs), 64 points (32 inputs and 32 outputs), or 32 points (16 inputs and 16 outputs) selectable with a switch. | CQM1-SRM21-V1 | 158 |
| AS-Interface Master Unit | Can control up to 31 AS-Interface slaves with up to 4 inputs + 4 outputs each. | CQM1-ARM21 | 159 |

CQM1H-SCB41


Serial Communications Board

The Serial Communications Board is an Inner Board equipped with 2 ports that can be used to connect host computers, Programmable Terminals, external serial devices, or Programming Devices other than a Programming Console.

- Unlike the CPU Unit's built-in ports, the Serial Communications Board supports the protocol macro function which can improve communications between the CQM1H and external serial devices.
- The Serial Communications Board has 2 ports: an RS-232C port and an RS-422A/485 port. The RS-422A/485 port supports 1:N connections (protocol macro or NT Link in 1:N mode) without an adapter.

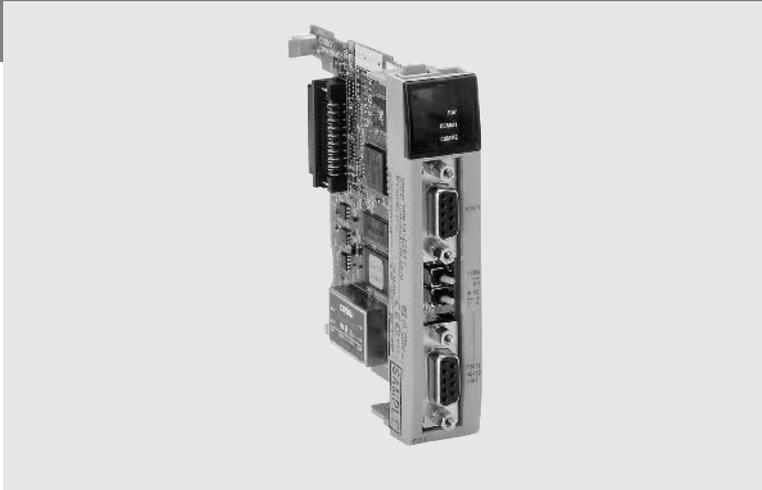

Example System Configuration

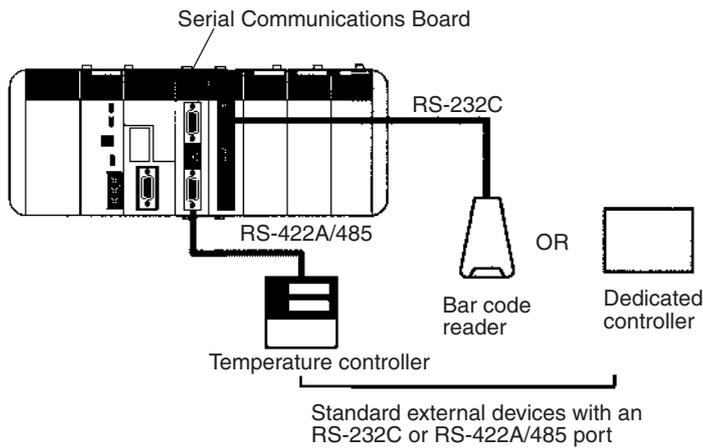

Specifications

Serial Communications Board

| Item | Specification |
|---|--|
| Model | CQM1H-SCB41 |
| Unit classification | CQM1H-series Inner Board |
| Applicable CPU Units | CQM1H-CPU61/51 |
| Mounting locations and number of Boards | 1 Board can be mounted in slot 1. |
| Serial Communications ports | Port 1: RS-232C: 19.2 kbps max., 15 m max. Port 2: RS-422A/485: 19.2 kbps max., 500 m max. |
| Protocols | Port 1: Each port can be set independently to Host Link, No-protocol, Protocol macro, 1:1 Data Link, NT Link in 1:N mode, or NT Link in 1:1 mode. Port 2: |
| Current consumption | 5 V DC, 200 mA max. |
| Dimensions | 25 × 110 × 107 mm (W × H × D) |
| Weight | 90 g max. |
| Standard accessories | Plugs:XM2SA-0901 (OMRON) x 2 Hoods:XM2SA-0911 (OMRON) x 2 (ESD) |

Communications Modes

The following 6 communications modes can be set independently for the two Serial Communications Board ports.

- Host Link: Communications with a host computer, Programming Device, or Programmable Terminal
- No-protocol: No-protocol communications (TXD and RXD) with standard external devices
- Protocol macro: Communications according to the external device's communications specifications
- 1:1 Data Link: Data link with a CQM1H, CQM1, or other C-series PLC
- NT Link in 1:N mode: One-to-one or one-to-N communications with Programmable Terminals
- NT Link in 1:1 mod: One-to-one communications with Programmable Terminal


| Serial communications protocol | CQM1H-SCB41 Serial Communications Board | |
|---|---|---------------------------|
| | RS-232C port (port 1) | RS-422A/485 port (port 2) |
| Peripheral bus or Programming Console bus | No | No |
| Host Link (SYSMAC WAY) | YES | YES ¹ |
| Protocol macro | YES | YES |
| No-protocol | YES | YES ¹ |
| 1:1 Data Link | YES | YES ¹ |
| NT Link in 1:1 mode | YES ² | YES ² |
| NT Link in 1:N mode | YES ² | YES ² |

- Note:**
1. The 4-wire method must be used if the RS-422A/485 port is used in Host Link, No-protocol, or 1:1 Data Link mode.
 2. A Programmable Terminal's Programming Console function cannot be used.

Protocol Macros

Protocol macros provide a way to create data communications protocols for the communications specifications of external devices with serial communications ports (half-duplex, start-stop sync only). The protocol macros are made on the CX-Protocol Support Software and then recorded in the Serial Communications Board, where they can be executed at any time using the PMCR instruction in the CPU Unit's ladder program.

Standard system protocols are also provided with the CX-Protocol and Serial Communications Board for easy communications with OMRON components, such as Temperature Controllers, Intelligent Signal Processors, Bar Code Readers, and Modems. The standard system protocols can also be modified for specific applications using the CX-Protocol.

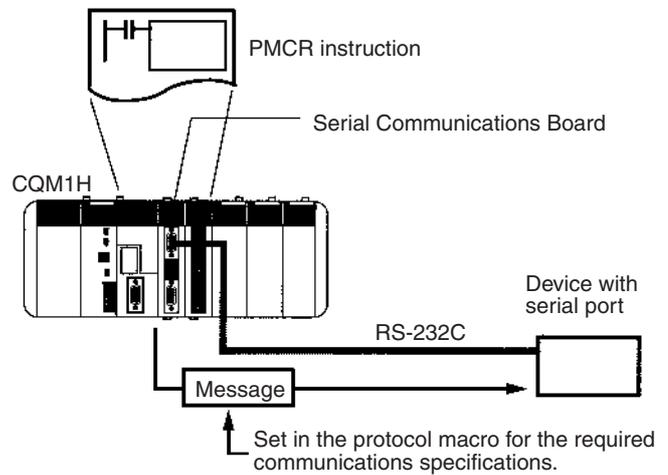

CQM1H-CLK21

Controller Link Unit


Controller Link is an FA network to send and receive large data packets flexibly and easily among the OMRON CQM1H-series, C200HX/HG/HE, CS-series, CVM1, and CV-series PLCs.

Controller Link supports data links that enable data sharing and a message service that enables sending and receiving data when required. Data link areas can be freely set to create a flexible data link system and effectively use data areas.


- High-capacity, flexible, and efficient data links
- Message service can transfer large quantities of data.
- Simple twisted-pair wiring
- Easily connects different PLC models and computers.
- Flexible inter-network connections
- Robust error-handling functions



Data Links

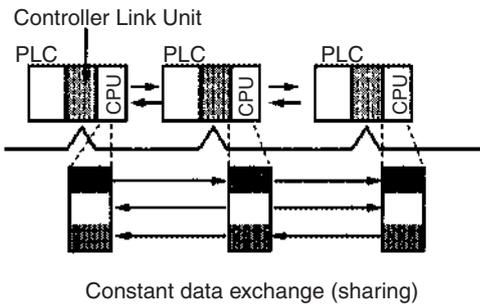

Message Service

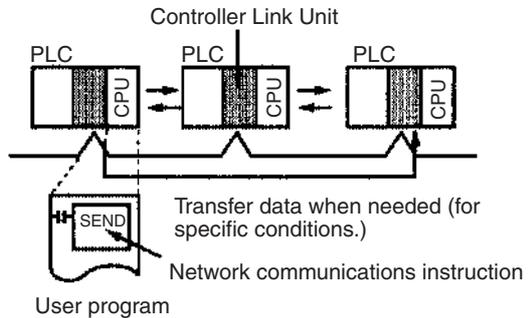

Specifications

General

| Item | Specifications |
|---|--|
| Name | Controller Link Unit |
| Model number | CQM1H-CLK21 |
| Applicable CPU Units | CQM1H-CPU51/CPU61 |
| Unit classification | Communications Unit |
| Connection location and number of Units | One Unit only. The Unit must be connected between the Power Supply Unit and the CPU Unit. |
| Current consumption | 270 mA |
| Dimensions | 32 × 110 × 107 mm (W × H × D) (without terminals) |
| Weight | 170 g max. |

Communications

| Item | Specifications |
|---|--|
| Communications method | N:N token bus |
| Code | Manchester code |
| Modulation | Baseband code |
| Synchronization | Flag synchronization (conforms to HDLC frames) |
| Transmission path form | Multi-drop bus |
| Baud rate and maximum transmission distance | The maximum transmission distance varies with the baud rate as follows: 2 Mbps:500 m 1 Mbps:800 m 500 Kbps:1 km |
| Media | Specified shielded twisted-pair cable Number of signal lines: 2, shield line: 1 |
| Maximum number of nodes | 32 nodes |
| Communications functions | Data links and message service |
| Number of data link words | Transmission area per node: 1,000 words max. Data link area in one CQM1H-series PLC (send/receive): 8,000 words max. |
| Data link areas | Bit areas (IR, AR, LR, CIO), data memory (DM), and extended data memory (EM) |
| Message length | 2,012 bytes max. (including the header) |
| RAS functions | Polling node backup function Self-diagnosis function (hardware checking at startup) Echo-back test and broadcast test (using the FINS command) Watchdog timer Error log function |
| Error control | Manchester code check CRC check (CCITT $X^{16} + X^{12} + X^5 + 1$) |

CQM1-PRT21

PROFIBUS-DP I/O Link Unit

PROFIBUS-DP Slave for CQM1(H) PLCs

- No PLC settings need to be made.
- Auto-detect all PROFIBUS-DP baud rates from 9.6kbit/s to 12 Mbit/s.
- Slave address setting, selectable from 0 to 99.
- Support and indication of PROFIBUS-DP broadcast functions (Sync/Freeze/Clear).
- Communication status available externally via relay output.
- Configurable for 2, 4, 6 or 8 words.



Ordering Information

| Product Code | Description |
|--------------|---|
| CQM1-PRT21 | PROFIBUS-DP slave unit for CQM1(H) PLCs |


Specifications

Communication Specification

| | |
|-----------------------------|---|
| Applicable standard | EN 50170 vol. 2 |
| Station type | Modular station, max. 1 module Configurable with I/O-modules of 2, 4, 6 or 8 words |
| Data consistency | By word |
| Bus connector | 9-pin female sub-D connector (RS-485 PROFIBUS connector) |
| Bus termination | External |
| Baud rate (auto-detect) | 9.6 / 19.2 / 45.45 / 93.75 / 187.5 / 500 kbit/s, 1.5 / 3 / 6 / 12 Mbit/s |
| PROFIBUS address range | 0 to 99, Remote setting not supported |
| Communication cable | Type A (EN 50170 vol. 2) |
| Minimum slave interval time | 0.5 ms |
| Watchdog base | 10 ms, 1 ms selectable by parameter setting |
| Supported DP functions | <ul style="list-style-type: none"> • Data_Exchange • Slave_Diag • Set_Prm • Chk_Cfg • Global_Control (SYNC, FREEZE, CLEAR) • Get_Cfg • RD_Inp • RD_Outp |
| PROFIBUS-DP GSD file | OC_054D.GSD |

Unit Specification

| | |
|---|--|
| Host PLC system | CQM1, CQM1H |
| Switch settings | Number of I/O words Motorola/Intel data format PROFIBUS-DP address |
| LED indicators | Unit status: RUN (green LED), ERR (red LED) Network status: COMM (green LED), BF (red LED) WD OFF (yellow LED), CLEAR (yellow LED) SYNC (yellow LED), FREEZE (yellow LED) |
| No. of occupied words | Configurable by DIP switches (see note) <ul style="list-style-type: none"> • 2 words in + 2 words out • 4 words in + 4 words out • 6 words in + 6 words out • 8 words in + 8 words out |
| I/O refresh time (data exchange with CPU) | Max. 0.16 ms |
| Current consumption (max) | 350 mA at 5 V DC (at CQM1 I/O bus) |
| Weight | 170 g |
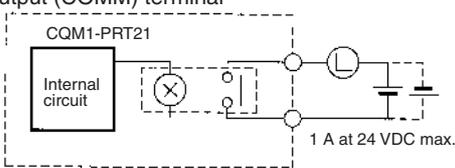
| | |
|------------------------------|---|
| Storage temperature | -20 to +75 °C |
| Operating temperature | 0 to +55 °C |
| Operating humidity | 10% to 90% (non-condensing) |
| EMC compliance | EN50081-2, EN61131-2 |
| Circuit configuration | <p>Communication status output (COMM) terminal</p>  |


Note: The CQM1-PRT21 can be mounted to any CQM1- or CQM1H-series CPU. The maximum amount of I/O data that can be exchanged with the CPU depends on the selected CPU type, and on the number and type(s) of any additional I/O unit(s). To operate with the Unit's maximum I/O capacity, a CQM1H-CPU51 or CQM1H-CPU61 is required.

Communication status output

The COMM relay contact output indicates if data exchange with the PROFIBUS-DP master unit is active. This signal can be connected to a PLC input or external signalling device. It is recommended to use this information in the PLC to judge the validity of the received data.

| | |
|---------------------|---|
| ON state | <ul style="list-style-type: none"> I/O data exchange with the PROFIBUS-DP master is active. |
| OFF state | <ul style="list-style-type: none"> PLC Power OFF Fatal error in PLC CPU or I/O bus. No I/O data exchange with PROFIBUS-DP master (check LED indication). |
| Relay type | OMRON G6H-2F, non-replaceable |
| Maximum load | 1 A at 24 V DC |
| ON/OFF delay | less than 10 ms |
| Connector | Phoenix MSTBA 2,5/2-G |

Nomenclature

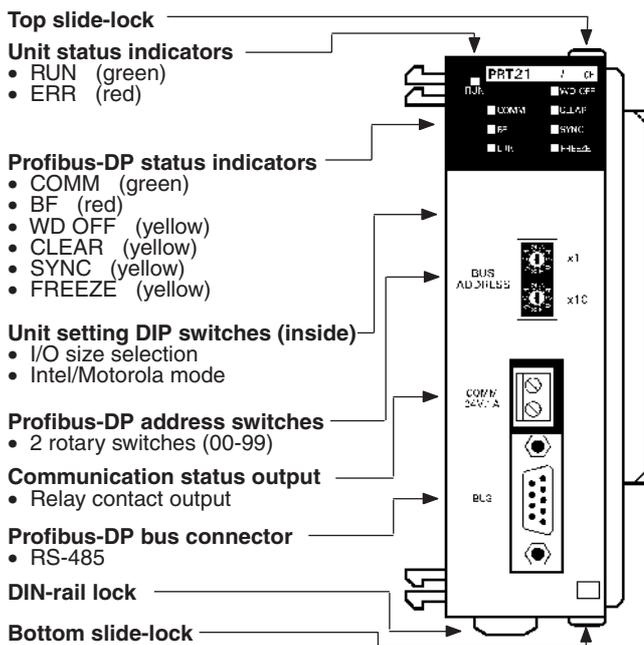

CQM1-DRT21

DeviceNet I/O Link Unit

Distributed control

The DeviceNet I/O link unit is a DeviceNet slave that conforms to the open standard DeviceNet. DeviceNet I/O link units can be used to connect one or more CQM1H PLCs to a DeviceNet Master.

A maximum of 32 I/O points (16 inputs and 16 outputs).



Specifications

General

| | |
|-------------------------------------|---|
| Communications power supply voltage | 11 to 25 V DC supplied through communications connector |
| Current consumption | Communications power supply:40 mA max. at 24 V DC Internal circuit power supply:80 mA max. at 5 V DC |
| Number of I/O points | 16 inputs and 16 outputs (32 in total) |
| Number of occupied words | 1 input word and 1 output word (2 words in total) |
| Weight | 185 g max. |

Communications (Conforming to DeviceNet Standards)


| | | | | |
|----------------------------------|---|-------------------------------------|-----------------------|-----------------------------|
| Connection method | Multi-drop, T-type bifurcation (both require external terminating resistor) | | | |
| Baud rate | 500, 250, or 125 kbps (selectable with a switch) | | | |
| Communications cycle time | 9.3 ms with 16 Input Slaves (16 inputs) and 16 Output Slaves (16 outputs) at a speed of 500 kbps. | | | |
| Cable | Dedicated 5-conductor cable (with two signal wires, two power wires, and a shield wire) | | | |
| Communications distance | Baud rate | Max. network length (see note 1) | Branch line length | Total branch line length |
| | 500K bps | 100 m max. (see note 2) | 6 m max. | 39 m max. |
| | 250K bps | 250 m max. (see note 2) | 6 m max. | 78 m max. |
| | 125K bps | 500 m max. (see note 2) | 6 m max. | 156 m max. |
| Max. number of connectable nodes | CVM1 or CV Series: 64 nodes, C200HX/HG/HE: 50 nodes, C200HS: 32 nodes | | | |
| Error control | CRC errors, node address duplication, scan line checks | | | |

- Note:** 1. The maximum network length refers to the distance between two nodes farthest from each other.
2. The communications distance will be 100 m or less if a thin dedicated cable is used for the trunk line.

Words Allocated by CQM1H Slaves

The CQM1H treats the I/O Link Unit as a single I/O Unit that has one input word and one output word. Words are allocated like I/O Units (i.e., input words from IR 001 and output words from IR 100 in order of the Units) beginning with the leftmost Unit.

Allocation Example

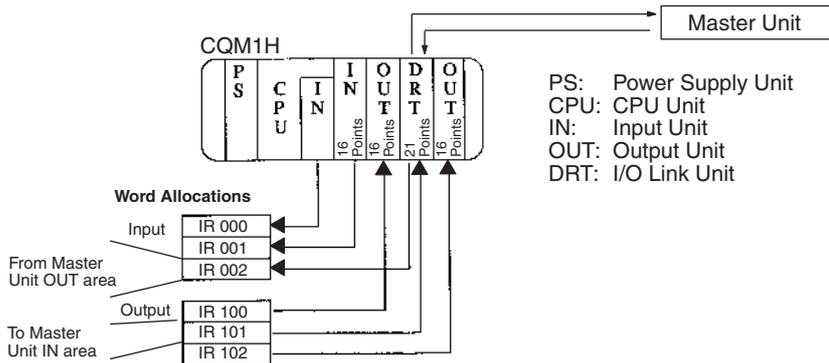

CQM1-SRM21-V1

CompoBus/S Master Unit

CompoBus/S master unit supports both a High-speed Communications Mode and a Long-distance Communications Mode.

- Number of I/O points per Master: 128 max. (may be set to 64 or 32 points)
- Number of Slaves per Master: 16 or 32
- Communications cycle time: 0.5 ms max. (baud rate: 750 kbps)
- Communications distance: 500 m max. (baud rate: 93.75 kbps)



Specifications

General

| | |
|-----------------------------------|--|
| Internal current consumption | 180 mA max. at 5 V DC |
| Number of I/O points | 128 points (64 inputs and 64 outputs), 64 points (32 inputs and 32 outputs), or 32 points (16 inputs and 16 outputs) selectable with a switch. |
| Number of occupied words | 128 points: 4 input words and 4 output words 64 points: 2 input words and 2 output words 32 points: 1 input word and 1 output word |
| Number of points per node | 8 or 4 points (selectable with a switch) |
| Max. number of connectable Slaves | 32 (with 4 points per node) |
| Status data | Alarm terminal output |
| Weight | 200 g max. |

Note: For details regarding CompoBus/S, refer to the CompoBus/S part of the Industrial Communication chapter.

Communication


| | | | | | |
|----------------------------------|-----------------------------------|--|---|--------------------|-------------------|
| Communications protocol | | Dedicated CompoBus/S protocol | | | |
| Code | | Manchester code | | | |
| Connection method | | Multi-drop, T-type bifurcation (both methods require external terminating resistor) (See note 1.) | | | |
| Baud rate | | 750 kbps, 93.75 kbps (selectable with a DIP switch) (See note 2.) | | | |
| Communications cycle time | High-speed Communications Mode | 0.5 ms (with a maximum number of 8 Input and 8 Output Slaves) 0.8 ms (with a maximum number of 16 Input and 16 Output Slaves) | | | |
| | Long-distance Communications Mode | 4.0 ms (with a maximum number of 8 Input and 8 Output Slaves) 6.0 ms (with a maximum number of 16 Input and 16 Output Slaves) | | | |
| Cable | | Two-conductor cable (VCTF 0.75 x 2), four-conductor cable (VCTF 0.75 x 4), or dedicated flat cable | | | |
| Communications distance | High-speed Communications Mode | Two-conductor VCTF cable | | | |
| | | Communications Mode | Trunk line length | Branch line length | Total line length |
| | | High-speed mode | 100 m max. | 3 m max. | 50 m max. |
| | | Long-distance mode | 500 m max. | 6 m max. | 120 m max. |
| | | Dedicated flat cable/ four-conductor VCTF cable | | | |
| | | Communications Mode | Trunk line length | Branch line length | Total line length |
| | | High-speed mode (see note 3) | 30 m max. | 3 m max. | 30 m max. |
| | | Long-distance mode (see note 4) | Free branching (total cable length: 200 m max.) | | |
| Max. number of connectable nodes | | 32 | | | |
| Error control | | Manchester code, frame length, and parity checks | | | |

- Note:**
1. An external Terminating Resistor is required.
 2. Setting must be made using the DIP switch. (Change the DM setting for selecting the communications mode. Default setting: 750 kbps)
 3. If the number of Slaves connected is smaller than 16, the trunk line length can be less than 100 m and the total line length can be less than 50 m.
 4. There are no restrictions on the branching method, trunk line length, branch line length, or total line length. Connect the terminating resistor on the location, most remote from the master.

Dimensions

Note: All dimensions are in millimeters.

Overall CQM1H Dimensions

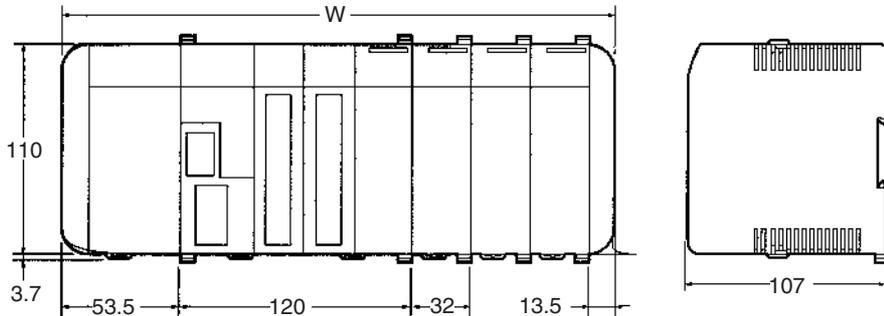

Overall PLC Widths for Example Configurations


| Number of I/O Units | PA203 Power Supply Unit | PA206, PA216, or PD026 Power Supply Unit |
|---------------------|-------------------------|--|
| | W (mm) | W (mm) |
| 3 | 283 | 315 |
| 4 | 315 | 347 |
| 5 | 347 | 379 |

Calculating Overall PLC Width with “n” I/O Units

| Power Supply Unit | W (mm) |
|-------------------|---------------------|
| CQM1-PA203 | $32 \times n + 187$ |
| CQM1-PA206 | $32 \times n + 219$ |
| CQM1-PA216 | |
| CQM1-PD026 | |

Note: The total number of I/O Units and Dedicated I/O Units (n) is limited to 12 Units (11 without a Communications Unit) for the CQM1H-CPU51/61 and 11 Units for the CQM1H-CPU11/21.

Power Supply, CPU, Communications, Dedicated I/O and I/O Units

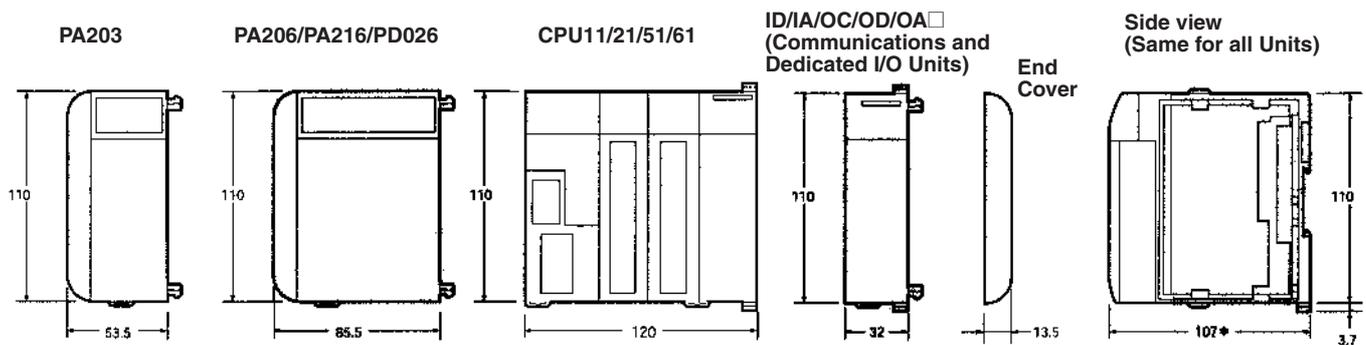


*The CQM1-OC224 is 131.7 mm wide.

| Name | Model | Weight |
|--------------------|-------------|------------|
| Power Supply Units | CQM1-PA203 | 460 g max. |
| | CQM1-PA206 | 560 g max. |
| | CQM1-PD026 | |
| | CQM1-PA216 | |
| CPU Units | CQM1H-CPU11 | 500 g max. |
| | CQM1H-CPU21 | 510 g max. |
| | CQM1H-CPU51 | |
| | CQM1H-CPU61 | |
| Input Units | CQM1-ID211 | 180 g max. |
| | CQM1-ID111 | |
| | CQM1-ID212 | |
| | CQM1-ID112 | 160 g max. |
| | CQM1-ID213 | |
| | CQM1-ID214 | |
| | CQM1-IA121 | 210 g max. |
| | CQM1-IA221 | |

| Name | Model | Weight |
|--------------|------------|------------|
| Output Units | CQM1-OC221 | 200 g max. |
| | CQM1-OC222 | 230 g max. |
| | CQM1-OC224 | 270 g max. |
| | CQM1-OD211 | 200 g max. |
| | CQM1-OD212 | 180 g max. |
| Output Units | CQM1-OD213 | 160 g max. |
| | CQM1-OD214 | 210 g max. |
| | CQM1-OD215 | 240 g max. |
| | CQM1-OD216 | 210 g max. |
| | CQM1-OA221 | 240 g max. |
| | CQM1-OA222 | |


I/O Expansion Units

CQM1H-IC101

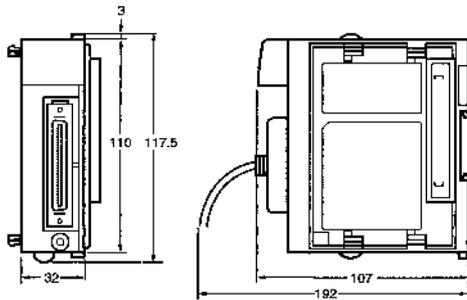


Weight: 131 g max.

CQM1H-II101

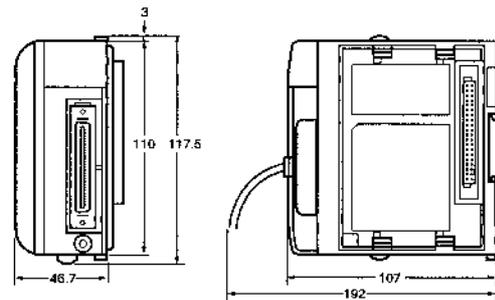


Weight: 211 g max.

Programming Console
CQM1H-PRO01-E

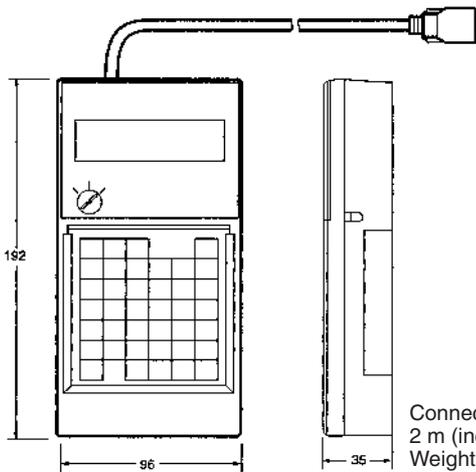


Connecting cable length:
2 m (included)
Weight: 515 g max.

Programming Console
CQM1-PRO01-E

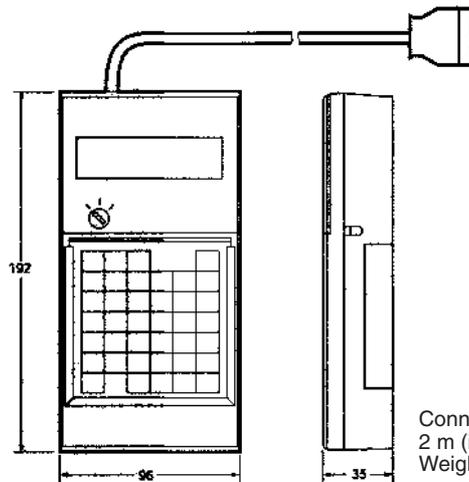


Connecting cable length:
2 m (included)
Weight: 515 g max.

DIN Track
PFP-100N2

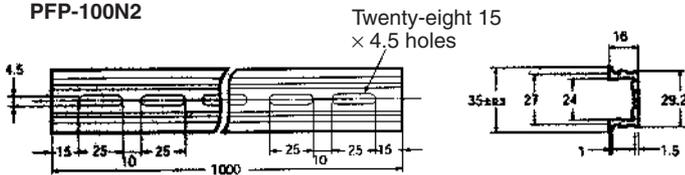

Twenty-eight 15
× 4.5 holes

PFP-100N/50N

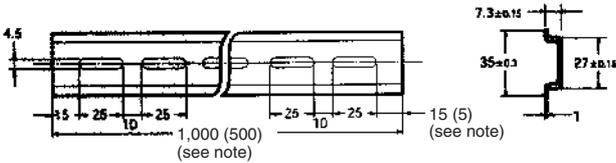

Note: The figures in parentheses are for the PFP-50N.

Ordering Information

International Standards

The products shown in the attached tables are those that conform to the UL, CSA, cULus, cUL, NK, Lloyd's Register, and EC Directives as of September 2003.

(U: UL, C: CSA, UC: cULus, CU: cUL, N: NK, L: Lloyd, CE: EC Directives)

Please contact OMRON representative for application conditions.

EMC Directives

OMRON devices that comply with EC Directives also conform to the related EMC standards so that they can be more easily built into other devices or the overall machine. The actual products have been checked for conformity to EMC standards (see the following note). Whether the products conform to the standards in the system used by the customer, however, must be confirmed by the customer.

EMC-related performance of the OMRON devices that comply with EC Directives will vary depending on the configuration, wiring, and other conditions of the equipment or control panel on which the OMRON devices are installed. The customer must, therefore, perform the final check to confirm that devices and the overall machine conform to EMC standards.

Applicable EMC Standards

EMS (Electromagnetic Susceptibility):

EN61131-2

EMI (Electromagnetic Interference):

EN50081-2

(Radiated emission: 10-m regulations)

Low Voltage Directive

OMRON Power Supply Units and I/O Units have been determined safe when operating at voltages of 50 to 1,000 V AC and 75 to 1,500 V DC according to the safety standards in EN61131-2.

Power Supply Units

| Name | Specifications | | | | Model | International standards |
|-----------------------|-----------------|-----------------------|-----------------|----------------------|------------|-------------------------|
| | Rated voltage | Allowed voltage range | Output capacity | Service power supply | | |
| AC Power Supply Units | 100 to 240 V AC | 85 to 265 V AC | 18 W | None | CQM1-PA203 | U, C, N, L, CE |
| | 50/60 Hz | | 30 W | 24 V DC 0.5 A | CQM1-PA206 | U, C, L, N |
| | 110/230 V AC | 80 to 138 V AC | 30 W | 24 V DC 0.5 A | CQM1-PA216 | N, L, CE |
| | 50/60 Hz | 160 to 276 V AC | | | | |
| DC Power Supply Units | 24 V DC | 20 to 28 V DC | 30 W | --- | CQM1-PD026 | UC, N, L, CE |

CPU Units (with 16 built-in DC input points)

| Specifications | | | | | | Model | International standards |
|--|--------------|-----------------|-----------------------|-------------------------|---------------------------------|-------------|-------------------------|
| Memory capacity | I/O capacity | Built-in inputs | Built-in RS-232C port | Support of Inner Boards | Support of Controller Link Unit | | |
| Program: 3.2 kWords DM area: 3 kWords | 256 points | 16 DC inputs | No | No | No | CQM1H-CPU11 | U, C, N, L, CE |
| | | | Yes | | | | |
| Program: 7.2 kWords DM area: 6 kWords | 512 points | | | Yes | Yes | CQM1H-CPU51 | UC, N, L, CE |
| Program: 15.2 kWords DM area: 6 kWords EM area: 6 kWords | | | | | | | CQM1H-CPU61 |

Inner Boards

| Name | Specifications | Model | International standards |
|----------------------------------|--|-------------|-------------------------|
| High-speed Counter Board | 4 pulse inputs (high-speed counter) at 500 kHz max. 4 external outputs | CQM1H-CTB41 | U, C, N, L, CE |
| Pulse I/O Board | 2 pulse inputs, Single-phase: 50 kHz, Differential phase: 25 kHz 2 pulse outputs, 50 kHz max. Both fixed and variable duty factors are supported. | CQM1H-PLB21 | U, C |
| Absolute Encoder Interface Board | 2 absolute encoder (gray code binary) inputs (4 kHz) | CQM1H-ABB21 | U, C, N, L |
| Analog Setting Board | 4 analog settings | CQM1H-AVB41 | U, C, N, L, CE |
| Analog I/O Board | 4 analog inputs of 0 to 5 V, 0 to 20 mA, -10 to +10 V 2 analog outputs of 0 to 20 mA, -10 to +10 V | CQM1H-MAB42 | CE |
| Serial Communications Board | One RS-232C port and one RS-422A/485 port | CQM1H-SCB41 | U, C, N, L, CE |

Communications Units

| Name | Specifications | Model | International standards |
|------------------------------|--|---------------|-------------------------|
| Controller Link Unit (Wired) | Data link (Maximum number of words per node: 8,000) Message communications (SEND/RECV/CMND instructions) | CQM1H-CLK21 | U, C, CE |
| PROFIBUS-DP I/O Link Unit | Exchanges from 2 to 8 words I/O with any PROFIBUS-DP Master Unit | CQM1-PRT21 | UC, L, CE |
| DeviceNet I/O Link Unit | Number of I/O points: 16 inputs and 16 outputs | CQM1-DRT21 | U, C, CE |
| CompoBus/S Master Unit | Number of I/O points per Master: 128 (64 inputs and 64 outputs) Communications cycle time: 0.5 ms min. | CQM1-SRM21-V1 | U, C, CE |
| AS-Interface Master Unit | Can control up to 31 AS-Interface slaves with up to 4 inputs + 4 outputs each. Communications cycle time: 5 ms max. | CQM1-ARM21 | CE |

Memory Cassettes

| Memory | Memory capacity/Clock function | Model | International standards |
|---|--|-------------|-------------------------|
| Flash memory | 16 kWords | CQM1H-ME16K | U, C, N, L, CE |
| | with clock | CQM1H-ME16R | |
| EEPROM | 8 kWords | CQM1-ME08K | UC, N, L, CE |
| | with clock | CQM1-ME08R | |
| | 4 kWords | CQM1-ME04K | |
| EPROM Memory Cassette (Memory chip not included) | Cassette with IC socket only (EPROM chip sold separately) | CQM1-MP08K | U, C, N, L, CE |
| | with clock | CQM1-MP08R | |
| EPROM chip | 128 KB (8 kWords), 150 ns, 27128 IC or equivalent, 12.5 V | ROM-ID-B | L |
| | 256 KB (16 kWords), 150 ns, 27256 IC or equivalent, 12.5 V | ROM-JD-B | CE |
| | 512 KB (32 kWords), 150 ns, 27512 IC or equivalent, 12.5 V | ROM-KD-B | |

Available Models

| Memory | Memory capacity/Clock function | Model | International standards |
|---------------------|---|---------------------|-------------------------|
| I/O Control Unit | Connects to right-hand side of CPU Block | CQM1H-IC101 | U, C, CE |
| I/O Interface Unit | Connects to left-hand side of Expansion I/O Block | CQM1H-II101 | |
| I/O Extension Cable | For connection with I/O Control Unit and I/O Interface Unit | Cable length: 0.3 m | L, CE |
| | | Cable length: 0.7 m | |
| | | CS1W-CN313 | |
| | | CS1W-CN713 | |

I/O Units

Input Units

| Input type | Specifications | Model | International standards |
|------------|--|------------|-------------------------|
| DC inputs | 8 points, 12 to 24 V DC (independent commons, 1 point/common × 8 circuits) | CQM1-ID211 | U, C, N, L, CE |
| | 16 points, 12 V DC (16 points/common × 1 circuit) | CQM1-ID111 | U, C |
| | 16 points, 24 V DC (16 points/common × 1 circuit) | CQM1-ID212 | UC, N, L, CE |
| | 32 points, 12 V DC (32 points/common) | CQM1-ID112 | U, C |
| | 32 points, 24 V DC (32 points/common) | CQM1-ID213 | U, C, N, L, CE |
| | 32 points, 24 V DC (32 points/common × 1 circuit) | CQM1-ID214 | U, C, CE |
| AC inputs | 8 points, 100 to 120 V AC (8 points/common) | CQM1-IA121 | U, C, L, CE |
| | 8 points, 200 to 240 V AC (8 points/common) | CQM1-IA221 | |

Output Units

| Output type | Specifications | Model | International standards |
|---------------------|---|------------|-------------------------|
| Contact outputs | 8 points, 250 V AC ($\cos\phi = 1.0/0.4$)/24 V DC 2 A (16 A/Unit), independent commons | CQM1-OC221 | U, C, N, L |
| | 16 points, 250 V AC ($\cos\phi = 1.0/0.4$)/24 V DC 2 A (8 A/Unit) | CQM1-OC222 | UC, N, L |
| | 8 points, 250 V AC 2 A ($\cos\phi = 1.0/0.4$)/24 V DC 2 A, independent common | CQM1-OC224 | CE |
| Transistor out-puts | 8 points, 24 V DC, 2A (5 A/Unit), 8 points/common | CQM1-OD211 | U, C, N, L, CE |
| | 16 points, 50 mA at 4.5 V DC to 300 mA at 26.4 V DC, 16 points/common | CQM1-OD212 | |
| | 32 points, 16 mA at 4.5 V DC to 100 mA at 26.4 V DC | CQM1-OD213 | |
| | 16 points, 24 V DC, 300 mA, PNP outputs | CQM1-OD214 | U, C, L, CE |
| | 8 points, 24 V DC, 1.0 A, PNP outputs (4 A/Unit), short-circuit protection | CQM1-OD215 | |
| | 32 points, 24 V DC, 0.5 A, PNP outputs (5 A/Unit), short-circuit protection | CQM1-OD216 | CE |
| AC outputs | 8 points, 0.4 A at 100 to 240 V AC, two circuits with 4 points/common each | CQM1-OA221 | U, C, L |
| | 6 points, 0.4 A at 100 to 240 V AC, two circuits with 4 points/common and 2 points/common | CQM1-OA222 | CE |

Dedicated I/O Units

| Name | Specifications | Model | International standards |
|---------------------------|---|---|-------------------------|
| Analog Input Unit | Analog inputs: 4 points | CQM1-AD042 | U, C, L, CE |
| Analog Output Unit | Analog outputs: 2 points | CQM1-DA022 | |
| B7A Interface Unit | 16 outputs | CQM1-B7A02 | --- |
| | 16 inputs | CQM1-B7A12 | U, C |
| | 32 outputs | CQM1-B7A03 | |
| | 32 inputs | CQM1-B7A13 | |
| | 16 inputs and 16 outputs | CQM1-B7A21 | --- |
| Temperature Control Units | Thermocouple input, transistor (NPN) output, 2 loops | CQM1-TC001 | U, C, CE |
| | Thermocouple input, transistor (PNP) output, 2 loops | CQM1-TC002 | |
| | Platinum resistance thermometer, transistor (NPN) output, 2 loops | CQM1-TC101 | |
| | Platinum resistance thermometer, transistor (PNP) output, 2 loops | CQM1-TC102 | |
| | Thermocouple input, transistor (NPN) output, 4 loops | CQN1-TC201 | U, C, CE |
| | Thermocouple input, transistor (PNP) output, 4 loops | CQN1-TC202 | U, C, CE |
| | Platinum resistance thermometer, transistor (NPN) output, 2 loops (with heater burnout alarm) | CQN1-TC203 | U, C, CE |
| | Platinum resistance thermometer, transistor (PNP) output, 2 loops (with heater burnout alarm) | CQN1-TC204 | U, C, CE |
| | Thermocouple input, transistor (NPN) output, 4 loops | CQN1-TC301 | U, C, CE |
| | Thermocouple input, transistor (PNP) output, 4 loops | CQN1-TC302 | U, C, CE |
| | Platinum resistance thermometer, transistor (NPN) output, 2 loops (with heater burnout alarm) | CQN1-TC303 | U, C, CE |
| | Platinum resistance thermometer, transistor (PNP) output, 2 loops (with heater burnout alarm) | CQN1-TC304 | U, C, CE |
| | Safety Relay Unit | Emergency stop unit: 2 inputs/2 outputs, 4 general-purpose inputs | CQM1-SF200 |

DIN Track

| Name | Specifications | Model | International standards |
|-----------------|--|----------------|-------------------------|
| Mounting Tracks | Track length: 50 cm | Height: 7.3 mm | L |
| | Track length: 1 m | | |
| | Track length: 1 m | Height: 16 mm | |
| End Plate | Fasten mounting brackets on both sides of the PLC to prevent it from sliding left or right. Two End Plates are provided with the CPU Unit. | PFP-M | |

Note: DIN rail products must be ordered in lots of ten.

Programming Devices and Accessories

Programming Consoles

| Name | Specifications | Model | International standards |
|----------------------------------|---|-------------------|-------------------------|
| Programming Consoles | 2-m Connecting Cable included (No other Connecting Cables required.) | CQM1H-PRO01-E | U, C, CE |
| | 2-m Connecting Cable included (compatible with C-series PLCs) The CS1W-CN114 peripheral port conversion cable must be purchased separately (see below). | CQM1-PRO01-E | U, C, N, CE |
| | Requires a separate Connecting Cable, The C200H-CN222 connecting cable, C200HS-CN222 connecting cable, or CS1W-CN114 peripheral port conversion cable must be purchased separately (see below). | C200H-PRO27-E | U, C, N, CE |
| | Connecting Cables | Cable length: 2 m | C200H-CN222 |
| | Cable length: 2 m (for CPUs complying with EC directives) | C200HS-CN222 | CE |
| Peripheral Port Conversion Cable | Connects the peripheral port on the CQM1H to a personal computer or Programming Console through a CQM1-CIF01/02 cable. | CS1W-CN114 | CE |

CX-Programmer (Windows)

| Name | Specifications | Model | International standards |
|-------------------------------|--|------------------|-------------------------|
| CX-Programmer (V1.2 or later) | CD-ROM, OS: Windows 95, 98, Me, NT4.0, 2000, or XP | WS02-CXPC1-E-V□□ | --- |

CX Protocol (Windows)

| Name | Specifications | Model | International standards |
|-------------|---|--------------|-------------------------|
| CX-Protocol | Protocol macro software OS: Windows 95, 98, Me, NT4.0, 2000, or XP | WS02-PSTC1-E | --- |

Support Software

| Product | Model | International standards |
|-----------------------|---------------|-------------------------|
| Expansion Memory Unit | CPM1-EMU01-V1 | --- |
| EEPROM (256 K) | EEROM-JD | --- |

Maintenance Products

| Product | Function | Model | International standards |
|-----------|---|-------------|-------------------------|
| Battery | Backs up memory in the CPU Unit. | CPM2A-BAT01 | --- |
| End Cover | Connects to the I/O Unit located on the extreme right | CQM1H-TER01 | U, C, CE |

Programming Device Connecting Cables

| Name | Specifications | Model | International standards |
|--|--|--------------|-------------------------|
| Connecting Cables (Peripheral port to Programming Device (computer)) | Connects to Programming Console or CQM1-CIF01/02. | CS1W-CN114 | CE |
| | Connects to a D-Sub 9-pin port of an IBM PC/AT or compatible computer. (Use together with the CS1W-CN114.) Length: 3.3 m | CQM1-CIF02 | U, C, N, L, CE |
| Connecting Cables (Peripheral port to RS-422) | Peripheral port to RS-422 conversion cable (length: 0.2 m) | CQM1H-CIF12 | U, C, CE |
| | D-Sub 9-pin computer cable (length: 2 m) | CS1W-CN226 | CE |
| | D-Sub 9-pin computer cable (length: 6 m) | CS1W-CN626 | CE |
| | D-Sub 9-pin receptacle (length: 0.1 m) | CS1W-CN118 | CE |
| Connecting Cables (RS-232C port to Programming Device (computer)) | D-Sub 9-pin computer cable (length: 2 m) | XW2Z-200S-V | --- |
| | D-Sub 9-pin computer cable (length: 2 m) (anti-static) | XW2Z-200S-CV | --- |
| | D-Sub 9-pin computer cable (length: 5 m) | XW2Z-500S-V | --- |
| | D-Sub 9-pin computer cable (length: 5 m) (anti-static) | XW2Z-500S-CV | --- |
| RS-422 Adapter | Converts peripheral port levels. | CQM1-CIF121 | U, C, CE |