

Safety Relay Unit G9SA

The G9SA Series Offers a Complete Line-up of Compact Units.

- Four kinds of 45-mm wide Units are available:
A 3-safety contact model, a 5-safety contact model, and models with 3 safety contacts and 2 OFF-delay safety contacts.
- Also available are 17.5-mm wide Expansion Units with 3 safety contacts and 3 OFF-delay safety contacts.
- Two hand controller (type III C, EN 574)
- Simple expansion connection.
- OFF-delay models have 15-step OFF-delay settings.
- Conforms to EN standards. (BG approval)
- Approved by UL and CSA.
- Both DIN track mounting and screw mounting are possible.
- Suitable for PNP OSSD outputs of safety sensors, F3SN, F3SH, F3S-B, F3S-TGR, F3SL



Ordering Information

Emergency-stop Units

| Main contacts | Auxiliary contact | Number of input channels | Rated voltage | Model | Category |
|---------------|-------------------|----------------------------------|------------------------------|----------|----------|
| 3PST-NO | SPST-NC | 1 channel or 2 channels possible | 24 VAC/VDC 100 to 240 VAC | G9SA-301 | 4 |
| 5PST-NO | SPST-NC | 1 channel or 2 channels possible | 24 VAC/VDC 100 to 240 VAC | G9SA-501 | |

Emergency-stop OFF-delay Units

| Main contacts | OFF-delay contacts | Auxiliary contact | Number of input channels | OFF-delay time | Rated voltage | Model | Category |
|---------------|--------------------|-------------------|----------------------------------|----------------|------------------------------|---------------|---|
| 3PST-NO | DPST-NO | SPST-NC | 1 channel or 2 channels possible | 7.5 s | 24 VAC/VDC 100 to 240 VAC | G9SA-321-T075 | Main contacts: 4 OFF-delay contacts: 3 |
| | | | | 15 s | 24 VAC/VDC 100 to 240 VAC | G9SA-321-T15 | |
| | | | | 30 s | 24 VAC/VDC 100 to 240 VAC | G9SA-321-T30 | |

Note: The following 15-step OFF-delay time settings are available:
 T075: 0.5, 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, and 7.5 s
 T15: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, and 15 s
 T30: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, and 30 s

Two-hand Controller

| Main contacts | Auxiliary contact | Number of input channels | Rated voltage | Model | Category |
|---------------|-------------------|--------------------------|------------------------------|------------|-----------------|
| 3PST-NO | SPST-NC | 2 channels | 24 VAC/VDC 100 to 240 VAC | G9SA-TH301 | 4 (IIIc, EN574) |

Expansion Unit

The Expansion Unit connects to a G9SA-301, G9SA-501, G9SA-

321, or G9SA-TH301.

| Main contacts | Auxiliary contact | Model | Category |
|---------------|-------------------|------------|----------|
| 3PST-NO | SPST-NC | G9SA-EX301 | 4 |

G9SA

Expansion Units with OFF-delay Outputs

The Expansion Unit connects to a G9SA-301, G9SA-501, G9SA-321, or G9SA-TH301.

| Main contact form | Auxiliary contact | OFF-delay time | Model | Category |
|-------------------|-------------------|----------------|-----------------|----------|
| 3PST-NO | SPST-NC | 7.5 s | G9SA-EX031-T075 | 3 |
| | | 15 s | G9SA-EX031-T15 | |
| | | 30 s | G9SA-EX031-T30 | |

Note: The following 15-step OFF-delay time settings are available:
 T075: 0.5, 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, and 7.5 s
 T15: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, and 15 s
 T30: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, and 30 s

Model Number Legend

G9SA--

1 2 3 4 5 6

1. Function

- None: Emergency stop
- EX: Expansion Unit
- TH: Two-hand Controller

2. Contact Configuration (Safety Output)

- 0: None
- 3: 3PST-NO
- 5: 5PST-NO

3. Contact Configuration (OFF-delay Output)

- 0: None
- 2: DPST-NO
- 3: 3PST-NO

4. Contact Configuration (Auxiliary Output)

- 0: None
- 1: SPST-NC

5. Input Configuration (for G9SA-301/501/321)

- None: 1-channel or 2-channel input possible

6. OFF-delay Time (Max. setting time)

- None: No OFF-delay
- T075: 7.5 seconds
- T15: 15 seconds
- T30: 30 seconds

Specifications

Ratings

Power Input

| Item | G9SA-301/TH301 | G9SA-501 | G9SA-321-T□ |
|----------------------------------|---|---|---|
| Power supply voltage | 24 VAC/VDC: 24 VAC, 50/60 Hz, or 24 VDC 100 to 240 VAC: 100 to 240 VAC, 50/60 Hz | | |
| Operating voltage range | 85% to 110% of rated power supply voltage | | |
| Power consumption (See note.) | 24 VAC/VDC: 1.8 VA/1.7 W max. 100 to 240 VAC: 9 VA max. | 24 VAC/VDC: 2.8 VA/2.6 W max. 100 to 240 VAC: 11 VA max. | 24 VAC/VDC: 3.5 VA/3.3 W max. 100 to 240 VAC: 12.5 VA max. |

Note: When an Expansion Unit is connected, the power consumption is increased by 2 VA/2 W max.

Inputs

| Item | G9SA-301/321-T□/TH301 | G9SA-501 |
|---------------------------|-----------------------|------------|
| Input current (See note.) | 40 mA max. | 60 mA max. |

Note: When an Expansion Unit is connected, the input current is increased by 30 mA max.

Contacts

| Item | G9SA-301/501/321-T□/TH301/EX301/EX031-T□ |
|---------------------|--|
| | Resistive load ($\cos \phi = 1$) |
| Rated load | 250 VAC, 5 A |
| Rated carry current | 5 A |

Characteristics

| Item | G9SA-301/TH301 | G9SA-501/321-T□ | G9SA-EX301/EX031-T□ |
|--|--|--|---------------------|
| Contact resistance (see note 1) | 100 mΩ | | |
| Operating time | 30 ms max. (not including bounce time) | | |
| Response time (see note 2) | 10 ms max. (not including bounce time) | | |
| Insulation resistance (see note 3) | 100 MΩ min. (at 500 VDC) | | |
| Dielectric strength | Between different outputs | 2,500 VAC, 50/60 Hz for 1 min | |
| | Between inputs and outputs | | |
| | Between power inputs and outputs | | |
| | Between power inputs and other inputs (only for 100 to 240-V models) | | |
| Vibration resistance | 10 to 55 Hz, 0.75-mm double amplitude | | |
| Shock resistance | Destruction | 300 m/s ² | |
| | Malfuction | 100 m/s ² | |
| Durability | Mechanical | 5,000,000 operations min. (at approx. 7,200 operations/hr) | |
| | Electrical | 100,000 operations min. (at approx. 1,800 operations/hr) | |
| Minimum permissible load (reference value) | 5 VDC, 1 mA | | |
| Ambient temperature | Operating: -25°C to 55°C (with no icing or condensation) Storage: -25°C to 85°C (with no icing or condensation) | | |
| Ambient humidity | Operating: 35% to 85% Storage: 35% to 85% | | |
| Terminal tightening torque | 0.98 N·m | | |
| Weight (see note 4) | Approx. 210 g | Approx. 270 g | Approx. 130 g |
| Approved standards | EN954-1, EN60204-1, EN574 (-TH301), UL508, CSA C22.2 No. 14 | | |
| EMC | EMI: EN55011 group 1 class A EMS: EN50082-2 group 1 | | |

Note: 1. The contact resistance was measured with 1 A at 5 VDC using the voltage-drop method.


2. The response time is the time it takes for the main contact to open after the input is turned OFF.

3. The insulation resistance was measured with 500 VDC at the same places that the dielectric strength was checked.



4. Weight shown is for 24-VAC/VDC type. For 100 to 240-VAC type, add approximately 20 g.

Application Examples

G9SA-301 (24 VAC/VDC) with 2-channel Limit Switch Input/Auto-reset

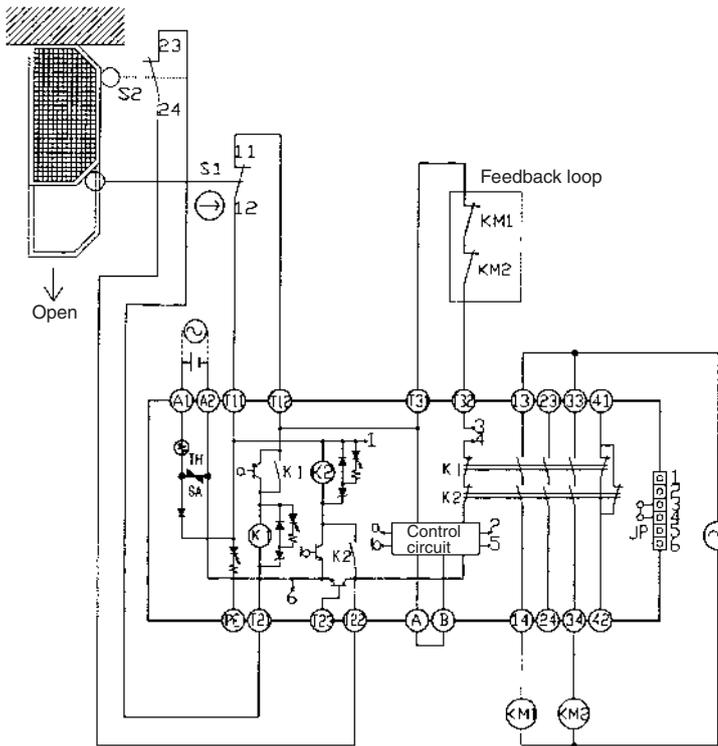

Timing Chart

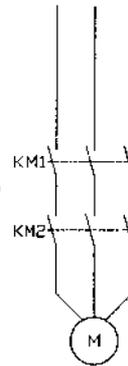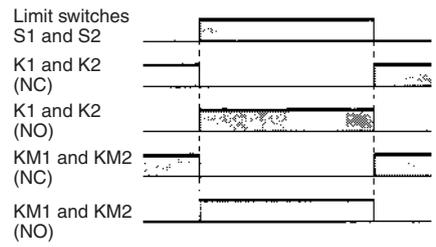

S1: Safety Limit Switch with direct opening mechanism (D4N or D4B)


S2: Limit switch

KM1 and KM2: Magnetic Contactor



M: 3-phase motor

Note: This circuit achieves EN954-1 Safety Category 4.

G9SA-301 (24 VAC/VDC) with 2-channel Limit Switch Input/Manual-reset

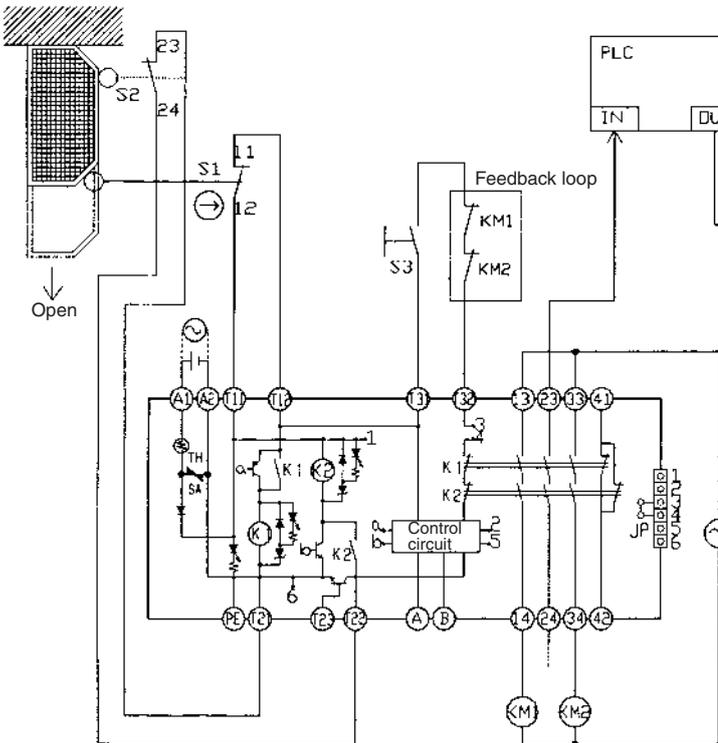

Timing Chart

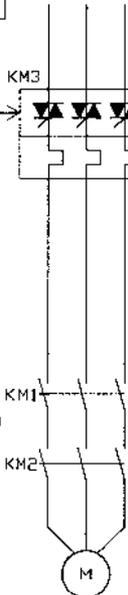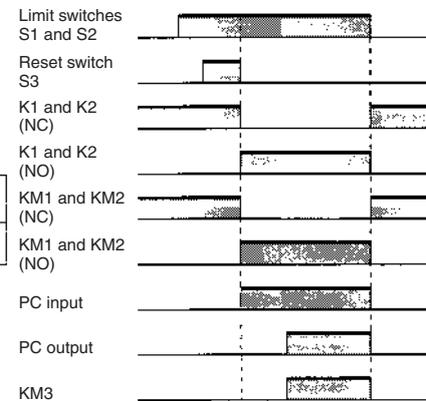

S1: Safety Limit Switch with direct opening mechanism (D4N or D4B)

S2: Limit switch

S3: Reset switch


KM1 and KM2: Magnetic Contactor

KM3: Solid-state Contactor


M: 3-phase motor

Note: This circuit achieves EN954-1 Safety Category 4.

G9SA-301 (100 to 240 VAC) with 2-channel Limit Switch Input/Auto-reset

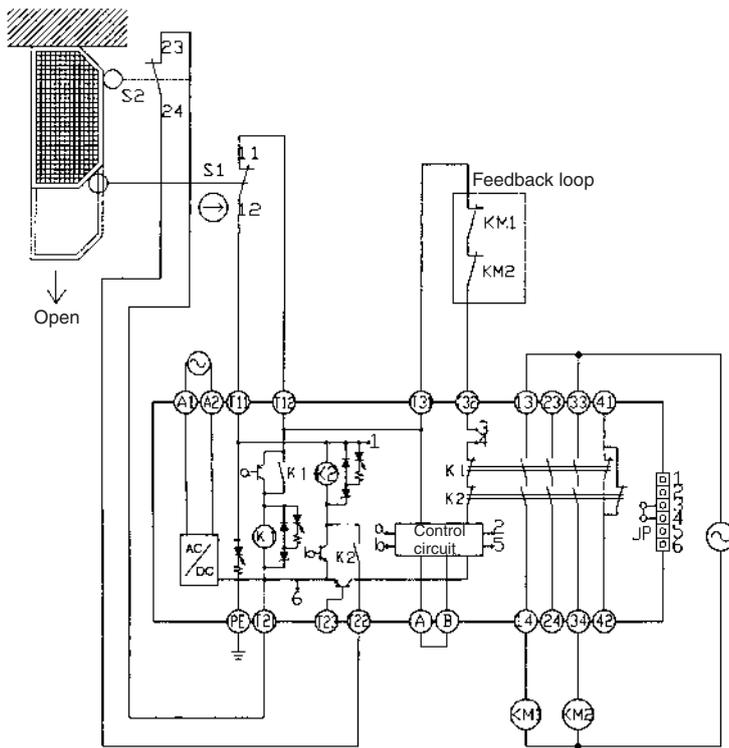


Timing Chart

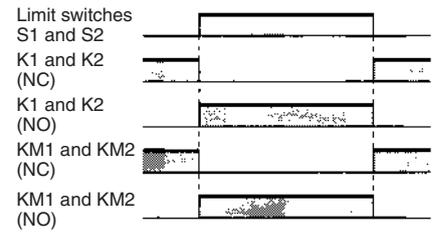


- S1: Safety Limit Switch with direct opening mechanism (D4N or D4B) ⚡
- S2: Limit switch
- KM1 and KM2: Magnetic Contactor
- M: 3-phase motor

Note: This circuit achieves EN954-1 Safety Category 4.

G9SA-301 (24 VAC/VDC) with 2-channel Emergency Stop Switch Input/Manual-reset

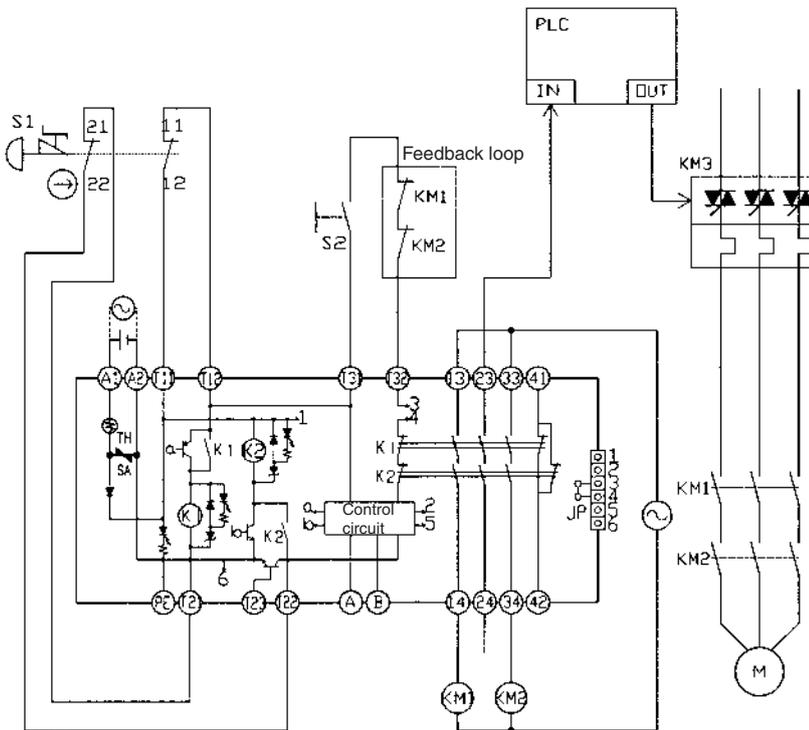

Timing Chart

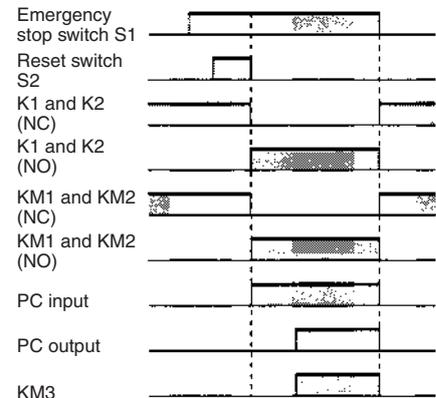


- S1: Emergency stop switch with direct opening mechanism (A165E or A22E) ⚡
- S2: Reset switch
- KM1 and KM2: Magnetic Contactor
- KM3: Solid-state Contactor
- M: 3-phase motor

Note: This circuit achieves EN954-1 Safety Category 4.



G9SA

G9SA-321-T□ (24 VAC/VDC) with 2-channel Limit Switch Input/Manual-reset

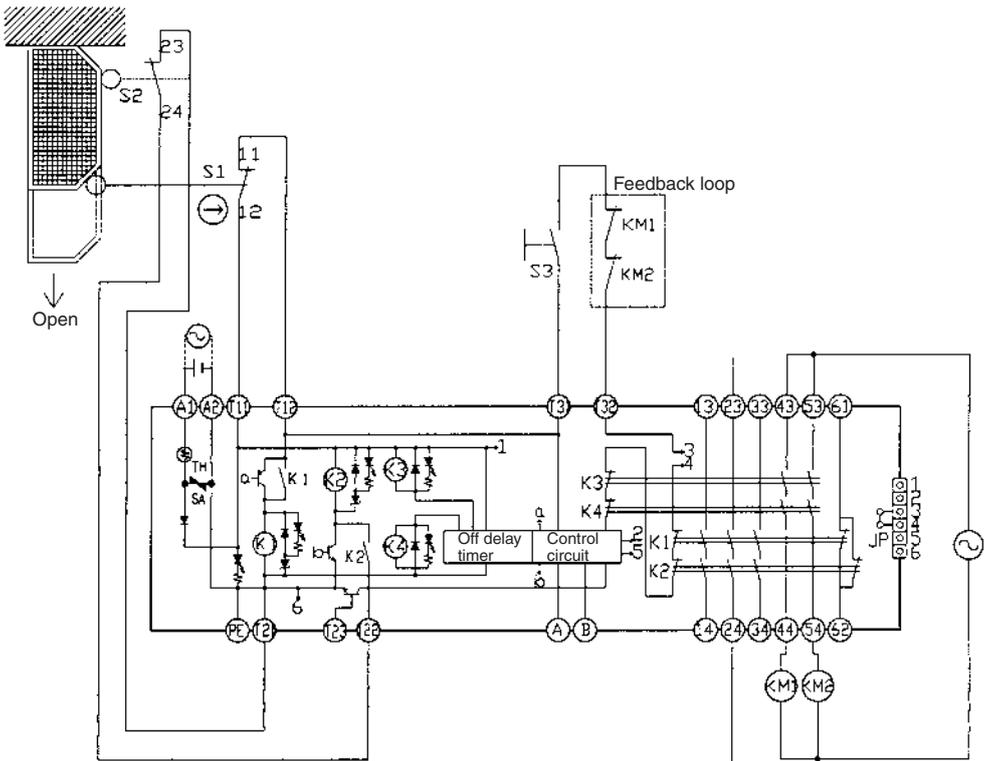


- S1: Safety Limit Switch with direct opening mechanism (D4N or D4B)
- S2: Limit switch
- S3: Reset switch
- KM1 and KM2: Magnetic Contactor
- M: 3-phase motor

Timing Chart

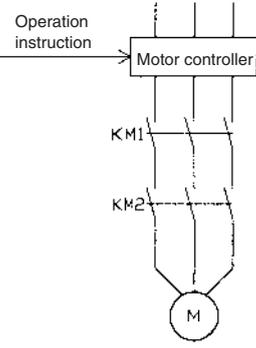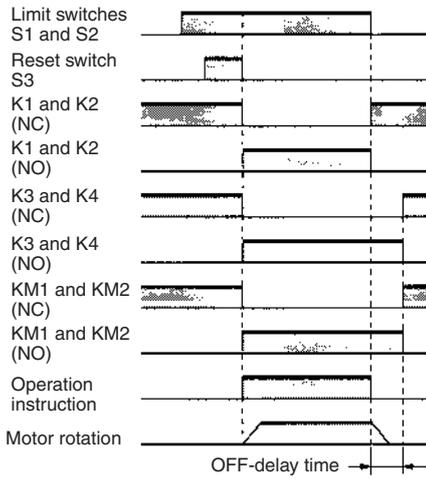



Note: This circuit achieves EN954-1 Safety Category 4. The OFF-delay output, however, achieves EN954-1 Safety Category 3.

G9SA-321-T□ (24 VAC/VDC) + G9SA-EX031-T□ with 2-channel Limit Switch Input/Manual-reset

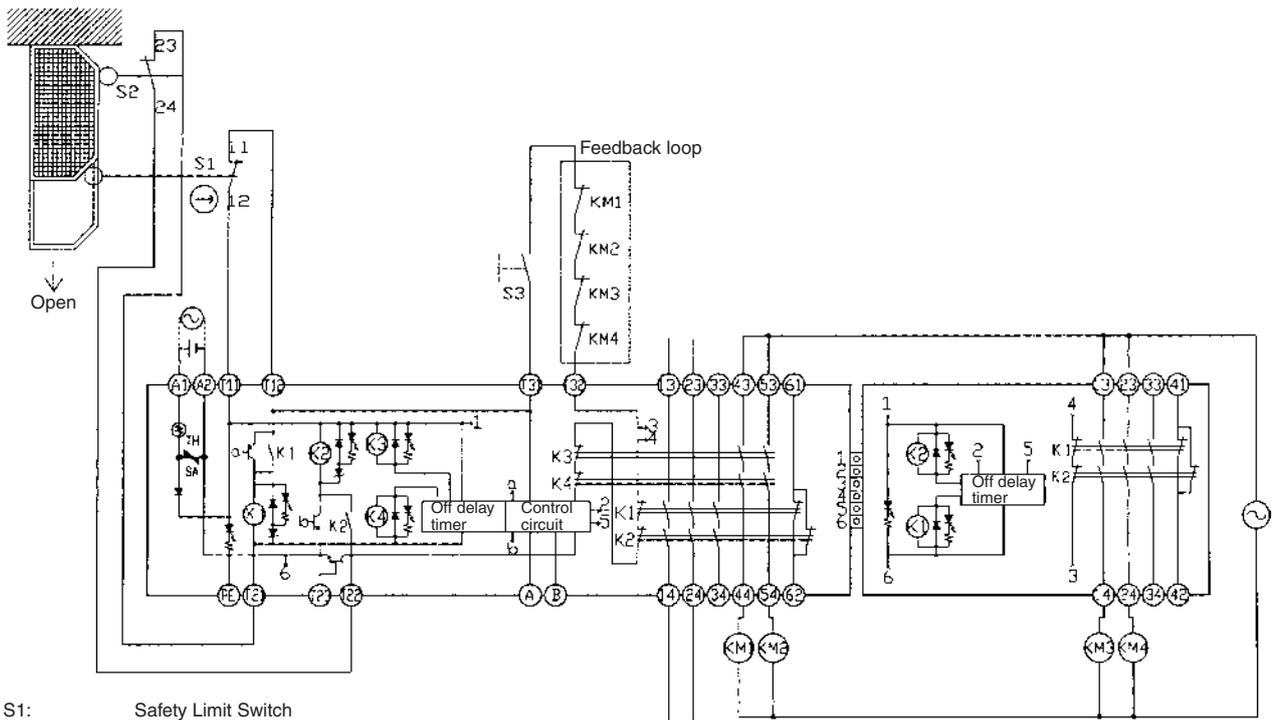


- S1: Safety Limit Switch with direct opening mechanism (D4N or D4B)
- S2: Limit switch
- S3: Reset switch
- KM1, KM2, KM3, and KM4: Magnetic Contactor
- M1, M2: 3-phase motor

Timing Chart

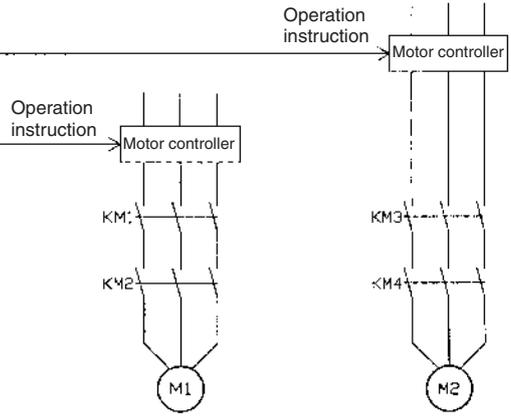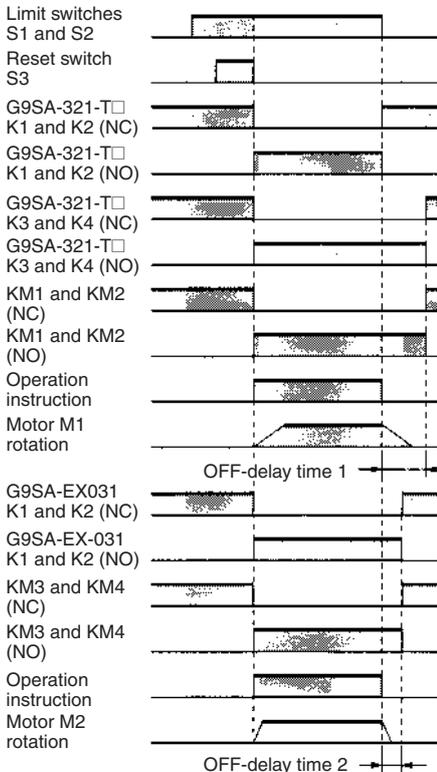

Note: This circuit achieves EN954-1 Safety Category 4. The OFF-delay output, however, achieves EN954-1 Safety Category 3.

G9SA-301 (24 VAC/VDC) with 2-channel Safety Area Sensor/Manual-reset

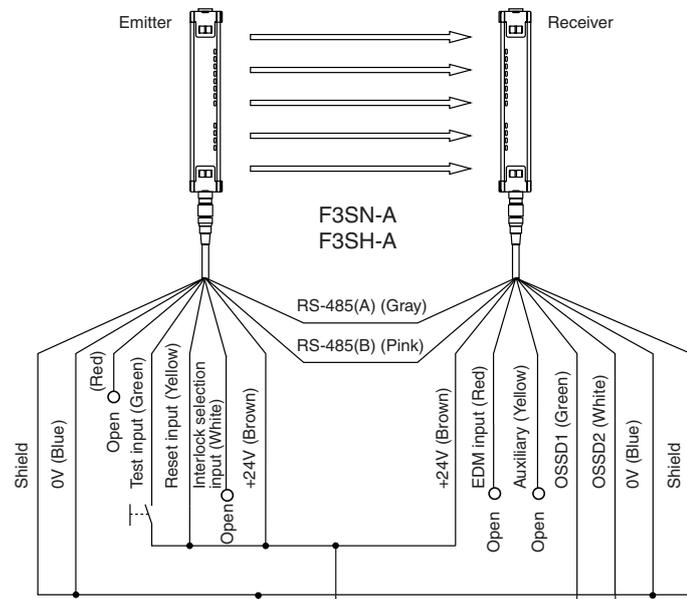


Timing Chart




- F3SN-A: Safety area sensor
- S1: Reset switch
- KM1 and KM2: Magnetic Contactor
- KM3: Solid-state Contactor
- M: 3-phase motor
- E1: 24-VDC Power Supply


Note: This circuit achieves EN954-1 Safety Category 4.

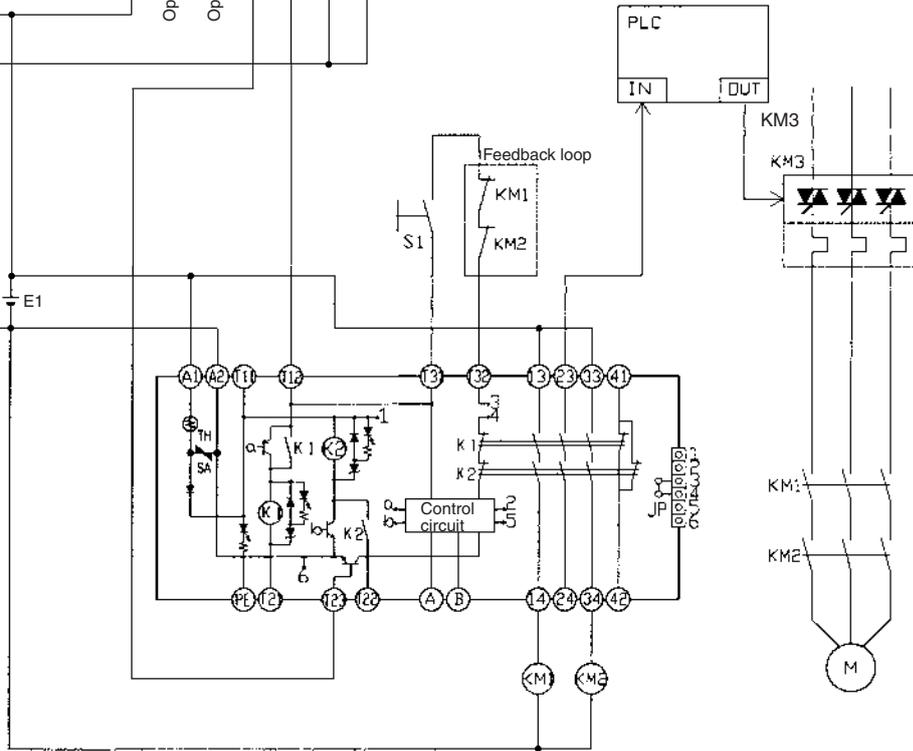

G9SA-TH301 (24 VDC) with 2-hand Inputs/Auto-reset

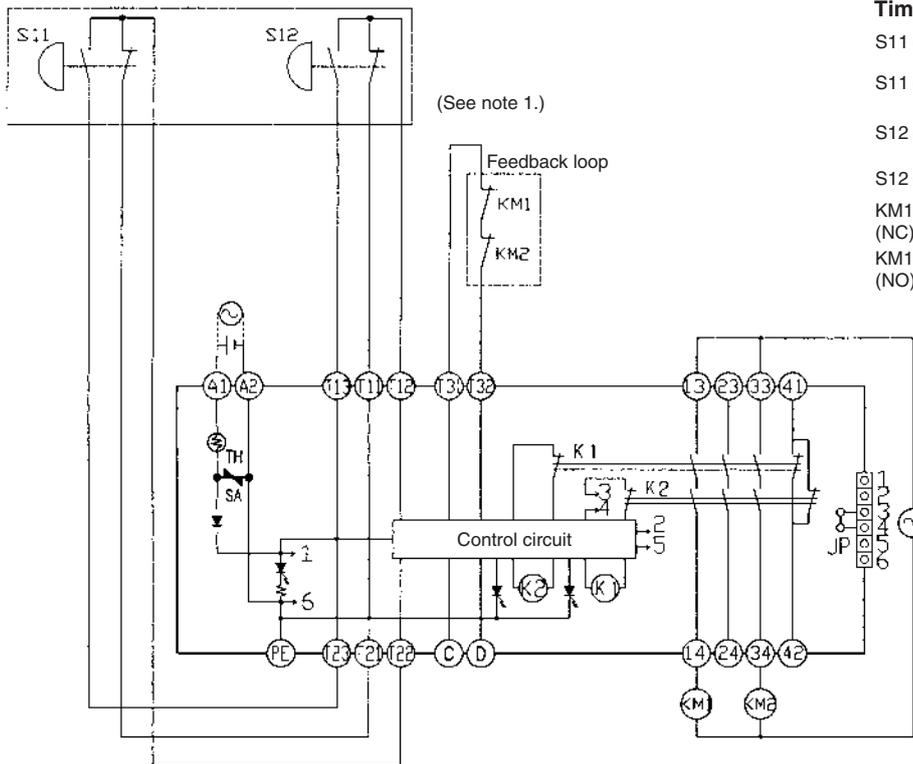

Timing Chart

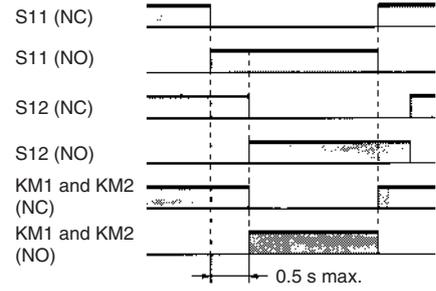


Input time difference operates only when the difference is 0.5 s max.

S11, S12: Two-hand pushbutton switches
 KM1 and KM2: Magnetic Contactor



- Note:** 1. Use a 1NC+1NO switch for S11 and S12.
 2. This circuit achieves EN954-1 Safety Category 4. Typ III C (EN 574)

G9SA-501 (24 VAC/VDC) and G9SA-EX301 with 2-channel Limit Switch Input/Manual-reset

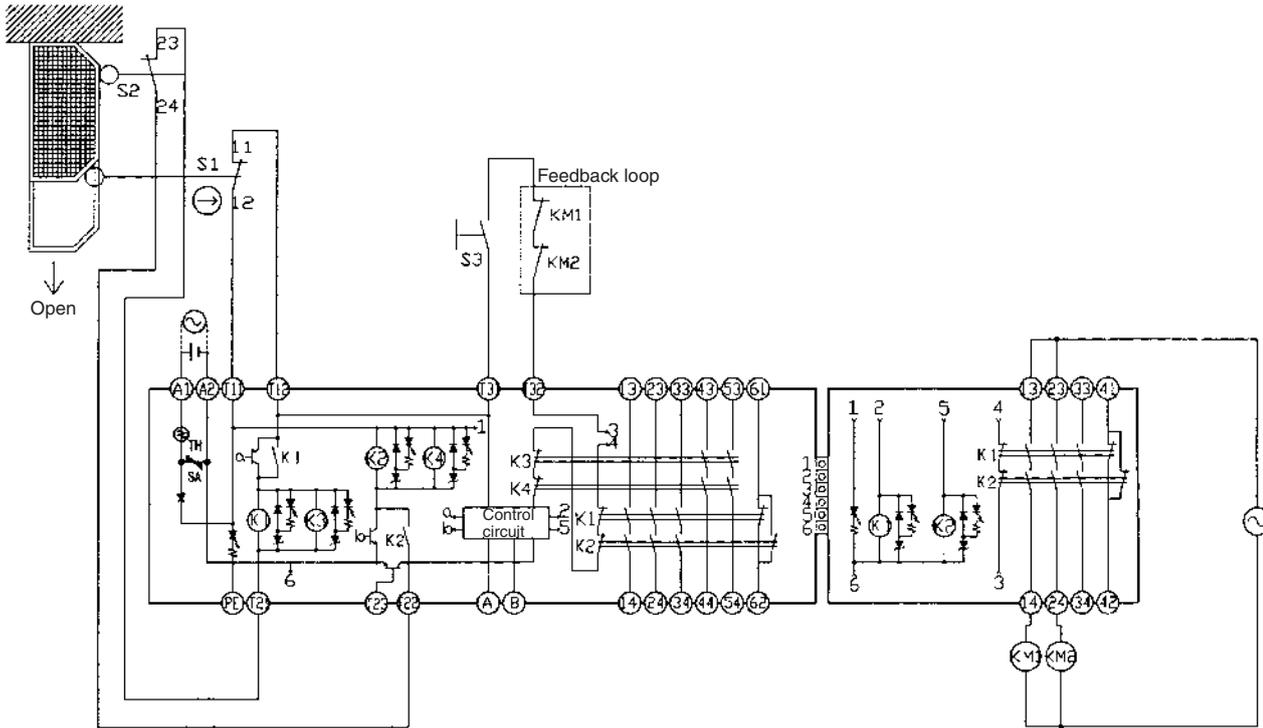

- S1: Safety Limit Switch with direct opening mechanism (D4N or D4B) 
- S2: Limit switch
- S3: Reset switch
- KM1 and KM2: Magnetic Contactor
- M: 3-phase motor

Timing Chart

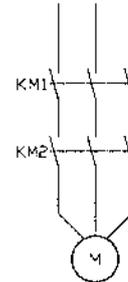
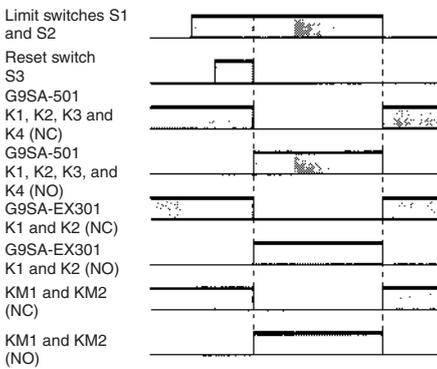


Note: This circuit achieves EN954-1 Safety Category 4.

Dimensions


Note: All units are in millimeters unless otherwise indicated. The diagrams are drawn in perspective.

G9SA-301
G9SA-501
G9SA-321-T□
G9SA-TH301

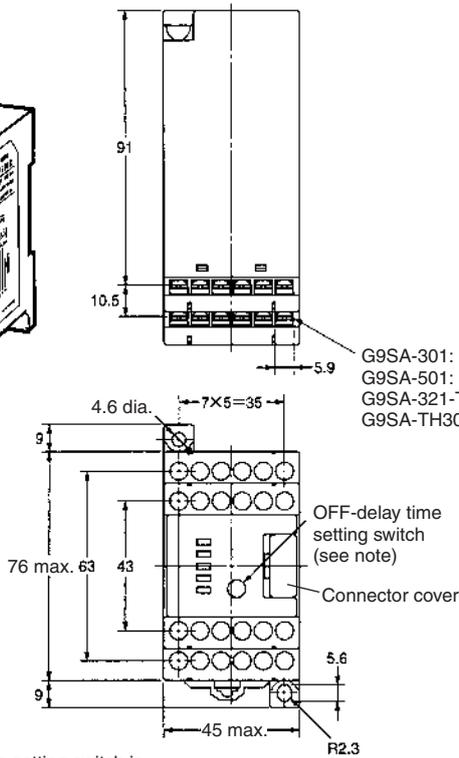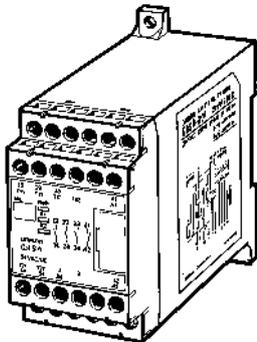


G9SA-301: Twenty, M3
G9SA-501: Twenty-four, M3
G9SA-321-T□: Twenty-four, M3
G9SA-TH301: Twenty-one, M3

Terminal Arrangement

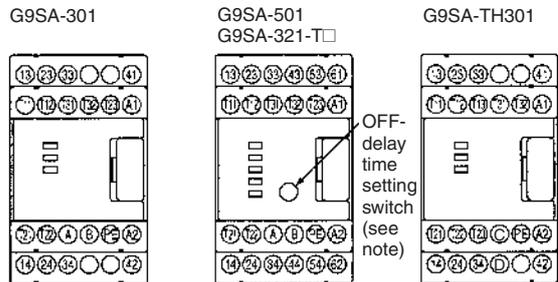



Mounting Holes

Two, 4.2 dia. or M4

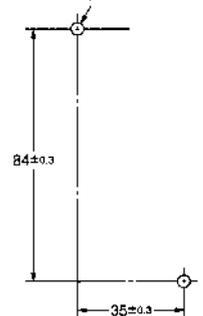


Note: The OFF-delay time setting switch is found on the G9SA-321-T□ only.

G9SA-EX301
G9SA-EX031-T□

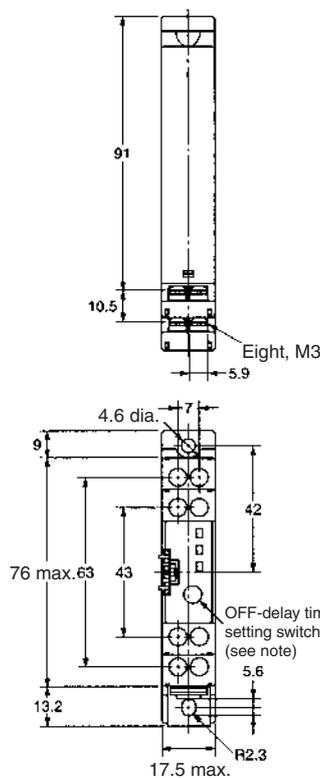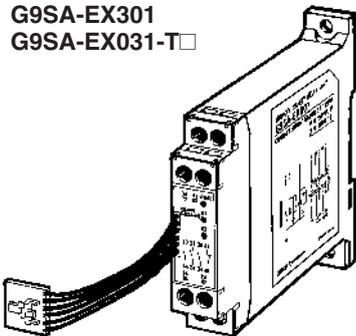


Mounting Holes

Two, 4.2 dia. or M4



Terminal Arrangement

G9SA-EX301
G9SA-EX031-T□



Note: The OFF-delay time setting switch is found on the G9SA-EX031-T□ only.

Precautions

Do not touch the terminal area of the Relays or the socket terminal area (charged area) while power is ON. Electric shock will result.

Wiring

Turn OFF the G9SA before wiring the G9SA. Do not touch the terminals of the G9SA while the power is turned ON, because the terminals are charged and may cause an electric shock.

Use the following to wire the G9SA.

Stranded wire: 0.75 to 1.5 mm²

Solid wire: 1.0 to 1.5 mm²

Tighten each screw to a torque of 0.78 to 1.18 N·m, or the G9SA may malfunction or generate heat.

External inputs connected to T11 and T12 or T21 and T22 of the G9SA-301 must be no-voltage contact inputs.

PE is a ground terminal.

When a machine is grounded at the positive, the PE terminal should not be grounded.

Mounting Expansion Units

Turn OFF the G9SA before connecting the Expansion Unit.

When an Expansion Unit is being used, remove the connector cover from the G9SA Safety Relay Unit (G9SA-301, G9SA-501, G9SA-321□, or G9SA-TH301) and insert the connector of the Expansion Unit's connector cable.

Applicable Safety Category (EN954-1)

G9SA-series Relays meet the requirements of Safety Category 4 of the EN954-1 standards when they are used as shown in the examples provided by OMRON. The Relays may not meet the standards in some operating conditions. The OFF-delay output of models G9SA-321-T□ and EX031-T□, however, conform to Safety Category 3.


The applicable safety category is determined from the whole safety control system. Make sure that the whole safety control system meets EN954-1 requirements.

Mounting Multiple Units

When mounting multiple Units close to each other, the rated current will be 3 A. Do not apply a current higher than 3 A.

Connecting Inputs

If using multiple G9SA models, inputs cannot be made using the same switch. This is also true for other input terminals.



Earth Short

A positive thermistor is built into the G9SA circuits, so you can detect earth short breakdowns and breakdown shorts between channel 1 and channel 2. If the short breakdown is canceled, reset is automatic.