

# SX

## High performance Vector Control


- IP54 full range.
- Compact design & Robustness
- Built-in Filter according to C3 Class
- Built-in Fuses (From 200 kW)
- Safety according EN13849-1 and EN62061 standards
- Load curve control
- HCB technology (Half controlling Bridge)
- Logic programmability
- Pre-maintenance alarms
- Options flexibility (I/O's, Fieldbus, PTC/PT100, Multiple Pump control, Encoder, Crane control)
- Communications options (Modbus, Dnet, Profibus)
- 24 VDC control board supply
- Liquid cooling drive version
- 12-pulse rectifier option.
- Flexible cable connections & User Friendly wiring connection
- CE, UL, RoHS, DNV

## Ratings

- 400 V Class three-phase 90 to 800 kW
- 690 V Class three-phase 90 to 1000 kW




## System configuration

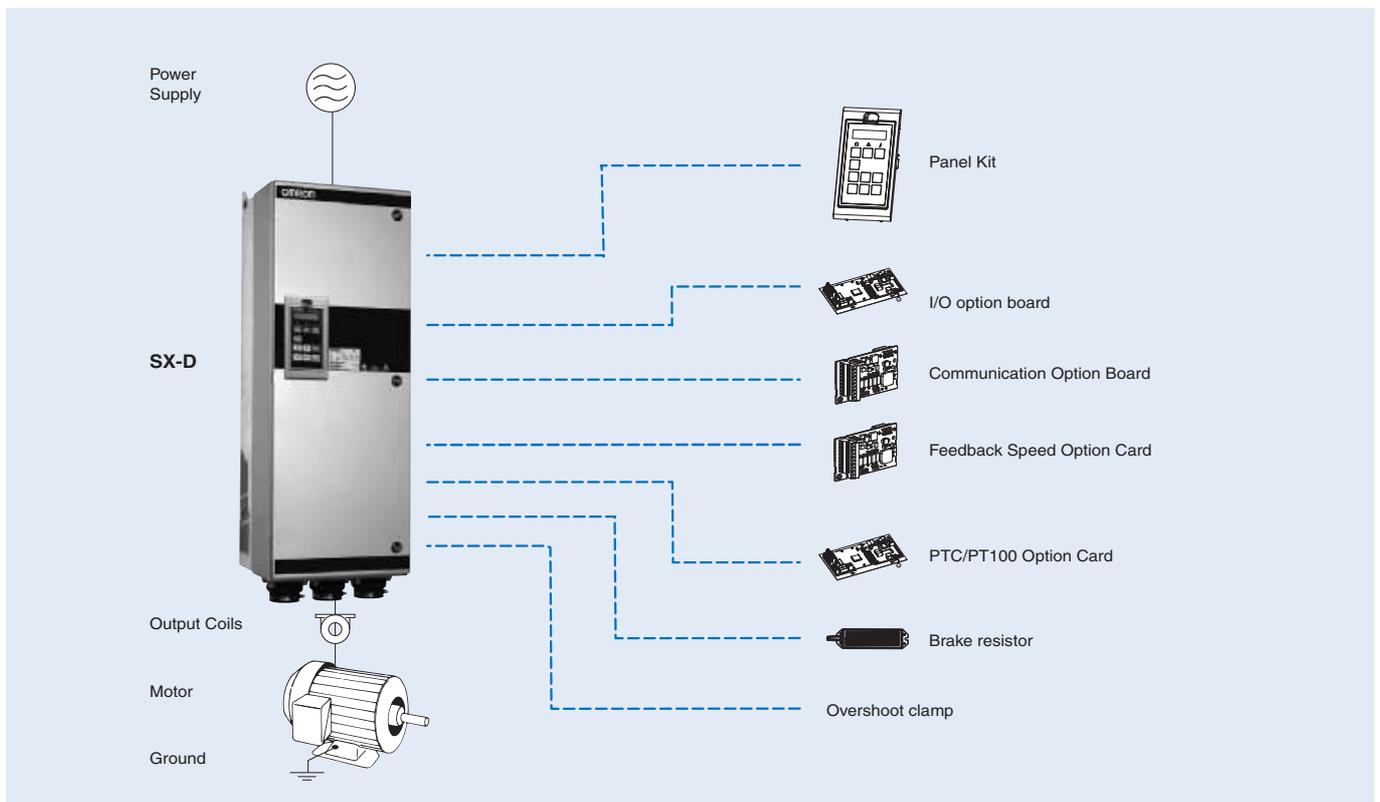

Specifications

Type designation

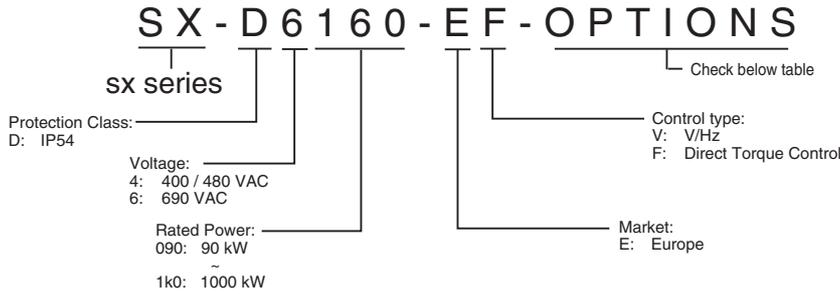

Options available

Options	Letter ("?" means no character)	Options	Letter ("?" means no character)
Control panel	"?" = Standard control panel (Std.PPU) "A" = Blank control panel (Blank PPU)	Option board position 2	"?" = No option "I" = Encoder "J" = PTC/PT100 "K" = Extended I/O"
Built-in EMC filter	"?" = Standard EMC inside (Category C3) "B" = IT-Net (filter disconnected from ground)	Option board position 3	"?" = No option "I" = Encoder "J" = PTC/PT100 "K" = Extended I/O"
Built-in brake chopper	"?" = No brake chopper or DC-connection included "C" = Brake chopper & DC-connection included "D" = Only DC-connection included	Option board Fieldbus position 4	"?" = No option "L" = DeviceNet "M" = Profibus-DP "N" = RS232/485 "O" = EtherNet Modbus TCP
Standby power supply	"?" = Not included "E" = Standby power supply included	Liquid Cooling	"?" = No Liquid Cooling "P" = Liquid Cooling
Safe stop	"?" = Not included "F" = Safe stop included	Standard	"?" = IEC "Q" = UL
Control type	"V"=V/Hz "F"=Direct Torque Control	Marine	"?" = No marine option "R" = Marine option included
Coated boards	"?" = No coating "G" = Coated boards	Cabinet input options	"?" = No cabinet input options "S" = Main switch included "T" = Main contactor included "U" = Main switch + contactor included
Option board position 1	"?" = No option "H" = Crane I/O "I" = Encoder "J" = PTC/PT100 "K" = Extended I/O"	Cabinet output options	"?" = No cabinet output options included "V" = dU/dt filter included "W" = dU/dt filter + Overshoot clamp included "X" = Sinusfilter included

400 V class

Three-phase: SX-D4□□-EF		090	110	132	160	200	220	250	315	355	400	450	500	630	800	
Motor kW <sup>1</sup>	For HD setting	75	90	110	132	160	200	220	250	315	355	400	450	500	630	800
	For ND setting	90	110	132	160	200	220	250	315	355	400	450	500	630	800	
Output characteristics	Max output current (A)	210	252	300	360	450	516	600	720	780	900	1032	1200	1440	1800	
	Rated output current (A) at HD	140	168	200	240	300	344	400	480	520	600	688	800	960	1200	
	Rated output current (A) at ND	175	210	250	300	375	430	500	600	650	750	860	1000	1200	1500	
	Output voltage	0 to Mains supply voltage														
	Max. output frequency	400 Hz														
Power supply	Rated input voltage and frequency	3-phase 230..480 V 50/60 Hz														
	Allowable voltage fluctuation	+10%..-15% (-10% at 230V)														
	Allowable frequency	45 to 65 Hz														

1. Based on a standard 4-pole motor for maximum applicable motor output

600 V class

Three-phase: SX-D6□□-EF		090	110	132	160	200	250	315	355	450	500	600	630	710	800	900	1K0	
Motor kW	For HD setting	75	90	110	132	160	200	250	315	315	355	450	500	600	650	710	800	
	For ND setting	90	110	132	160	200	250	315	355	450	500	600	630	710	800	900	1000	
Output characteristics	Max output current (A)	108	131	175	210	252	300	360	450	516	600	720	780	900	1032	1080	1200	
	Rated output current (A) at HD	72	87	117	140	168	200	240	300	344	400	480	520	600	688	720	800	
	Rated output current (A) at ND	90	109	146	175	210	250	300	375	430	500	600	650	750	860	900	1000	
	Output voltage	0 to Mains supply voltage																
	Max. output frequency	400 Hz																
Power supply	Rated input voltage and frequency	3-phase 500..690V, 50/60 Hz																
	Allowable voltage fluctuation	+10%..-15%																
	Allowable frequency fluctuation	45 to 65 Hz																

Specifications


Common specifications

Model number SX-	Specifications	
Control functions	<b>Control methods</b>	V/f control for "V" type V/f control, Vector control with or without feedback for the "F" type
	<b>Output frequency range</b>	0.0..400 Hz
	<b>Frequency tolerance</b>	Analogue set value: 1% + 1.5 LSB fsd
	<b>Resolution of frequency set value</b>	Digital set value: 0.1 Hz Analogue set value: 0.03 Hz / 60 Hz (11 bit + sign)
	<b>Resolution of output frequency</b>	0.1 Hz
	<b>Frequency set value</b>	-10..+10 V (20 kΩ), 0..20 mA (250 Ω), frequency setting value (selectable)
	<b>Starting Torque</b>	150% for Heavy duty, 120% for Normal duty
	<b>Torque static accuracy</b>	<3% in Vector control with feedback <3% in vector control without feedback if speed between 10 and 100%, <10% at 0 Hz
	<b>Torque response</b>	1 ms for 0 - 90% speed 5 ms for 90 - 100% speed (Close and open loop)
	<b>Speed Control Accuracy</b>	V/f control 1% Vector control without feedback 0.1% Vector control with feedback 0.01%
	<b>Speed Response</b>	0.4% without encoder feedback 0.2% with encoder feedback
	<b>Torque Limit</b>	From Analog input
	<b>Accel/Decel Time</b>	0.0 to 3600.0 s
	<b>Braking torque</b>	5 - 10% (100% with external braking resistor)
Functionality	<b>Main Control Functions</b>	PID, sleep function, brake control, torque control (Direct torque control model), Pump/Fan control, Logic functions, virtual connections, overvoltage control, undervoltage override, autoreset, two motor support, Lim Switch, External trip, Preset Speeds, MotPot Up Down, Pump Feedback, Timer, Mot PreMag , Jog, Ext Mot Temp, Loc/Rem, AnIn select, Brk Ackn.
Protection functions	<b>Motor protection</b>	Motor overheat protection based on output current or PTC by option board
	<b>Momentary overcurrent Protection</b>	Drive stops when output current exceeds 200% of peak current
	<b>Overload Protection</b>	Drive stops after 1 min at 150% of rated output current (Heavy Duty Rating) Drive stops after 1 min at 120% of rated output current (Normal Duty Rating) (1min every 10min)
	<b>Overvoltage Protection</b>	Line Overvoltage: 760 VDC during more than 10s for 400 V class; 1120 VDC during more than 10 s for 690 V class Fast Overvoltage: 850 VDC for 400 V class; 1220 for 690 VDC
	<b>Undervoltage Protection</b>	400 VDC for 400 V class; 500 for 690 V class (Adjustable by input power supply parameter)
	<b>Momentary power loss Ride-Thru</b>	Low voltage override function
	<b>Heatsink Overheat Protection</b>	Protected by thermister
	<b>Braking Resistance Overheat Protection</b>	Hardware short circuit protection
	<b>Stall prevention</b>	Current limit function
	<b>Power charge indication</b>	Power LED remains lit until capacitors are charged
Ambient conditions	<b>Ambient Temperature</b>	0°C..+40°C, up to 45°C with derating
	<b>Ambient humidity</b>	90% RH or less (without condensation)
	<b>Storage temperature</b>	-20°C..+60°C (short-term temperature during transportation)
	<b>Altitude</b>	Up to 1000 meters (output derating of 1% per 100 m above 1000 m, max. 2000 m)
	<b>Vibration / Shock</b>	According to IEC 600068-2-6, Sinusoidal vibrations: 10<f<57 Hz, 0.075 mm, 57<f<150 Hz, 1g
	<b>Contamination, according to IEC 60721-3-3</b>	No electrically conductive dust allowed. Cooling air must be clean and free from corrosive materials. Chemical gases, class 3C2. Solid particles, class 3S2
	<b>Protection Design</b>	IP54 enclosure according to the EN 60529


Dimensions

Standard dimensions


SX-4090

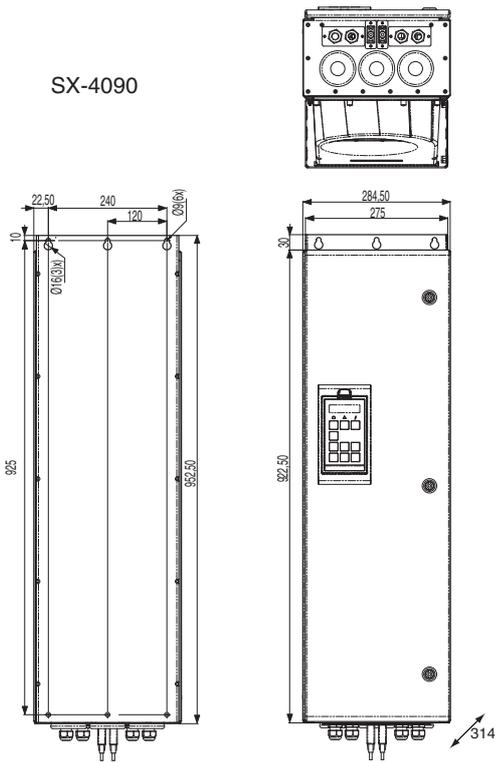


SX-4110 to 4132  
SX-6090 to 6160

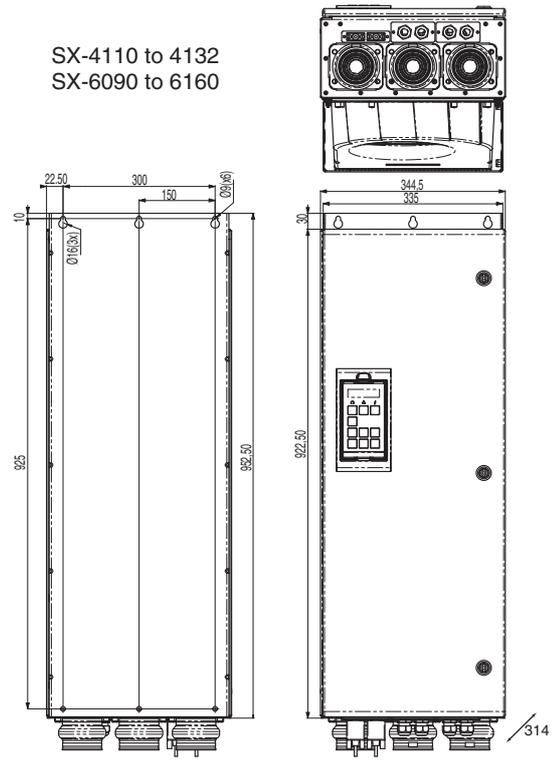

SX-4160 to 4250  
SX-6200 to 6355

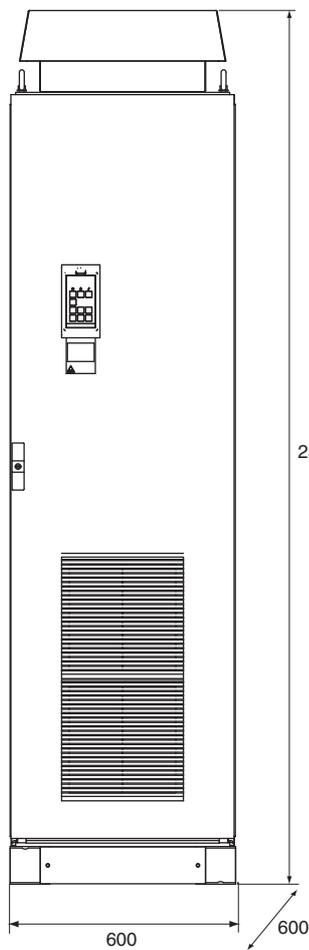


SX-4315 to 4400  
SX-6450 to 6500

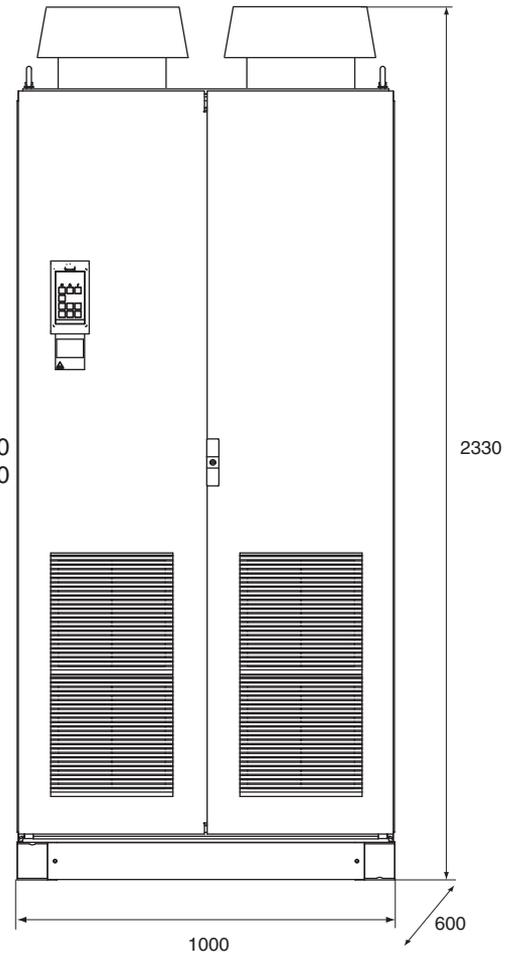

SX-4450 to 4500  
SX-6600 to 6630



SX-4630 to 4800  
SX-6710 to 61K0

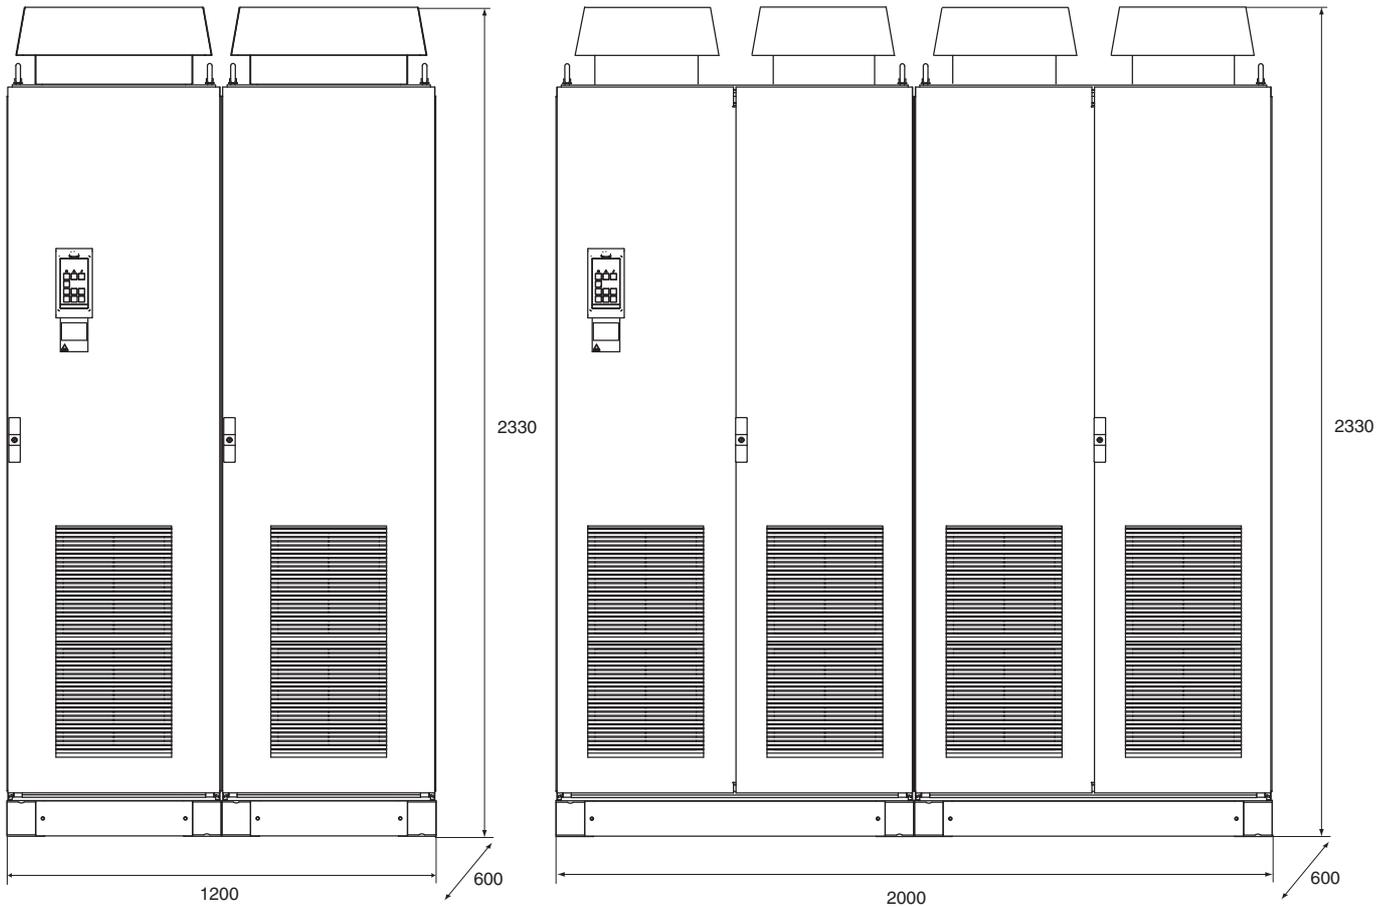

LCD operator



## Output coils

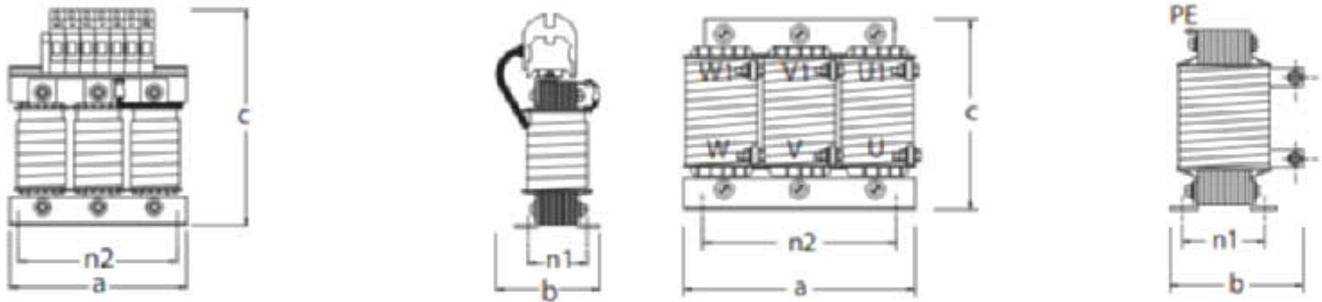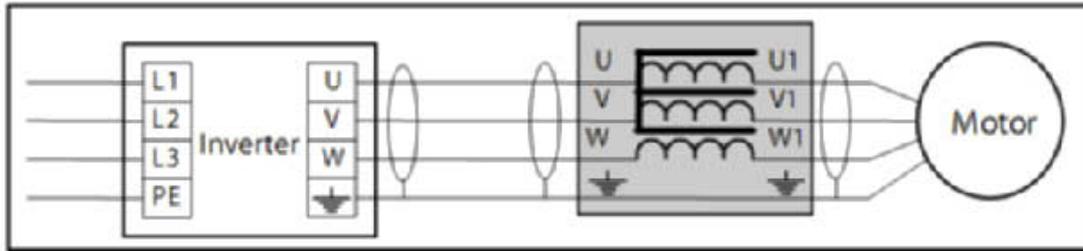


Type	Fig	a	b	c	n2	n1	Fix	Weight	Connection
473169 00	1	190	120	235	170	66	M6	8.4 kg	35 mm <sup>2</sup>
473170 00		190	140	260	170	77	M6	10.2 kg	35 mm <sup>2</sup>
473171 00	2	210	160	180	175	97	M6	13.4 kg	M10
473172 00		230	170	200	175	95	M6	18.4 kg	M10

## Specifications

Model	Rated current	Inductance	Rated voltage	Max carrier	Max output voltage	Max temp
473169 00	90A	0.1 mH	800V	6 kHz	200Hz	40°C
473170 00	146A	0.05 mH			100Hz	
473171 00	175A	0.05 mH		1.5 kHz	100Hz	
473172 00	275A	0.032 mH				

Installation

Standard connections

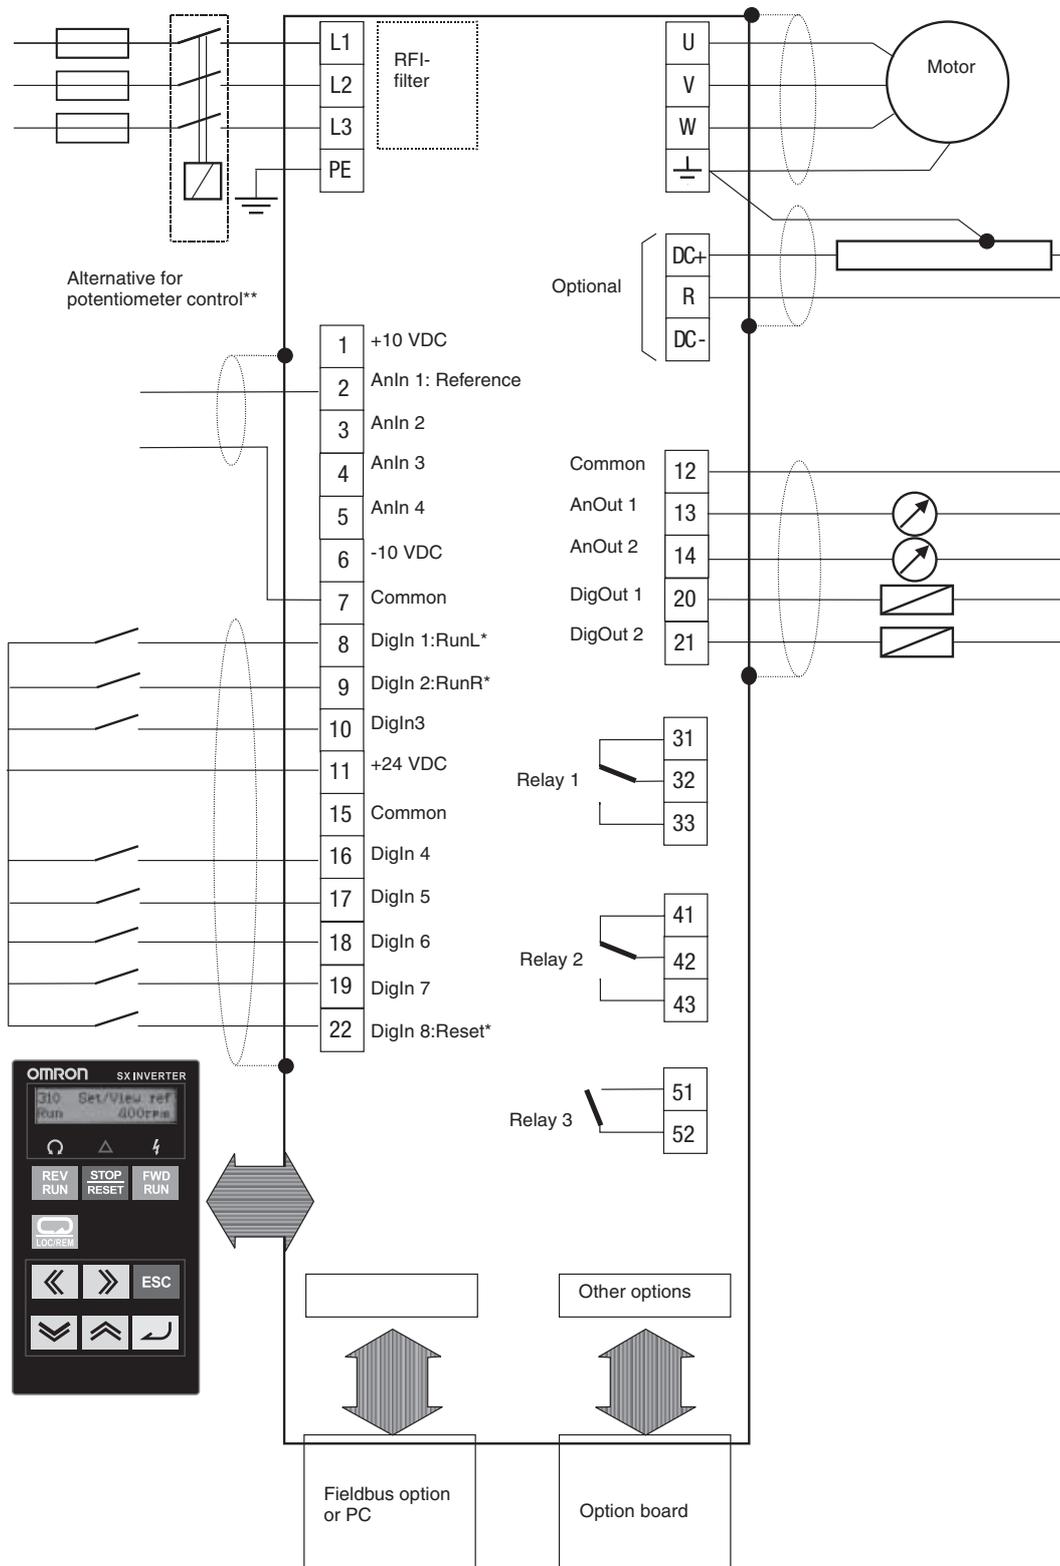

NG\_06-F27


Main circuit

Terminal	Name	Function (signal level)
L1, L2, L3	Main circuit power supply input	Used to connect line power to the drive.
U, V, W	Inverter output	Used to connect the motor
DC-, DC+, R	DC link connections, Brake resistor	The brake resistor must be connected terminals DC+ and R (Terminals are only fitted if the Brake Chopper Option is built-in)
PE	Safety earth	Protected earth
⊕	Grounding	Motor earth

Control Circuit

Type	No.	Signal name	Function	Signal level	
Digital input signals	8	DigIn 1	RunL (reverse)	High > 9 VDC Low < 4 VDC Max 30 VDC Impedance 4.7 kΩ for < 3.3 VDC 3.6 kΩ for > 3.3 VDC	
	9	DigIn 2	RunR (forward)		
	10	DigIn 3	Off		
	16	DigIn 4	Off		
	17	DigIn 5	Off		
	18	DigIn 6	Off		
	19	DigIn 7	Off		
	22	DigIn 8	RESET		
	11	+24 V	+24 VDC supply voltage	Max 100mA	
	15	Common	Signal ground		
Analog input signals	1	+10 V	+10 VDC supply voltage	-10 to 10 VDC 0 to 20mA Max 30V/30mA Impedance 20 kΩ Voltage 250 Ω Current	
	2	AnIn 1	Process Ref		
	3	AnIn 2	Off		
	4	AnIn 3	Off		
	5	AnIn 4	Off		
	6	-10 V	-10 VDC supply voltage		
	7	Common	Signal ground		
Digital output signals	20	DigOut 1	Ready	High > 20VDC @50mA > 23VDC open Low <1 VDC @ 50mA 100 mA max together with +24VDC	
	21	DigOut 2	Brake		
	12	Common	Signal ground		
	31	N/C 1	Relay 1 output Trip, active when the VSD is in a TRIP condition.	0.1 to 2A 250 VAC or 42 VDC	
	32	COM 1			
	33	N/O 1			
	41	N/C 2	Relay 2 output Run, active when the VSD is started.		
	42	COM 2			
	43	N/O 2			
	51	COM 3	Relay 3 output Off		
52	N/O 3				
Analog output signals	12	Common	Signal ground		0 - 10V / 0 - 20mA Max -15V @ 5mA Impedance: 10 Ω (Voltage)
	13	AnOut1	Min speed to max speed		
	14	AnOut2	0 to max torque		

Ordering information

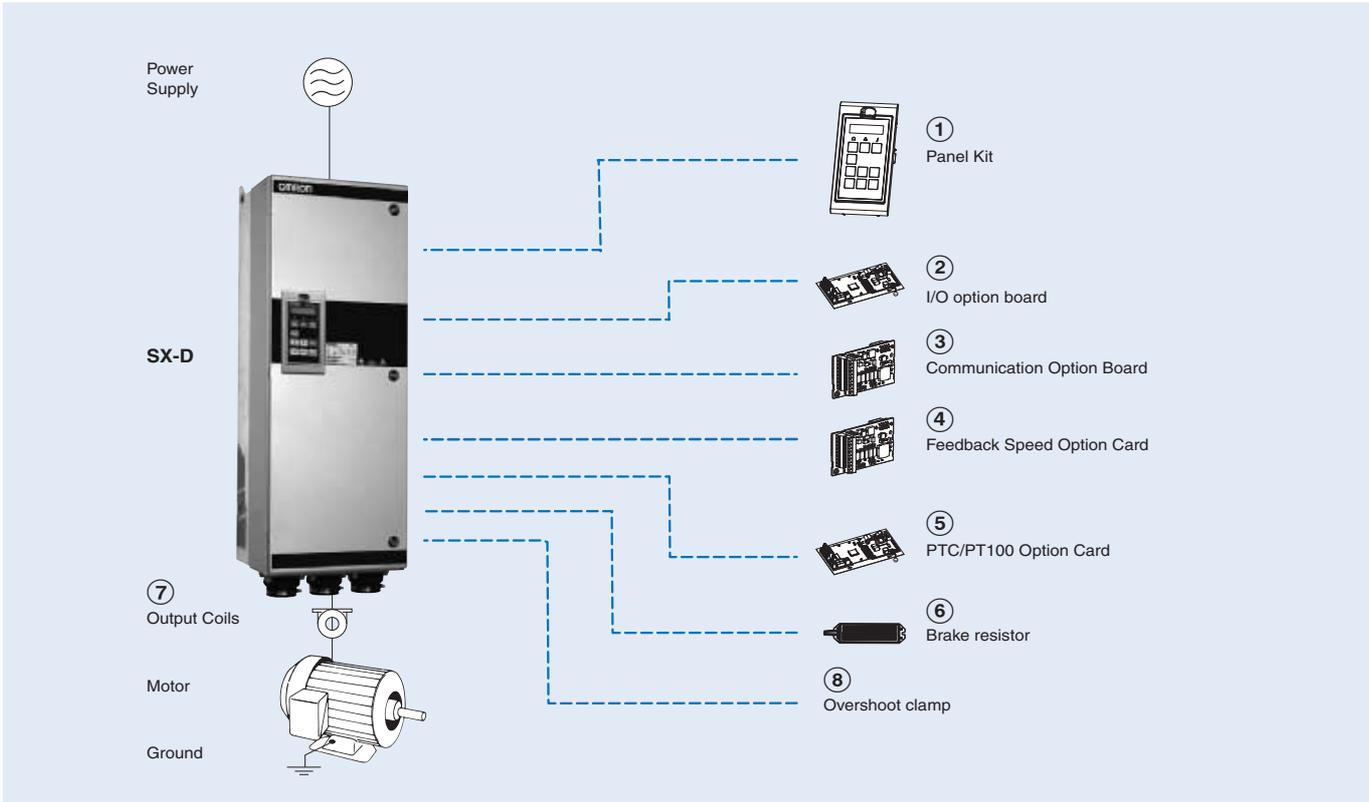

SX-D

Voltage	Specifications				Model	
	Heavy Duty		Normal Duty		Direct torque control	V/F
400 V	75 kW	140 A	90 kW	175 A	SX-D4090-EF	SX-D4090-EV
	90 kW	168 A	110 kW	210 A	SX-D4110-EF	SX-D4110-EV
	110 kW	200 A	132 kW	250 A	SX-D4132-EF	SX-D4132-EV
	132 kW	240 A	160 kW	300 A	SX-D4160-EF	SX-D4160-EV
	160 kW	300 A	200 kW	375 A	SX-D4200-EF	SX-D4200-EV
	200 kW	344 A	220 kW	430 A	SX-D4220-EF	SX-D4220-EV
	220 kW	400 A	250 kW	500 A	SX-D4250-EF	SX-D4250-EV
	250 kW	480 A	315 kW	600 A	SX-D4315-EF	SX-D4315-EV
	315 kW	520 A	355 kW	650 A	SX-D4355-EF	SX-D4355-EV
	355 kW	600 A	400 kW	750 A	SX-D4400-EF	SX-D4400-EV
	400 kW	688 A	450 kW	680 A	SX-D4450-EF	SX-D4450-EV
	450 kW	800 A	500 kW	1000 A	SX-D4500-EF	SX-D4500-EV
690 V	500 kW	960 A	630 kW	1200 A	SX-D4630-EF	SX-D4630-EV
	630 kW	1200 A	800 kW	1500 A	SX-D4800-EF	SX-D4800-EV
	75 kW	72 A	90 kW	90 A	SX-D6090-EF	SX-D6090-EV
	90 kW	87 A	110 kW	109 A	SX-D6110-EF	SX-D6110-EV
	110 kW	117 A	132 kW	146 A	SX-D6132-EF	SX-D6132-EV
	132 kW	140 A	160 kW	175 A	SX-D6160-EF	SX-D6160-EV
	160 kW	168 A	200 kW	210 A	SX-D6200-EF	SX-D6200-EV
	200 kW	200 A	250 kW	250 A	SX-D6250-EF	SX-D6250-EV
	250 kW	240 A	315 kW	300 A	SX-D6315-EF	SX-D6315-EV
	315 kW	300 A	355 kW	375 A	SX-D6355-EF	SX-D6355-EV
	315 kW	344 A	450 kW	430 A	SX-D6450-EF	SX-D6450-EV
	355 kW	400 A	500 kW	500 A	SX-D6500-EF	SX-D6500-EV
	450 kW	480 A	600 kW	600 A	SX-D6600-EF	SX-D6600-EV
	500 kW	520 A	630 kW	650 A	SX-D6630-EF	SX-D6630-EV
	600 kW	600 A	710 kW	750 A	SX-D6710-EF	SX-D6710-EV
	650 kW	688 A	800 kW	860 A	SX-D6800-EF	SX-D6800-EV
710 kW	720 A	900 kW	900 A	SX-D6900-EF	SX-D6900-EV	
800 kW	800 A	1000 kW	1000 A	SX-D61K0-EF	SX-D61K0-EV	

① Panel Kit

Model	Description	Function
01-3957-00	Panel kit	Panel kit complete including panel
01-3957-01	Blank panel kit	Panel kit complete including blank panel

② I/O option board

Model	Description	Function
01-3876-01	Additional I/O option	Provides 3 extra relay outputs and 3 additional digital inputs
01-3876-07	Crane option	Dedicated option board for crane application, including additional I/O and functions

③ Communication option board

Type	Model	Description	Function
Communication option board	01-3876-04	RS232/485	• MODBUS RTU serial communication by RS232 or RS485 interface with galvanic isolation
	01-3876-05	PROFIBUS-DP option card	• Used for running or stopping the inverter through PROFIBUS-DP communication with the host controller.
	01-3876-06	DeviceNet option card	• Used for running or stopping the inverter through DeviceNet communication with the host controller.
	01-3876-09	Modbus/TCP, Ethernet	• Used for running or stopping the inverter through Modbus/TCP communication with the host controller.

④ Encoder feedback option card

Model	Description	Function
01-3876-03	Encoder option	Used for connection of the actual motor speed via encoder. Up to 100kHz with TTL and HTL incremental encoders with 5/24 V power supply

⑤ PTC/PT100 option card

Model	Description	Function
01-3876-08	Thermal protection	Allows to connect a motor thermistor to the inverter

⑥ Braking chopper and braking resistor

All inverter sizes could be fitted with an optional built-in brake chopper from factory but is not possible to install it later. The choice of the resistor depends on the application switch-on duration and duty-cycle. Following tables describes the activation level of the built-in braking chopper and the minimum resistor that could be used depending on the input voltage.

Type	400 V			Type	600 V		
	R for different input voltage (Ω)				R for different input voltage (Ω)		
	220-240 VAC	380-415 VAC	440-480 VAC		500-525 VAC	550-600 VAC	660-690 VAC
SX-D4090-EF	3.8	3.8	4.4	SX-D6090-EF	4.9	5.7	6.5
SX-D4110-EF	2.7	2.7	3.1	SX-D6110-EF	4.9	5.7	6.5
SX-D4132-EF	2.7	2.7	3.1	SX-D6132-EF	4.9	5.7	6.5
SX-D4160-EF	2 x 3.8	2 x 3.8	2 x 4.4	SX-D6160-EF	4.9	5.7	6.5
SX-D4200-EF	2 x 3.8	2 x 3.8	2 x 4.4	SX-D6200-EF	2 x 4.9	2 x 5.7	2 x 6.5
SX-D4220-EF	2 x 2.7	2 x 2.7	2 x 3.1	SX-D6250-EF	2 x 4.9	2 x 5.7	2 x 6.5
SX-D4250-EF	2 x 2.7	2 x 2.7	2 x 3.1	SX-D6315-EF	2 x 4.9	2 x 5.7	2 x 6.5
SX-D4315-EF	3 x 2.7	3 x 2.7	3 x 3.1	SX-D6355-EF	2 x 4.9	2 x 5.7	2 x 6.5
SX-D4355-EF	3 x 2.7	3 x 2.7	3 x 3.1	SX-D6450-EF	3 x 4.9	3 x 5.7	3 x 5.7
SX-D4400-EF	3 x 2.7	3 x 2.7	3 x 3.1	SX-D6500-EF	3 x 4.9	3 x 5.7	3 x 5.7
SX-D4450-EF	4 x 2.7	4 x 2.7	4 x 3.1	SX-D6600-EF	4 x 4.9	4 x 5.7	4 x 5.7
SX-D4500-EF	4 x 2.7	4 x 2.7	4 x 3.1	SX-D6630-EF	4 x 4.9	4 x 5.7	4 x 5.7
SX-D4630-EF	6 x 2.7	6 x 2.7	6 x 3.1	SX-D6710-EF	6 x 4.9	6 x 5.7	6 x 5.7
SX-D4800-EF	6 x 2.7	6 x 2.7	6 x 3.1	SX-D6800-EF	6 x 4.9	6 x 5.7	6 x 5.7
				SX-D6900-EF	6 x 4.9	6 x 5.7	6 x 5.7
				SX-D61K0-EF	6 x 4.9	6 x 5.7	6 x 5.7

Supply voltage (VAC)	Built-in brake chopper trigger level (VDC)
220-240	380
380-415	660
440-480	780
500-525	860
550-600	1000
660-690	1150

⑦ Output coils

Output coils above SX-D4132-EF for the 400V and SX-D6160-EF should be order from factory as they should be installed inside of the cabinet

Voltage	Inverter model	Model	Rated current	Inductance	Rated Voltage	Max carrier	Max output voltage	Max temp
400V	SX-D4090-EF	473171 00	175A	0.05 mH	800V	6 KHz	200	40°C
	SX-D4110-EF	473172 00	275A	0.032 mH		1.5 kHz	100	
	SX-D4132-EF					6 kHz	200	
690V	SX-D6090-EF	473169 00	90A	0.1 mH		6 kHz	200	
	SX-D6110-EF	473170 00	146A	0.05 mH		6 kHz	200	
	SX-D6132-EF					6 kHz	200	
	SX-D6160-EF	473171 00	175A	0.05 mH	6 kHz	200		

⑧ Overshoot clamp

Only two types of overshoot clamps could be order for after mounting

Model	Inverter	Function
52163	SX-4090 to SX-4132 SX-6090 to SX-6160	Together with the output coils, the overshoot clamp restricts the voltage and the dV/dt on the motor winding. Inverters must be ordered including the option DC+/DC- connectors.
52220	SX-4160 to SX-4800 SX-6200 to SX-61K0	Together with the output coils, the overshoot clamp restricts the voltage and the dU/dt on the motor winding. Doesn't require the "DC+/DC-" option.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.  
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.