
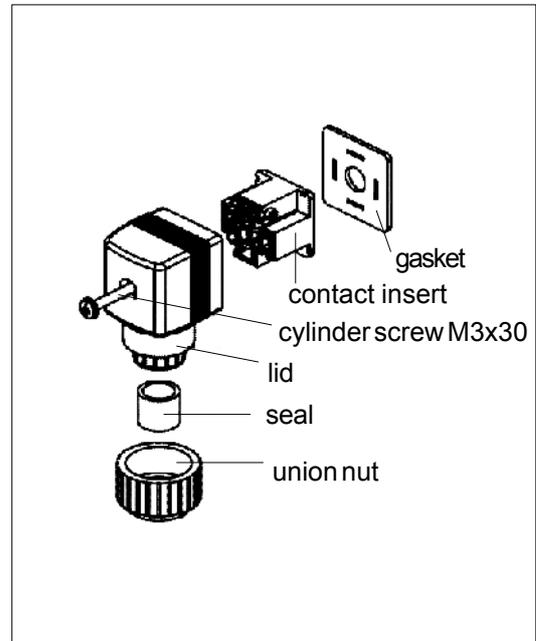


Solenoid Valve 7090

3/2-way-valve with manual operation for piloting of pneumatically operated valves.

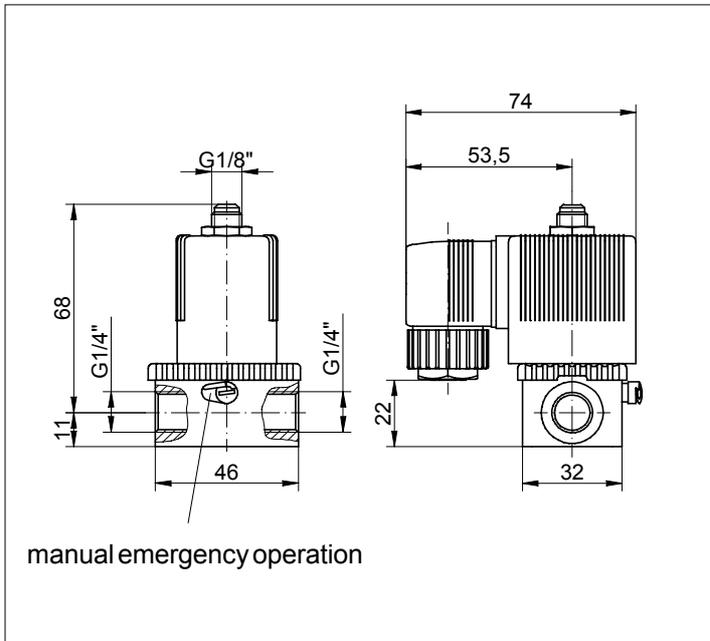

Technical Information

Nominal size	2 mm
Nominal pressure	0 - 10 bar
Kvs-value	0,11
Ambient temperature	-10°C bis + 55 °C
Fluid temperature	max. 100 °C
Switching time	ca. 10 - 15 ms
Seating material	FKM (Viton)
Body material	brass
Inner parts	stainless steel
Connections	230 V 50/60 Hz 24 VA 24 V DC 8 W others on request
Voltage tolerance	± 10%
Protection class	IP 65 (with connector)
Duty cycle	100%

Connection

