


Linear measurement

DW10000-135-PA-H1141

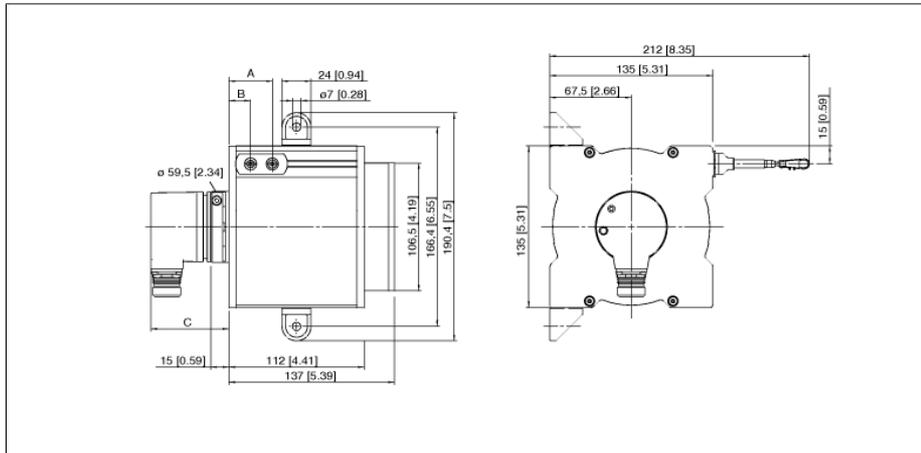

- Measuring range up to 10000mm
- M12 connector
- Protection class: IP65
- Potentiometric output 1k Ohm
- Supply voltage max. 30 VDC

Type	DW10000-135-PA-H1141
Ident-No.	1544557
Measuring range [A...B]	0...10000mm
Linearity deviation	≤ 0.1 % of full scale
Ambient temperature	-20...+85 °C
Operating voltage	0...30VDC
Short-circuit protection	yes
Output function	3-wire, Analog output
Housing material	Titan anodized aluminium
min. extension force	8.7 N
max. extension force	16.9 N
max. extension speed	6 m/s
max. extension speed	80 m/s ²
wire material	Stainless steel
Connection	connector, M12 x 1
Protection class	IP65

**Linear measurement
DW10000-135-PA-H1141**

Pin configuration

Signal	+U_s	Slider	Gnd	-	-	-	-	-	-
Pin configura- tion	1	2	3	4	-	-	-	-	-

Linear measurement

DW10000-135-PA-H1141

Accessories

Type code	Ident-No.	Short text	Dimension drawing
RDR-1	1544753	Deflection roller for aluminium draw-wire sensors	