



**Signal light
tower light
TL50BQ**



- 1 LED color: Blue (COL1)
- Operating voltage: 12...30 VDC
- Inputs: PNP/NPN

Wiring diagram

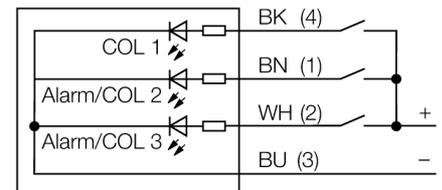

Functional principle

Monochrome multifunction signaller
Rugged and well-priced LED tower, easy to install
Illuminated segments for clear operator guidance and display of system status
Display of up to 5 colors
Compact devices, no controller required
No mounting
The wiring diagram shows a PNP pin assignment

Type	TL50BQ
Ident-No.	3010583
Light type	blue
Ambient temperature	-40...+50 °C
Operating voltage	18...30VDC
Operating voltage	21...27 VAC
DC rated operational current	≤ 100 mA
AC rated operational current	≤ 100 mA
Response time	< 10 ms
Design	cylindrical/threaded
Housing diameter	50 mm
Housing material	Plastic, ABS
Connection	connector, M12 x 1
Protection class	IP67