


**light screen for machine safety applications**  
**receiver**  
**LS2TR30-1800Q8**


- personnel safety category 2 (IEC 61496-1,-2), category 2 acc.to ISO 13849-1 (EN 954-1)
- male connector, M12 x 1, 8-pole
- switching output without latching function
- detection zone height 1,800 mm
- resolution 30 mm
- operational voltage 24 VDC +15%
- Internal test in 500 ms cycle
- degree of protection IP65

**Wiring diagram**

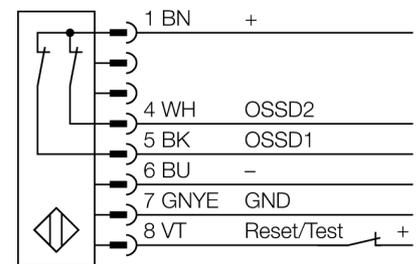

**Functional principle**

The safety light curtain consists of an emitter and a receiver. The system is optically synchronized, making the wiring between emitter and receiver redundant. The receiver's safety switching outputs are directly connected to a load relay and trigger an immediate stop of the dangerous machine cycle. Due to the dual-channel design of the switching device, personal safety degree type 2 acc.to IEC 61496 and category 2 acc. to EN 9541 are fulfilled.

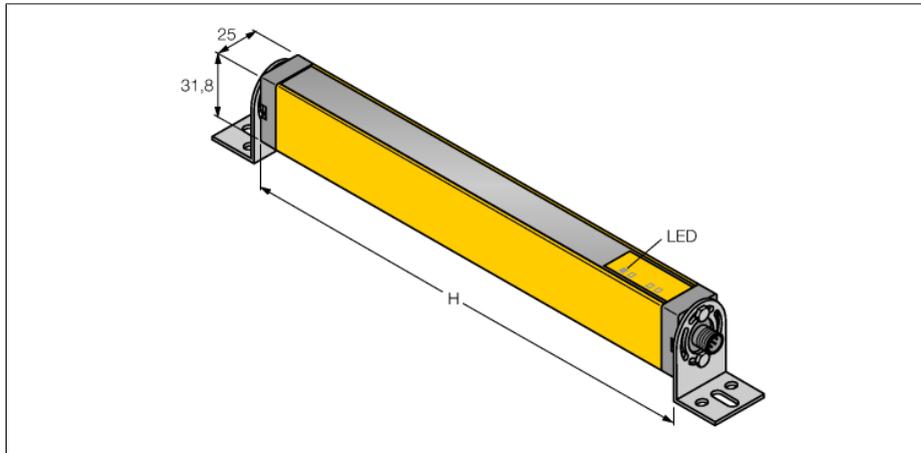

<b>Type</b>	LS2TR30-1800Q8
Ident-No.	3077251
<b>Operating mode</b>	light screen
Light type	IR
Wavelength	950 nm
Optical resolution	30 mm
Range	200...15000 mm
Detection zone height	1800 mm
Ambient temperature	0...+55 °C
<b>Operating voltage</b>	20...28VDC
No-load current I <sub>0</sub>	≤ 90 mA
Output function	2x NC, 2 x PNP
Response time	< 29 ms
<b>Design</b>	rectangular, EZ-Screen
Dimensions	31.8 mm x 25.2 mm x 1863 mm
Housing material	Metal, AL
Lens	plastic, acrylic
Connection	connector, M12 x 1
Protection class	IP65
<b>Operating voltage</b>	LED green
Switching state	LED red

**light screen for machine safety applications  
receiver  
LS2TR30-1800Q8**

**TURCK**

Industrial  
Automation

**Function accessories**

Type code	Ident-No.	Short text	Dimension drawing
IM-T-9A	3061425	Safety relay, 2 inputs, 3 NO outputs, 24 VDC, provides max. 6 A, 20 ms response time	