



**gateway for BL20 I/O system  
interface for CANopen incl. supply  
BL20-GWBR-CANOPEN**

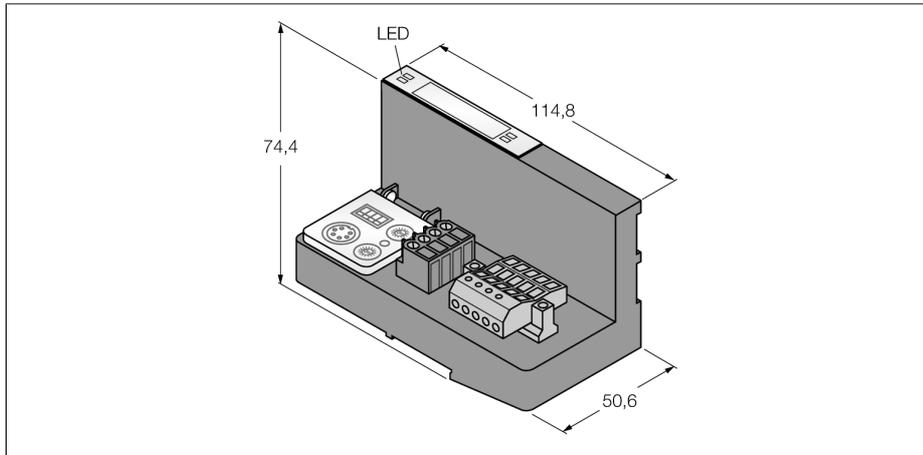

- rotary coding switch for adjustment of the node address
- degree of protection IP20
- 2 x end brackets BL20-WEW35/2-SW
- 1 x end plate BL20-ABPL
- with integrated supply
- LEDs for display of supply voltage, common alarm and bus errors
- interface between BL20 system and CAN bus
- 20 kbps up to 1000 kbps
- the connection to CANopen is established via an open-style connector

<b>Type</b>	BL20-GWBR-CANOPEN
Ident-No.	6827167
<hr/>	
<b>Supply voltage</b>	24VDC
System power supply	24 VDC / 5 VDC
Field supply	24 VDC
Admissible range	18...30 VDC
Rated current from module bus	≤ 350 mA
Max. field supply current	10 A
Max. system supply current	1.2 A
Voltage supply connection	screw connection
<hr/>	
<b>Fieldbus transmission rate</b>	20 kbps ... 1 mbps
Fieldbus addressing	2 rotary switches
Fieldbus addressing range	1...99
Service interface	PS/2 socket for I/O-ASSISTANT
Fieldbus connection technology	open connector
Fieldbus termination	external
<hr/>	
<b>Dimensions (W x L x H)</b>	50.6x114.8x74.4mm
Approvals	CE, cULus, zone2, ClassI,div.2.
Operating temperature	0...55 °C
Storage temperature	-25 to +85 °C
Relative humidity	5 to 95% (internal), Level RH-2, no condensation (at 45 °C storage)
Vibration test	acc. to EN 61131
Shock test	acc. to IEC 68-2-27
Drop and topple	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Electro-magnetic compatibility	acc. to EN 50,082-2
Protection class	IP20
<hr/>	
<b>Included in scope of supply</b>	2 x end brackets BL20-WEW-35/2-SW, 1 x end plate BL20-ABPL

**Field supply/system supply**

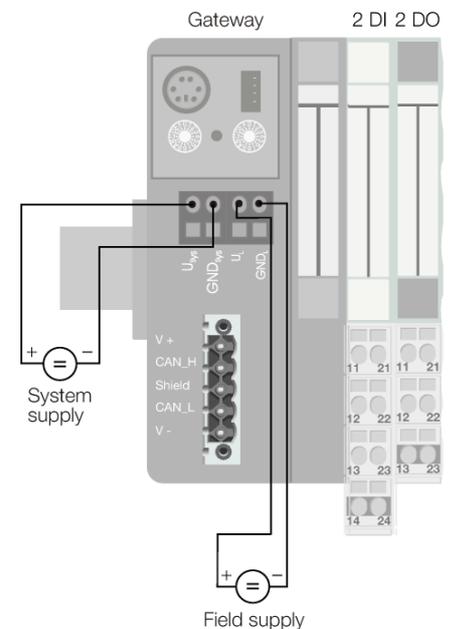


**Functional principle**

BL20 gateways are the head component of a BL20 station. They are designed to interface the modular fieldbus nodes to the higher level fieldbus (PROFIBUS-DP, DeviceNet, CANopen, Ethernet).

All BL20 electronic modules communicate over the internal module bus, the data of which is transferred to the fieldbus via the gateway, so that all I/O modules can be configured independently of the bus system.

gateway for BL20 I/O system  
 interface for CANopen incl. supply  
 BL20-GWBR-CANOPEN

**Wiring accessories**

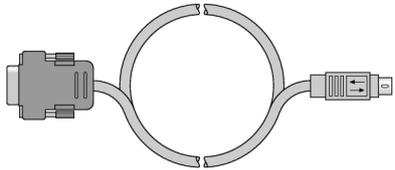Type code	Ident-No.	Short text	Dimension drawing
I/O-ASSISTANT-KA-BEL-BL20/BL67	6827133	RS232 adapter cable for the BL67/BL20 service interface	
BS3511/KLBUE4-31.5	6827342	Shield terminal and strain relief for bus cable	